

Features

- Frequency Range: LO & RF – 500 MHz, IF 2 – 500 MHz
- L.O. Drive: +10 dBm
- Industry Standard SMT package
- Available in Tape-and -Reel
- Low Cost

Description

The MXB-0502-10 is a medium drive level, surface mount mixer designed for applications that require small, low cost and highly reliable surface mount components. This mixer is a double balanced design for wideband high dynamic range use in communications up and down-converter applications.

Specifications

Parameter	Min	Typ	Max
Frequency Range (MHz)	2		500
Conversion Loss (dB)		6.8	8.0
LO – RF Isolation (dB)	30	40	
LO – IF Isolation (dB)	25	38	
IIP ₃ (dBm)		+16	

Notes: Test Conditions-LO +10 dBm, RF -10 dBm, IF 30 MHz.
Typical values represent Mid-band performance @ 25°C.


SURFACE MOUNT MIXER




Absolute Maximum Ratings

Parameter	Maximum
RF Power	+ 17 dBm
Operating Temperature	-50 to +80 °C
Storage Temperature	-65 to +100 °C
Re-flow Temperature	+ 240 °C

Schematic

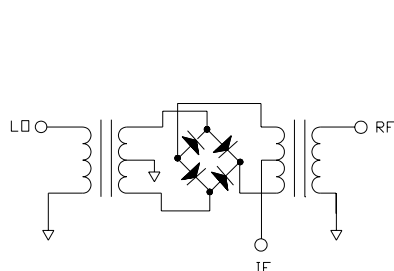


Package – S07

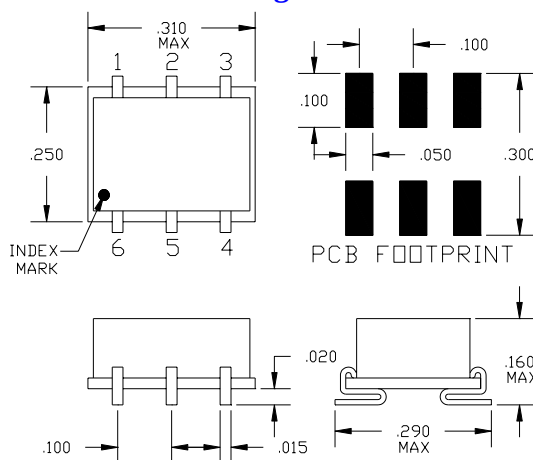


Pin Functions

Function	Pin
LO INPUT	1
RF INPUT	4
IF OUTPUT	5
GROUND	2,3,6

Typical Test Data – Conversion Loss

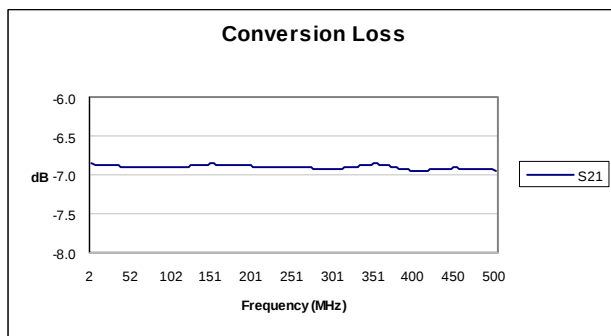

Typical Test Data – LO-RF and LO-IF Isolation

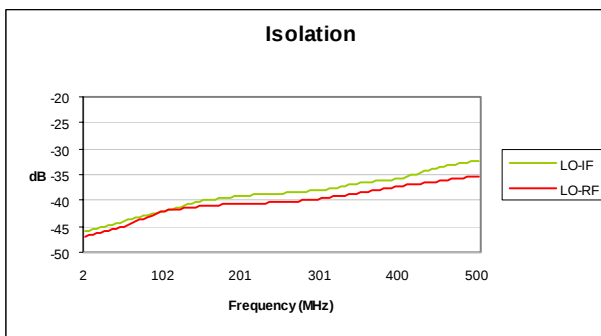

Specifications and information on this data sheet are subject to change without notice..