

Part No.

**AA-483HD/502**


Diff No. 004

4.8 mm

LED Assembly

Type : 502

Package Dimension :

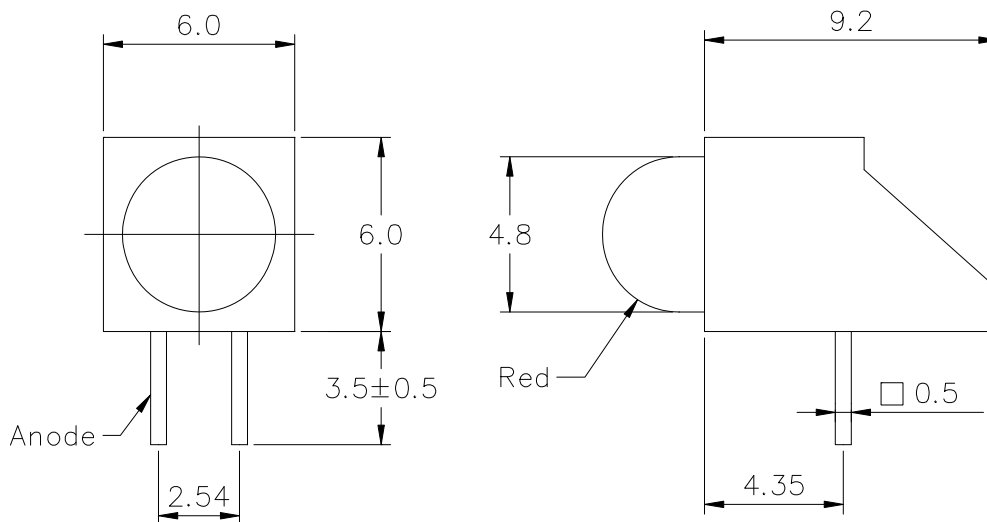

Notes:

1. All dimensions are in millimeter.
2. An epoxy meniscus may extend about.  
1. 5mm(0.059") down to the lead
3. Tolerances unless Dimension  $\pm 0.25\text{mm}$

■ Features :

- Choice of various viewing angle.
- Available on Tape and Reel.
- Reliable and robust.

■ Descriptions :

- The series is specially designed for application requiring higher brightness.
- The LED lamps are available with different colors, intensity, epoxy colors etc.

■ Applications :

- TV set
- Monitor
- Telephone

Part No. **AA-483HD/502**

Diff No. 004

4.8 mm

LED Assembly

Type : 502

| PART NO.     | Chip     |               | Lens Color   |
|--------------|----------|---------------|--------------|
|              | Material | Emitted Color |              |
| AA-483HD/502 | GaP/GaP  | Red           | Red Diffused |

## ■ Absolute Maximum Ratings at Ta=25°C

| Parameter                                | Symbol                | Rating     | Unit |
|------------------------------------------|-----------------------|------------|------|
| Forward Current                          | I <sub>F</sub>        | 20         | mA   |
| Operating Temperature                    | T <sub>opr</sub>      | -40 to +80 | °C   |
| Storage Temperature                      | T <sub>stg</sub>      | -40 to +85 | °C   |
| Soldering Temperature                    | T <sub>sol</sub>      | 260 ± 5    | °C   |
| Electrostatic Discharge                  | ESD                   | 1000       | V    |
| Power Dissipation                        | P <sub>D</sub>        | 100        | mW   |
| Peak Forward Current<br>(Duty 1/10@1KHz) | I <sub>F</sub> (Peak) | 160        | mA   |
| Reverse Voltage                          | V <sub>R</sub>        | 5          | V    |

## ■ Electronic Optical Characteristics :

| Parameter                    | Symbol            | Min. | Typ. | Max. | Unit | Condition            |
|------------------------------|-------------------|------|------|------|------|----------------------|
| Luminous Intensity           | I <sub>v</sub>    | /    | 25   | /    | mcd  | I <sub>F</sub> =20mA |
| Viewing Angle                | 2θ <sub>1/2</sub> | /    | 40   | /    | deg  | I <sub>F</sub> =20mA |
| Peak Wavelength              | λ <sub>p</sub>    | /    | /    | /    | nm   | I <sub>F</sub> =20mA |
| Dominant Wavelength          | λ <sub>d</sub>    | /    | 700  | /    | nm   | I <sub>F</sub> =20mA |
| Spectrum Radiation Bandwidth | △λ                | /    | 90   | /    | nm   | I <sub>F</sub> =20mA |
| Forward Voltage              | V <sub>F</sub>    | /    | 2.0  | 2.6  | V    | I <sub>F</sub> =20mA |
| Reverse Current              | I <sub>R</sub>    | /    | /    | 10   | μA   | V <sub>R</sub> =5V   |

Part No. **AA-483HD/502**

Diff No. 004

4.8 mm

LED Assembly

Type : 502

## ■ Reliability test items and conditions :

| NO | Item                             | Test Conditions                              | Test Hours/Cycle | Sample Size | Ac/Re |
|----|----------------------------------|----------------------------------------------|------------------|-------------|-------|
| 1  | Solder Heat                      | TEMP : 260°C ±5°C                            | 5 SEC            | 76 PCS      | 0/1   |
| 2  | Temperature Cycle                | H : +85°C 30min<br>└ 5min<br>L : -55°C 30min | 50 CYCLES        | 76 PCS      | 0/1   |
| 3  | Thermal Shock                    | H : +100°C 5min<br>└ 10set<br>L : -10°C 5min | 50 CYCLES        | 76 PCS      | 0/1   |
| 4  | High Temperature Storage         | TEMP : 100°C                                 | 1000 HRS         | 76 PCS      | 0/1   |
| 5  | Low Temperature Storage          | TEMP : -55°C                                 | 1000 HRS         | 76 PCS      | 0/1   |
| 6  | DC Operating Life                | TEMP : 25°C<br>I <sub>F</sub> =20mA          | 1000 HRS         | 76 PCS      | 0/1   |
| 7  | High Temperature / High Humidity | 85°C / 85%RH                                 | 1000 HRS         | 76 PCS      | 0/1   |

Part No.

**AA-483HD/502**



Diff No. 004

4.8 mm

LED Assembly

Type : 502

◆ TYPICAL ELECTRICAL-OPTICAL CHARACTERISTICS CURVES

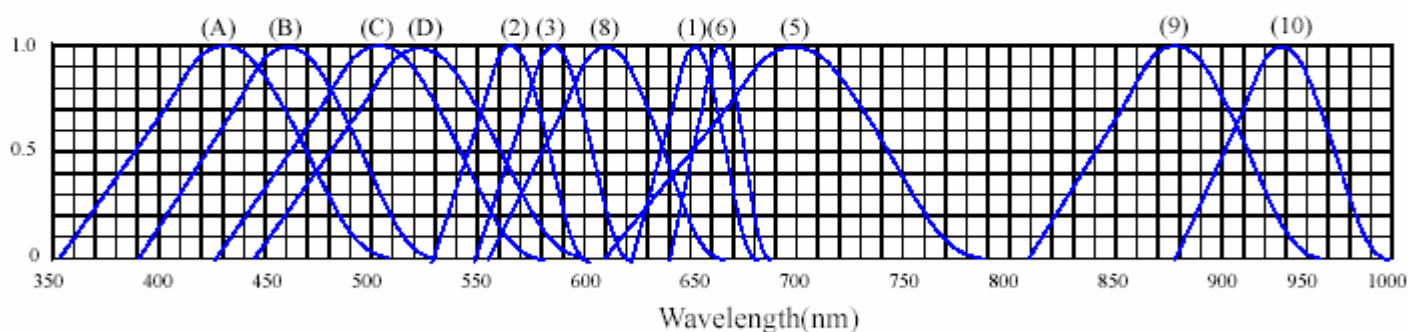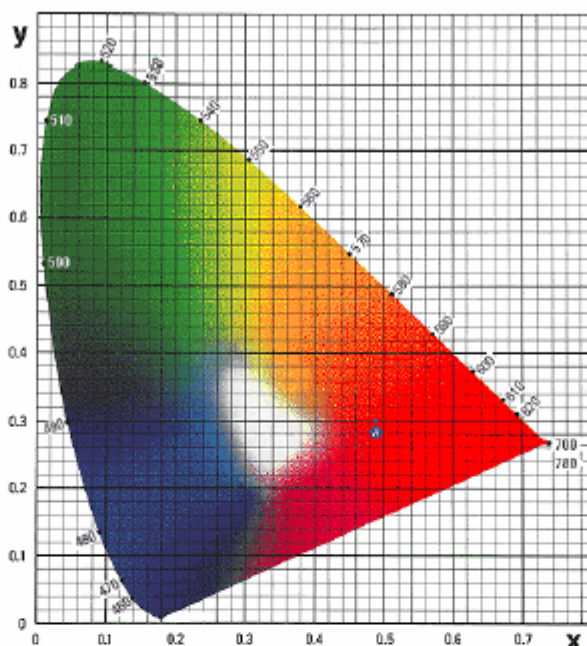

- (1) GaAsP/GaAs 655nm/Red
- (2) GaP 568nm/ Yellow Green
- (3) GaAsP/GaP 585nm/Yellow
- (4) GaAsP/GaP 635nm/Orange & Hi-Eff Red
- (5) GaP 700nm/Bright Red
- (6) GaAlAs/GaAs 660nm/Super Red
- (8) GaAsP/GaP 610nm/Super Red

- (9)- GaAlAs 880nm
- (10)-GaAs/GaAs&GaAlAs/GaAs 940nm
- (A)- GaN 430nm/Blue
- (B)- InGaN 470nm/Blue
- (C)- InGaN 502nm/Ultra Green
- (D)- InGaN 523nm/Ultra Green

Part No.

**AA-483HD/502**

Diff No. 004


4.8 mm

LED Assembly


Type : 502

◆ CHARACTERISTICS DIAGRAMS

FORWARD CURRENT VS. FORWARD VOLTAGE

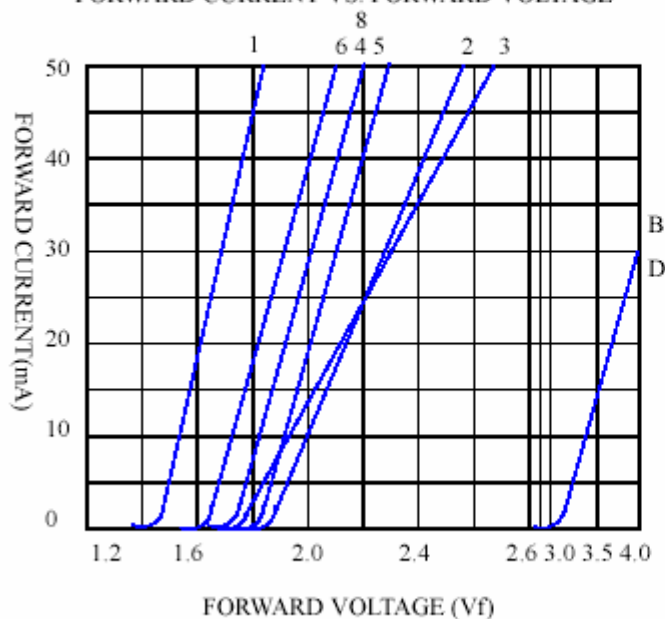

RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

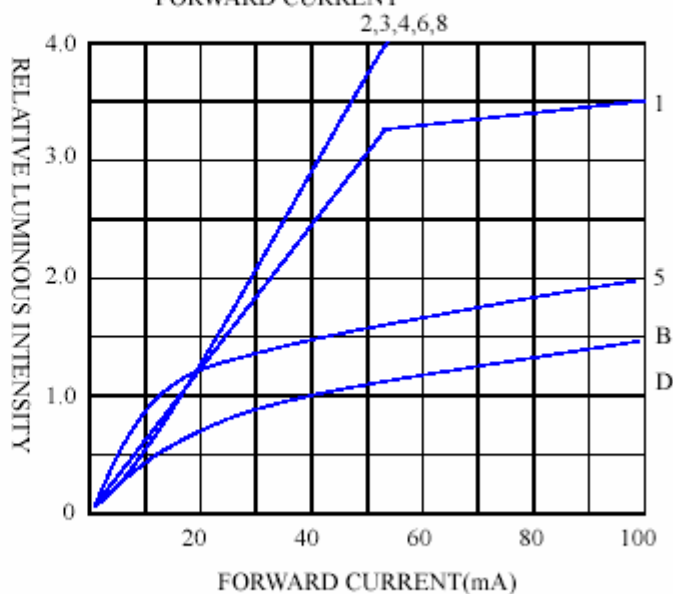

FORWARD CURRENT VS. AMBIENT TEMPERATURE

