


SKiiP 29AHB08V1

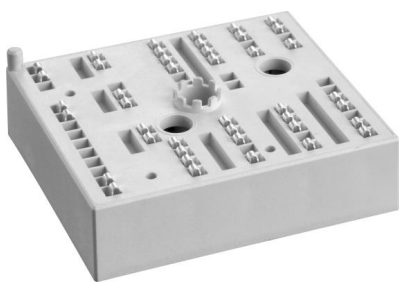

MiniSKiiP® 2

3-phase bridge rectifier + brake chopper

SKiiP 29AHB08V1

Features

- Ultrafast NPT IGBTs
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connenctions
- UL recognised file no. E63532

Typical Applications


- Input bridge for Inverter up to 30 kVA

Remarks

- V_{CEsat} , V_F = chip level value

Absolute Maximum Ratings		T _s = 25 °C, unless otherwise specified	
Symbol	Conditions	Values	Units
IGBT - Chopper			
V _{CES}	T _s = 25 (70) °C t _p ≤ 1 ms	600	V
I _C		125 (93)	A
I _{CRM}		300	A
V _{GES}		± 15	V
T _j		- 40 ... + 150	°C
Diode - Chopper			
I _F	T _s = 25 (70) °C t _p ≤ 1 ms	120 (89)	A
I _{FRM}		300	A
T _j		- 40 ... + 150	°C
Diode / Thyristor - Rectifier			
V _{RRM}	T _s = 70 t _p = 10 ms, sin 180 °, T _j = 25 °C i ² t t _p = 10 ms, sin 180 °, T _j = 25 °C Diode Thyristor	800	V
I _F / I _T		82	A
I _{FSM} / I _{TSM}		1000	A
i ² t		5500	A ² s
T _j		- 40 ... + 150	°C
T _j		- 40 ... + 125	°C
I _{IRMS}	per power terminal (20 A / spring)	120	A
T _{stg}	T _{op} ≤ T _{stg}	- 40 ... + 125	°C
V _{isol}	AC, 1 min.	2500	V

Characteristics		$T_s = 25\text{ °C}$, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
IGBT - Chopper					
V_{CEsat}	$I_{Cnom} = 150\text{ A}$, $T_j = 25\text{ (125) °C}$		2 (2,2)	2,5 (2,7)	V
$V_{GE(th)}$	$V_{GE} = V_{CE}$, $I_C = 3\text{ mA}$	3	4	5	V
$V_{CE(TO)}$	$T_j = 25\text{ (125) °C}$		1,2 (1,1)	1,3 (1,2)	V
r_T	$T_j = 25\text{ (125) °C}$		5,3 (7,3)	8 (10)	mΩ
C_{ies}	$V_{CE} = 25\text{ V}$, $V_{GE} = 0\text{ V}$, $f = 1\text{ MHz}$		9		nF
C_{oes}	$V_{CE} = 25\text{ V}$, $V_{GE} = 0\text{ V}$, $f = 1\text{ MHz}$		1,7		nF
C_{res}	$V_{CE} = 25\text{ V}$, $V_{GE} = 0\text{ V}$, $f = 1\text{ MHz}$		2,1		nF
$R_{th(j-s)}$	per IGBT		0,4		K/W
$t_{d(on)}$	under following conditions		20		ns
t_r	$V_{CC} = 300\text{ V}$, $V_{GE} = \pm 15\text{ V}$		25		ns
$t_{d(off)}$	$I_{Cnom} = 150\text{ A}$, $T_j = 125\text{ °C}$		185		ns
t_f	$R_{Gon} = R_{Goff} = 4\text{ Ω}$		15		ns
E_{on}	inductive load		5,7		mJ
E_{off}			3,7		mJ
Diode - Chopper					
$V_F = V_{EC}$	$I_{Fnom} = 150\text{ A}$, $T_j = 25\text{ (125) °C}$		1,7 (1,7)	2,1 (2,1)	V
$V_{(TO)}$	$T_j = 25\text{ (125) °C}$		1 (0,9)	1,1 (1)	V
r_T	$T_j = 25\text{ (125) °C}$		4,7 (5,3)	6,7 (7,3)	mΩ
$R_{th(j-s)}$	per diode		0,55		K/W
I_{RRM}	under following conditions		270		A
Q_{rr}	$I_{Fnom} = 150\text{ A}$, $V_R = 300\text{ V}$		18		μC
E_{rr}	$V_{GE} = 0\text{ V}$, $T_j = 125\text{ °C}$ $di_F/dt = 13700\text{ A/μs}$		3,5		mJ



AHB

Characteristics		$T_s = 25\text{ °C}$, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
Diode - Rectifier					
V_F	$I_{Fnom} = 75\text{ A}$, $T_j = 25\text{ °C}$		1,2		V
$V_{(TO)}$	$T_j = 150\text{ °C}$		0,8		V
r_T	$T_j = 150\text{ °C}$		7		mΩ
$R_{th(j-s)}$	per diode		0,7		K/W
Thyristor - Rectifier					
V_T	$I_{Fnom} = 120\text{ A}$, $T_j = 25\text{ (125) °C}$			1,8 (1,7)	V
$V_{T(TO)}$	$T_j = 125\text{ °C}$			1,1	V
r_T	$T_j = 125\text{ °C}$			5	mΩ
V_{GT}	$T_j = 25\text{ °C}$			3	V
I_{GT}	$T_j = 25\text{ °C}$	150			mA
I_H	$T_j = 25\text{ °C}$		200		mA
I_L	$T_j = 25\text{ °C}$		400		mA
$dv/dt_{(cr)}$	$T_j = 125\text{ °C}$			1000	V/μs
$di/dt_{(cr)}$	$T_j = 125\text{ °C}$			50	A/μs
$R_{th(j-s)}$	per thyristor		0,65		K/W
Temperature Sensor					
R_{ts}	3 %, $T_r = 25\text{ (100) °C}$		1000(1670)		Ω
Mechanical Data					
w			65		g
M_s	Mounting torque	2		2,5	Nm

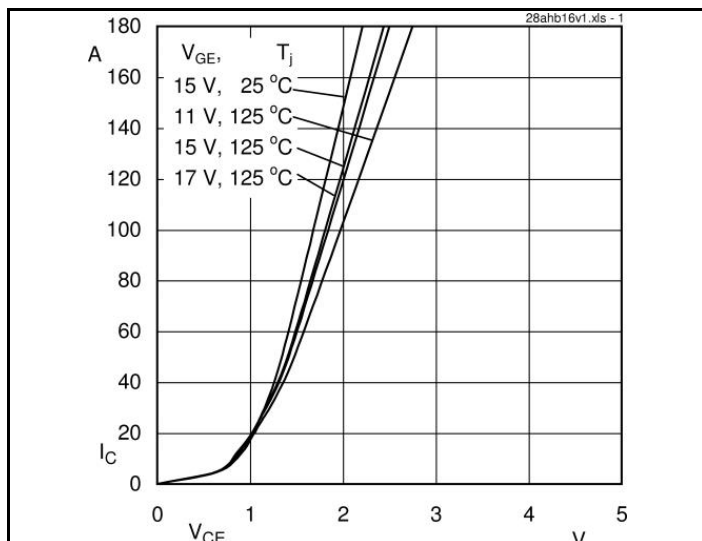


Fig. 1 Typ. output characteristic

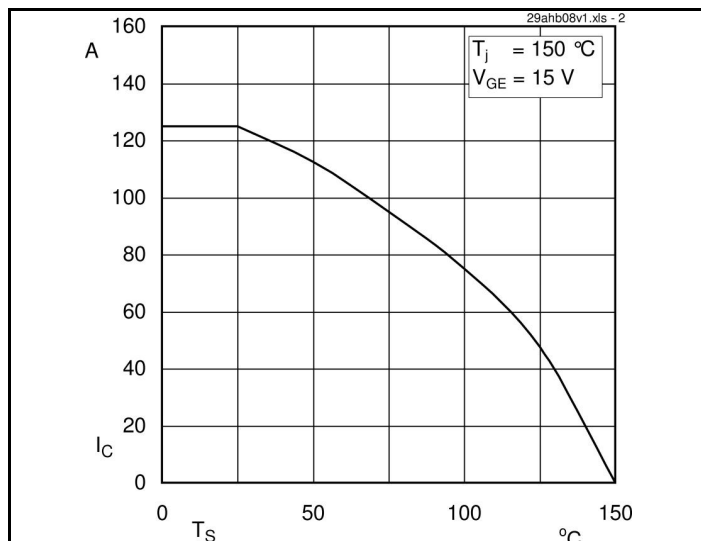


Fig. 2 Typ. rated current vs. temperature

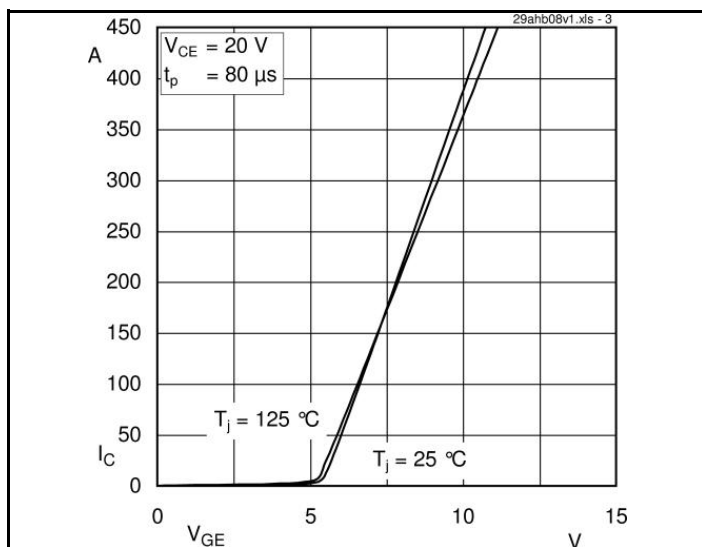


Fig. 3 Typ. transfer characteristic

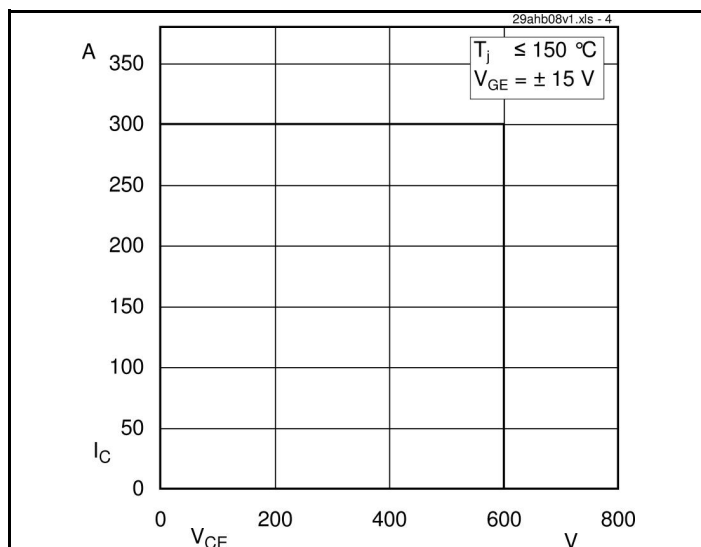


Fig. 4 Reverse bias safe operating area

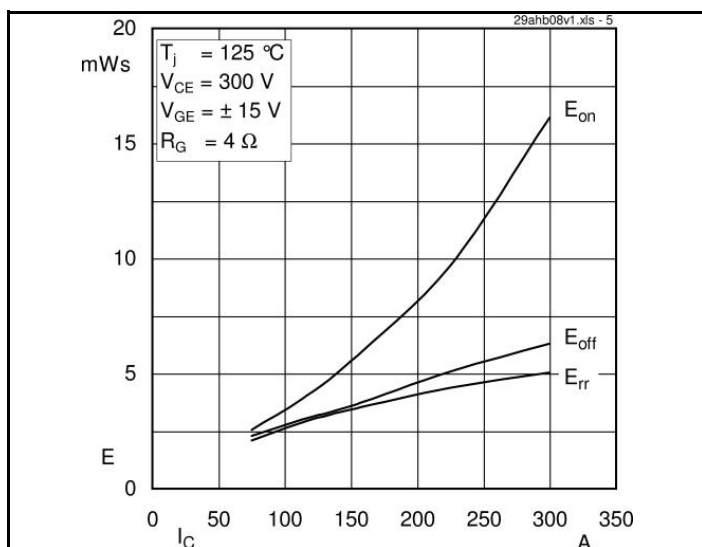


Fig. 5 Typ. Turn-on /-off energy = $f(I_C)$








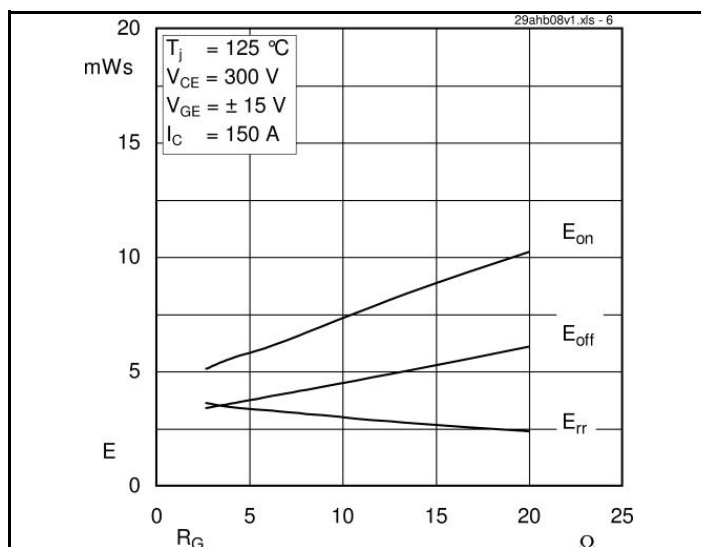


Fig. 6 Typ. Turn-on /-off energy = $f(R_G)$

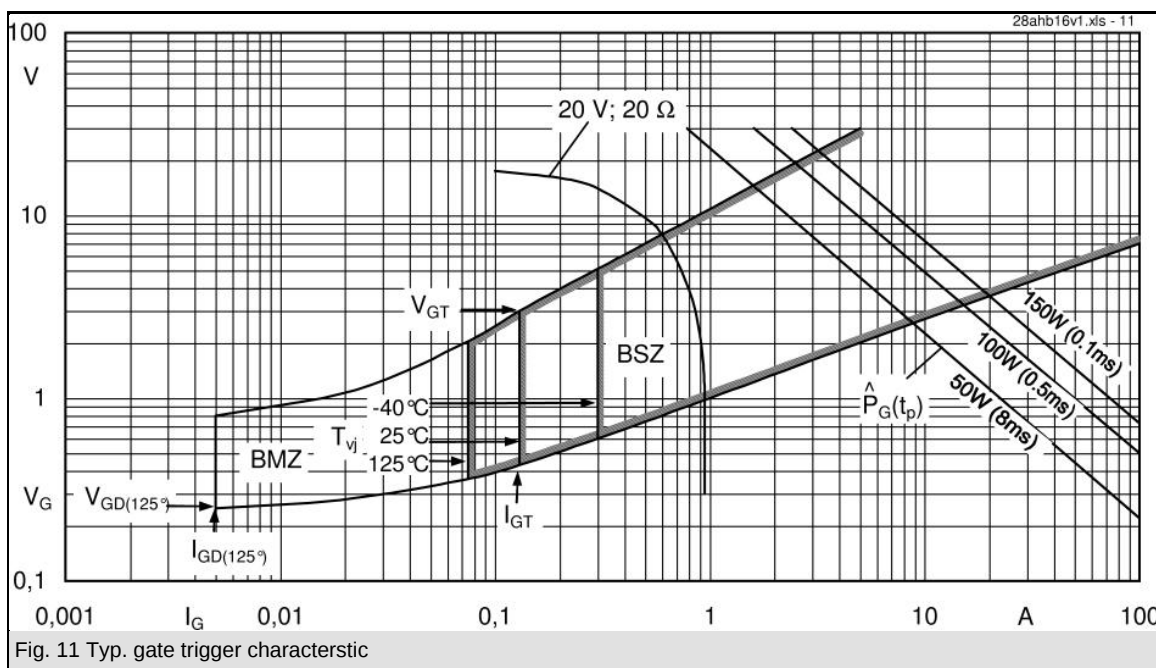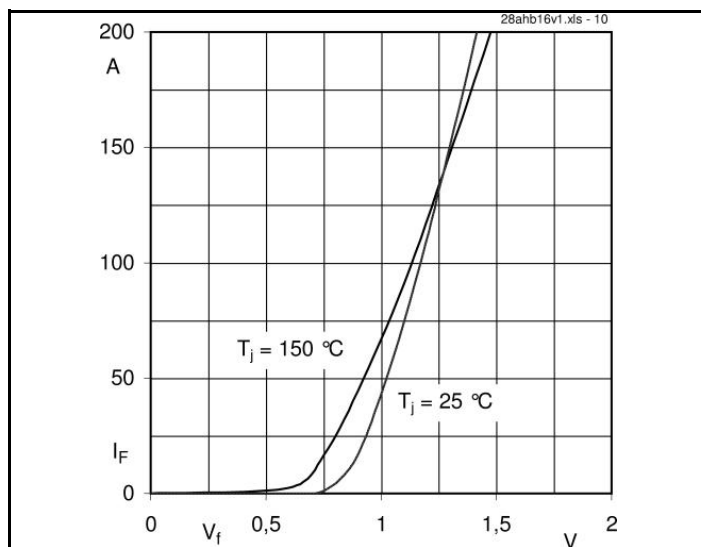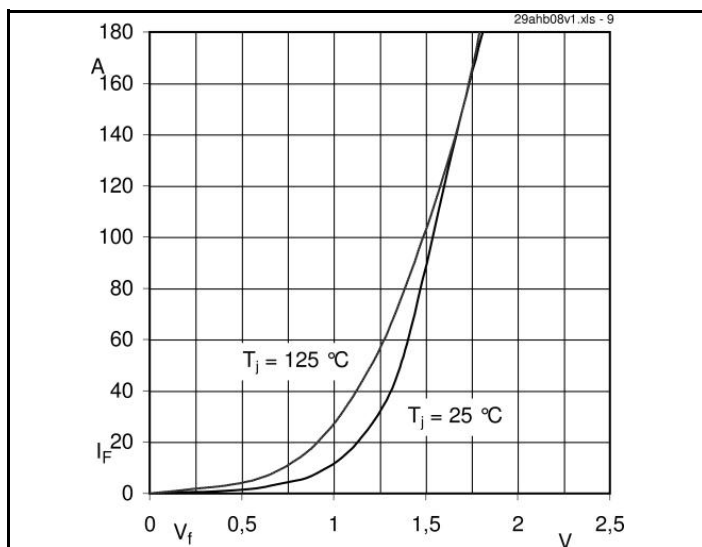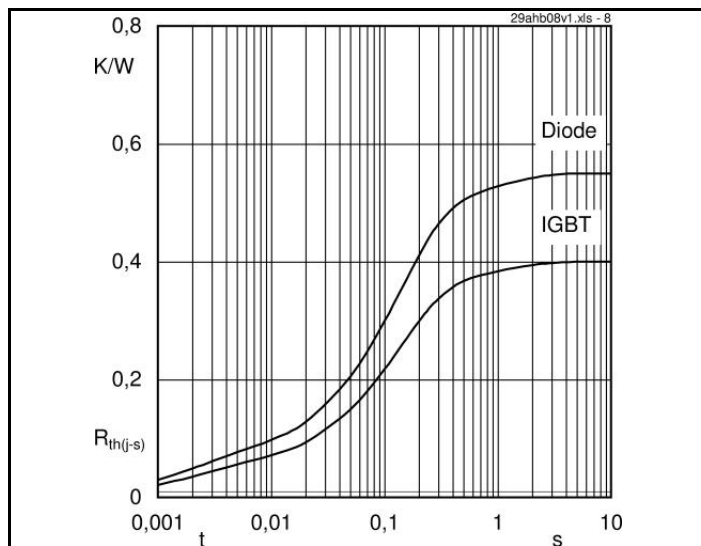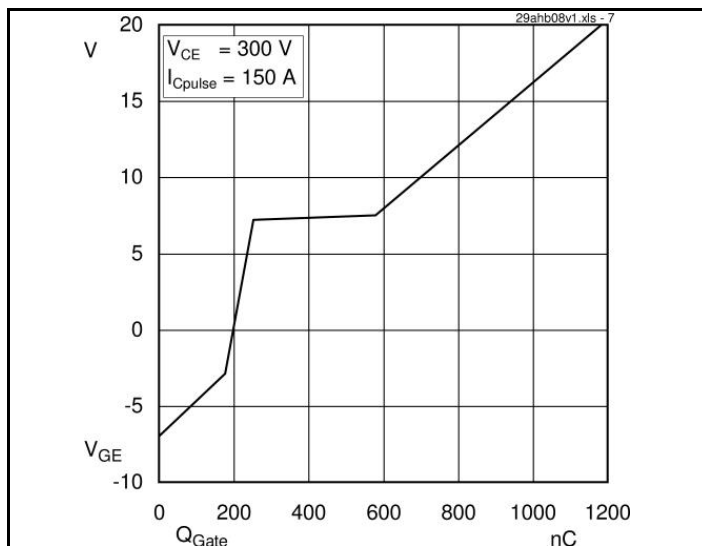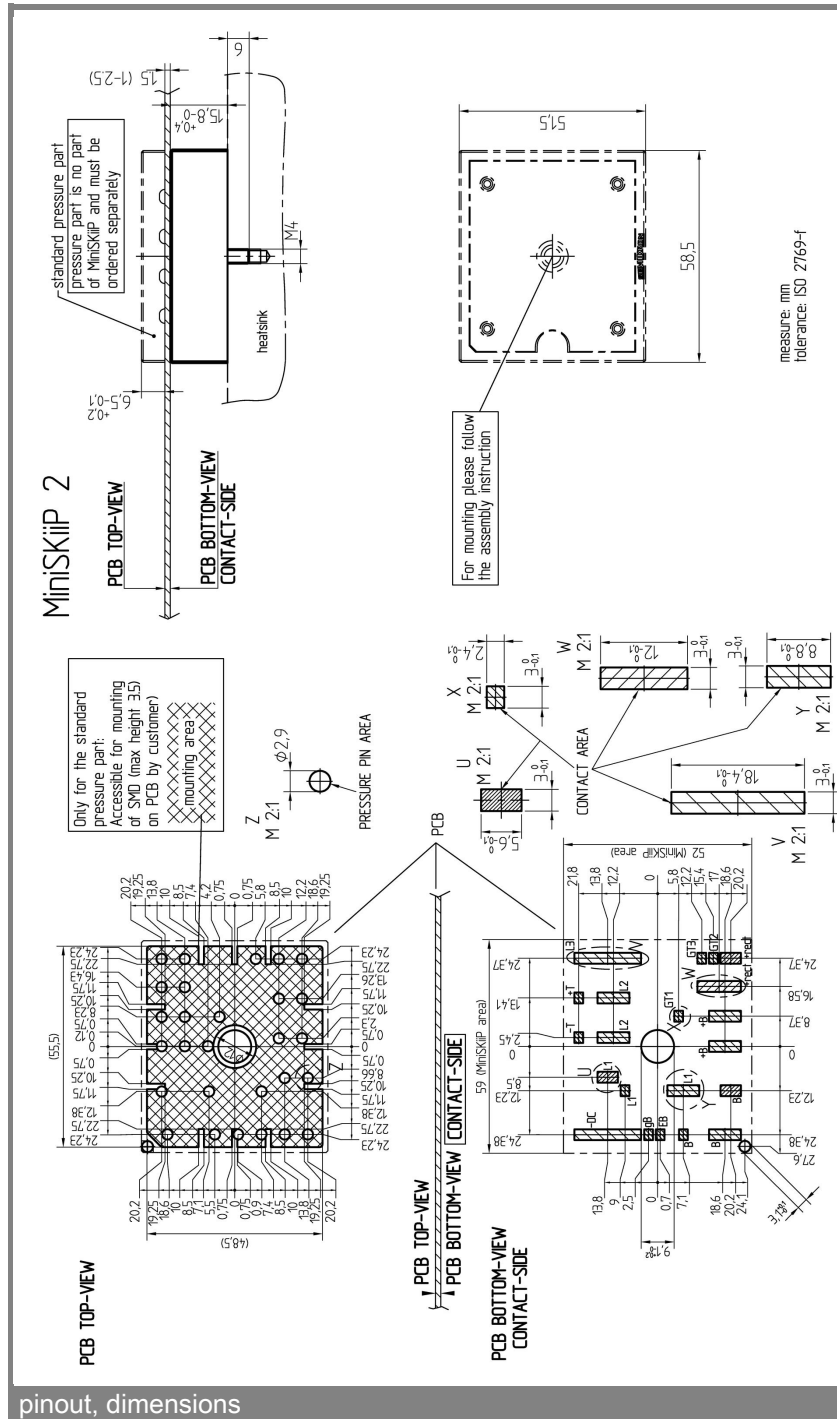

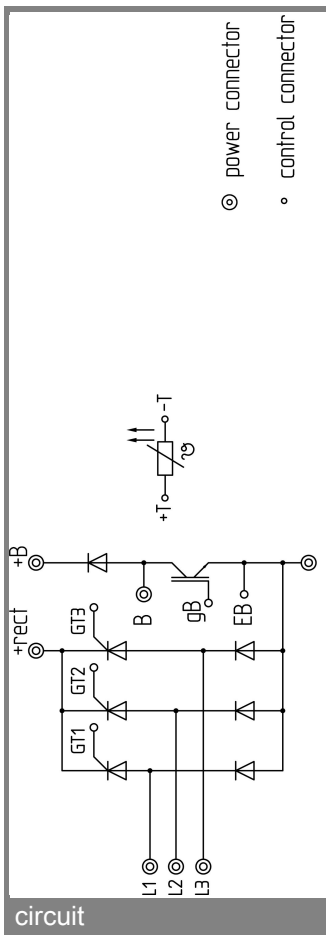

These documents are Semkron property. Semkron reserves all copyrights. All copying and transmitting of this information requires written permission. For the case of industrial property rights, Semkron reserves all rights.

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.