



Features:


- Small Size 5x3.2mm
- For cellular phones and GPS
- High accuracy



AVCTCQO 5032

Specifications		
	AVCTCQO 5032	Remarks
Frequency range	12MHz ~ 20MHz	Please specify
Nominal frequency	13.0 / 14.4 / 19.2 / 19.68 MHz	
Frequency tolerance	±0.5 ppm	
Frequency vs temperature	±2.5 ppm (-30°C ~ +75°C)	
Frequency vs aging	±1.0 ppm / year (25°C)	
Frequency vs supply voltage	±0.2 ppm / (+3.0V ±5%)	
External control voltage Vc =	+1.5V ±1.0Vdc	
Frequency tuning range	±8.0 ppm min (positive)	
Operating temperature	-30°C ~ +75°C	
Storage temperature	-40°C ~ +85°C	
Supply voltage	+2.7V ~ +5.0V	
Current Consumption	2mA	Max
Output load	10K Ohm / 10pF	
Output voltage	0.8Vp-p	Min
Waveform	Clipped Sine Wave	

Drawing

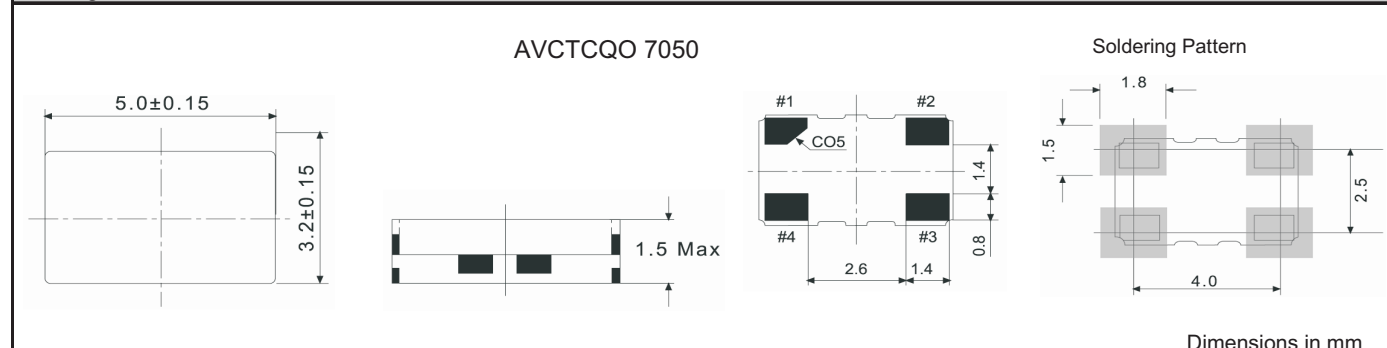

Order key

O	- 20.000000M	- AVCTCQO 5032	- 0,5	- 5.0	- E	- TR
Part	Frequency	Type/Package	Tolerance	Voltage	Temperature	Option
O=Oscillator	M=MHz	AVCTCQO=Voltage compensated, Temperature controlled QO 5032=5x3,2mm	±ppm	5,0=5,0Volt 2,7=2,7Volt 3,0=3,0Volt	D= -20°C ~ +70°C E= -40°C ~ +85°C K= -30°C ~ +75°C	TR=Tape and reeled
					S= special	X=Special options