

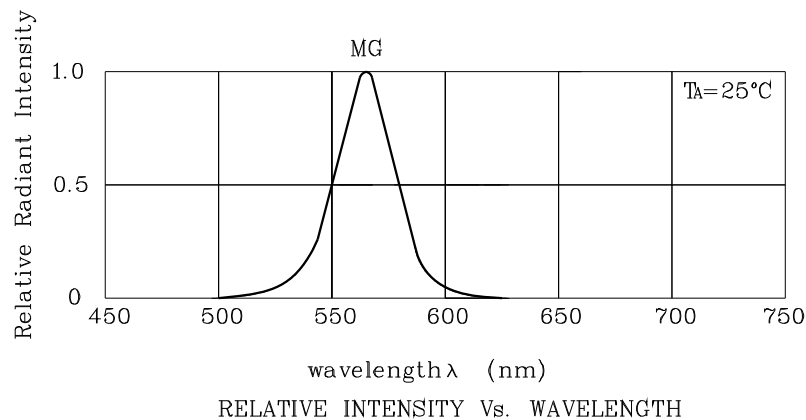
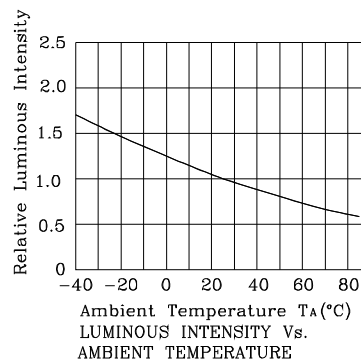



Part Number	Emitting Color	Emitting Material	Luminous Intensity (IF=10mA) ucd		Wavelength nm λ P	Description
			min.	typ.		
ZFMG10C	Green	GaP	1900	6990	565	Common Cathode, Rt. Hand Decimal
Published Date : FEB 29, 2008		Drawing No : SDSA5350		V2	Checked : Shin Chi	P.1/4



❖ MG




Remarks:

If special sorting is required (e.g. binning based on forward voltage, luminous intensity / luminous flux or wavelength), the typical accuracy of the sorting process is as follows:


1. Wavelength: $\pm 1\text{nm}$
2. Luminous Intensity / Luminous Flux: $\pm 15\%$
3. Forward Voltage: $\pm 0.1\text{V}$

Note: Accuracy may depend on the sorting parameters.

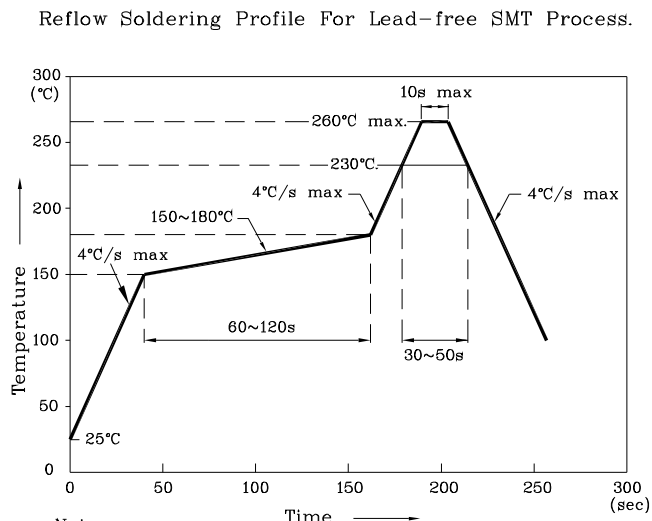


- Notes:
- 1.Maximum soldering temperature should not exceed 260°C.
 - 2.Recommended reflow temperature: 145°C~260°C.
 - 3.Do not put stress to the epoxy resin during high temperatures conditions.

❖ **Recommended Soldering Pattern (Units : mm;Tolerance:± 0.15)**

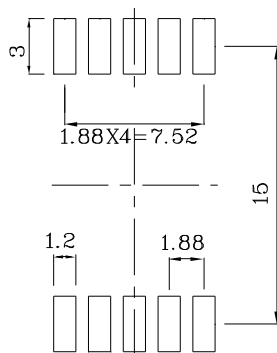


❖ Tape Specification (Units : mm)

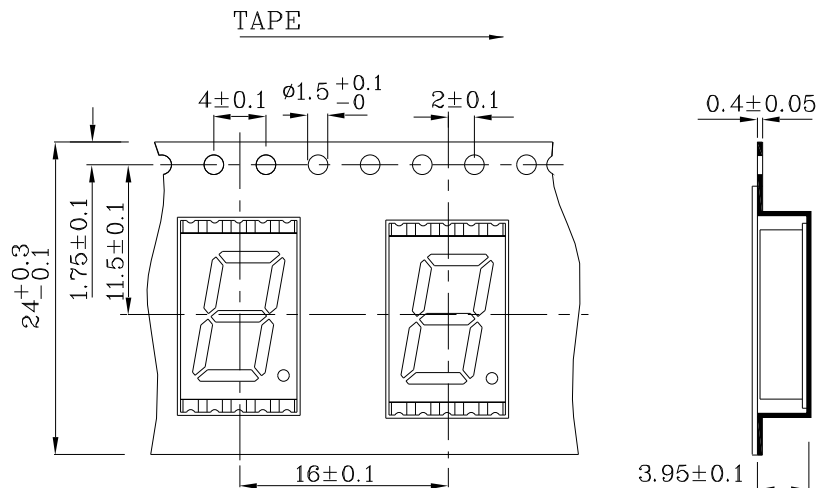


PACKING & LABEL SPECIFICATIONS

ZFMG10C

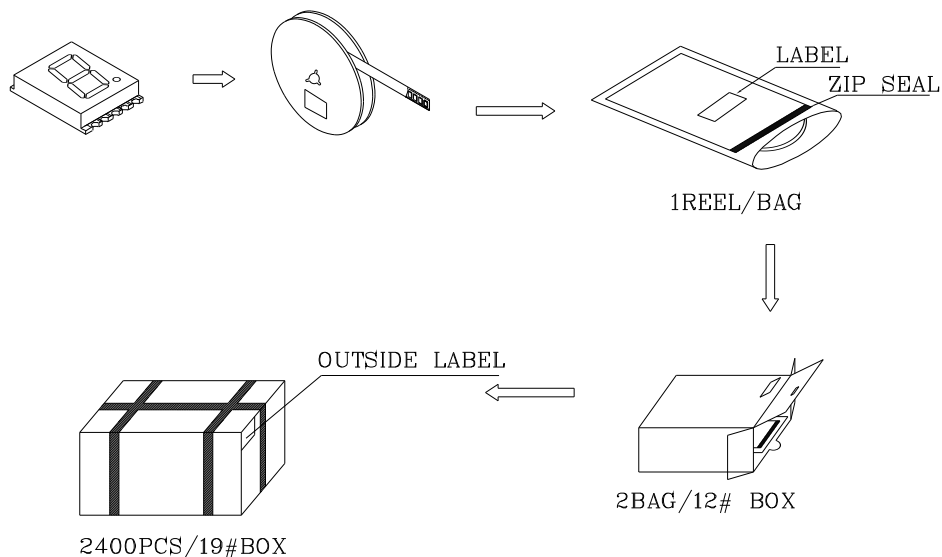

Outside LABEL Paste On The BAG

Inside LABEL Paste On The TAPE

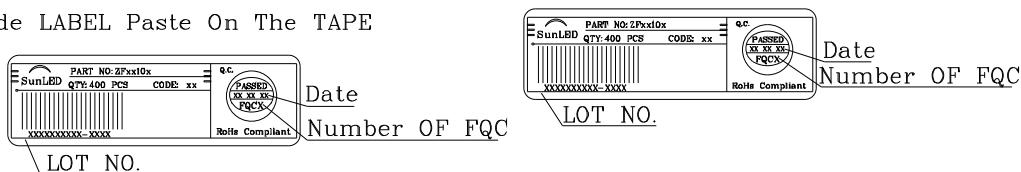

Outside LABEL Paste On The 19#Box

Outside LABEL Paste On The 12#Box

