

2-Mbit (128K x 16) Static RAM

Features


- **Temperature Ranges**
 - Industrial: -40°C to 85°C
 - Automotive-A: -40°C to 85°C
 - Automotive-E: -40°C to 125°C
- **High Speed: 55 ns**
- **Wide voltage range: 2.7V–3.6V**
- **Ultra-low active, standby power**
- **Easy memory expansion with $\overline{CE}$ and $\overline{OE}$ features**
- **TTL-compatible inputs and outputs**
- **Automatic power-down when deselected**
- **CMOS for optimum speed/power**
- **Available in Pb-free 44-pin TSOP Type II package**

Functional Description^[1]

The CY62137VN is a high-performance CMOS static RAM organized as 128K words by 16 bits. This device features advanced circuit design to provide ultra-low active current. This is ideal for providing More Battery Life™ (MoBL®) in

portable applications such as cellular telephones. The device also has an automatic power-down feature that reduces power consumption by 99% when addresses are not toggling. The device can also be put into standby mode when deselected ($\overline{CE}$ HIGH) or when $\overline{CE}$ is LOW and both $\overline{BLE}$ and $\overline{BHE}$ are HIGH. The input/output pins (I/O_0 through I/O_{15}) are placed in a high-impedance state when: deselected ($\overline{CE}$ HIGH), outputs are disabled ($\overline{OE}$ HIGH), $\overline{BHE}$ and $\overline{BLE}$ are disabled ($\overline{BHE}$, $\overline{BLE}$ HIGH), or during a write operation ($\overline{CE}$ LOW, and $\overline{WE}$ LOW). Writing to the device is accomplished by taking Chip Enable ($\overline{CE}$) and Write Enable ($\overline{WE}$) inputs LOW. If Byte Low Enable ($\overline{BLE}$) is LOW, then data from I/O pins (I/O_0 through I/O_7), is written into the location specified on the address pins (A_0 through A_{16}). If Byte High Enable ($\overline{BHE}$) is LOW, then data from I/O pins (I/O_8 through I/O_{15}) is written into the location specified on the address pins (A_0 through A_{16}). Reading from the device is accomplished by taking Chip Enable ($\overline{CE}$) and Output Enable ($\overline{OE}$) LOW while forcing the Write Enable ($\overline{WE}$) HIGH. If Byte Low Enable ($\overline{BLE}$) is LOW, then data from the memory location specified by the address pins will appear on I/O_0 to I/O_7 . If Byte High Enable ($\overline{BHE}$) is LOW, then data from memory will appear on I/O_8 to I/O_{15} . See the truth table at the back of this data sheet for a complete description of read and write modes.

Logic Block Diagram

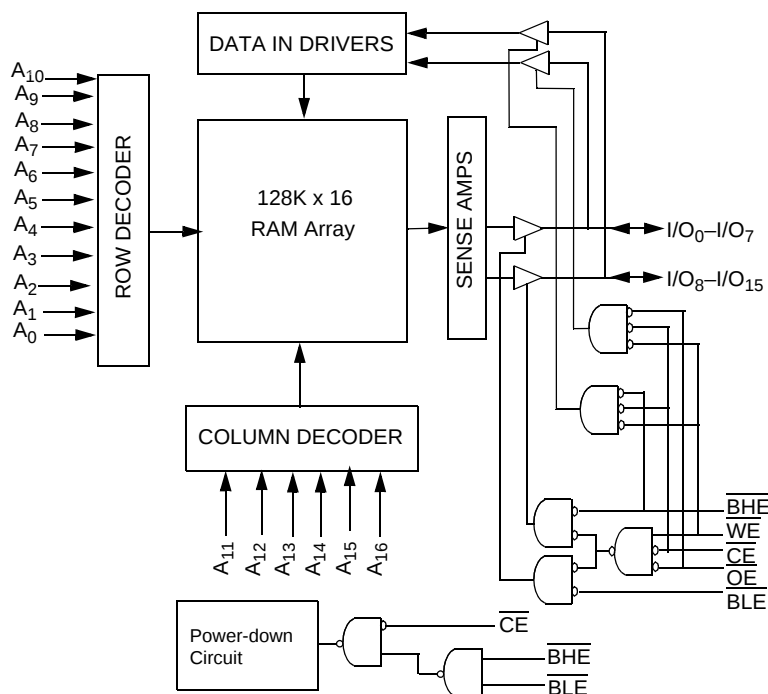

Note:

1. For best practice recommendations, please refer to the Cypress application note "System Design Guidelines" on <http://www.cypress.com>.

Product Portfolio

Product		V _{CC} Range (V)			Speed (ns)	Power Dissipation			
						Operating, I _{CC} (mA)		Standby, I _{SB2} (μA)	
		Min.	Typ. ^[3]	Max.		Typ. ^[3]	Max.	Typ. ^[3]	Max.
CY62137VNLL	Industrial	2.7	3.0	3.6	55	7	20	1	15
CY62137VNLL					70	7	15	1	15
CY62137VNLL	Automotive-A				70	7	15	1	15
CY62137VNLL	Automotive-E				70	7	15	1	20

Pin Configurations

TSOP II (Forward)
Top View

A ₄	1	44	A ₅
A ₃	2	43	A ₆
A ₂	3	42	A ₇
A ₁	4	41	OE
A ₀	5	40	BHE
CE	6	39	BLE
I/O ₀	7	38	I/O ₁₅
I/O ₁	8	37	I/O ₁₄
I/O ₂	9	36	I/O ₁₃
I/O ₃	10	35	I/O ₁₂
V _{CC}	11	34	V _{SS}
V _{SS}	12	33	V _{CC}
I/O ₄	13	32	I/O ₁₁
I/O ₅	14	31	I/O ₁₀
I/O ₆	15	30	I/O ₉
I/O ₇	16	29	I/O ₈
WE	17	28	NC
A ₁₆	18	27	A ₈
A ₁₅	19	26	A ₉
A ₁₄	20	25	A ₁₀
A ₁₃	21	24	A ₁₁
A ₁₂	22	23	NC

Pin Definitions

Pin Number	Type	Description
1–5, 18–22, 24–27, 42–45	Input	A ₀ –A ₁₆ . Address Inputs
7–10, 13–16, 29–32, 35–38	Input/Output	I/O ₀ –I/O ₁₅ . Data lines. Used as input or output lines depending on operation
23	No Connect	NC. This pin is not connected to the die
17	Input/Control	WE. When selected LOW, a WRITE is conducted. When selected HIGH, a READ is conducted
6	Input/Control	CE. When LOW, selects the chip. When HIGH, deselects the chip
40, 39	Input/Control	Byte Write Select Inputs, active LOW. BHE controls I/O ₁₅ –I/O ₈ , BLE controls I/O ₇ –I/O ₀ .
41	Input/Control	OE. Output Enable. Controls the direction of the I/O pins. When LOW, the I/O pins behave as outputs. When deasserted HIGH, I/O pins are tri-stated, and act as input data pins
12, 34	Ground	V _{SS} . Ground for the device
11, 33	Power Supply	V _{CC} . Power supply for the device

Notes:

- NC pins are not connected on the die.
- Typical values are included for reference only and are not guaranteed or tested. Typical values are measured at V_{CC} = V_{CC(TYP)}, T_A = 25°C.

Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature -65°C to +150°C

Ambient Temperature with

Power Applied -55°C to +125°C

Supply Voltage to Ground Potential -0.5V to +4.6V

DC Voltage Applied to Outputs

in High-Z State^[4] -0.5V to $V_{CC} + 0.5V$

DC Input Voltage^[4] -0.5V to $V_{CC} + 0.5V$

Output Current into Outputs (LOW) 20 mA

Static Discharge Voltage > 2001V
(per MIL-STD-883, Method 3015)

Latch-up Current > 200 mA

Operating Range

Range	Ambient Temperature	V_{CC}
Industrial	-40°C to +85°C	2.7V to 3.6V
Automotive-A	-40°C to +85°C	
Automotive-E	-40°C to +125°C	

Electrical Characteristics Over the Operating Range

Parameter	Description	Test Conditions	-55			-70			Unit
			Min.	Typ. ^[3]	Max.	Min.	Typ. ^[3]	Max.	
V_{OH}	Output HIGH Voltage	$V_{CC} = 2.7V$, $I_{OH} = -1.0$ mA	2.4			2.4			V
V_{OL}	Output LOW Voltage	$V_{CC} = 2.7V$, $I_{OL} = 2.1$ mA			0.4			0.4	V
V_{IH}	Input HIGH Voltage		2.2		$V_{CC} + 0.5V$	2.2		$V_{CC} + 0.5V$	V
V_{IL}	Input LOW Voltage		-0.5		0.8	-0.5		0.8	V
I_{IX}	Input Leakage Current	$GND \leq V_I \leq V_{CC}$	-1		+1	-1		+1	μA
I_{OZ}	Output Leakage Current	$GND \leq V_O \leq V_{CC}$, Output Disabled	-1		+1	-1		+1	μA
I_{CC}	V_{CC} Operating Supply Current	$I_{OUT} = 0$ mA, $f = f_{MAX} = 1/t_{RC}$, CMOS Levels	$V_{CC} = 3.6V$	Ind'l	7	20	7	15	mA
				Auto-A/ Auto-E			7	15	
		$I_{OUT} = 0$ mA, $f = 1$ MHz, CMOS Levels	$V_{CC} = 3.6V$	Ind'l	1	2	1	2	mA
				Auto-A/ Auto-E			1	2	
I_{SB1}	Automatic CE Power-down Current—CMOS Inputs	$\overline{CE} \geq V_{CC} - 0.3V$, $V_{IN} \geq V_{CC} - 0.3V$ or $V_{IN} \leq 0.3V$, $f = f_{MAX}$	$V_{CC} = 3.6V$	Ind'l		100		100	μA
				Auto-A/ Auto-E				100	
I_{SB2}	Automatic CE Power-down Current—CMOS Inputs	$\overline{CE} \geq V_{CC} - 0.3V$, $V_{IN} \geq V_{CC} - 0.3V$ or $V_{IN} \leq 0.3V$, $f = 0$	$V_{CC} = 3.6V$	Ind'l	1	15	1	15	μA
				Auto-A			1	15	
				Auto-E			1	20	

Capacitance^[5]

Parameter	Description	Test Conditions	Max.	Unit
C_{IN}	Input Capacitance	$T_A = 25^\circ C$, $f = 1$ MHz, $V_{CC} = V_{CC(typ)}$	6	pF
C_{OUT}	Output Capacitance		8	pF

Thermal Resistance^[5]


Parameter	Description	Test Conditions	TSOPII	Unit
Θ_{JA}	Thermal Resistance (Junction to Ambient)	Still Air, soldered on a 4.25 x 1.125 inch, 2-layer printed circuit board	60	°C/W
Θ_{JC}	Thermal Resistance (Junction to Case)		22	°C/W

Notes:


4. $V_{IL(min.)} = -2.0V$ for pulse durations less than 20 ns.

5. Tested initially and after any design or process changes that may affect these parameters.

AC Test Loads and Waveforms

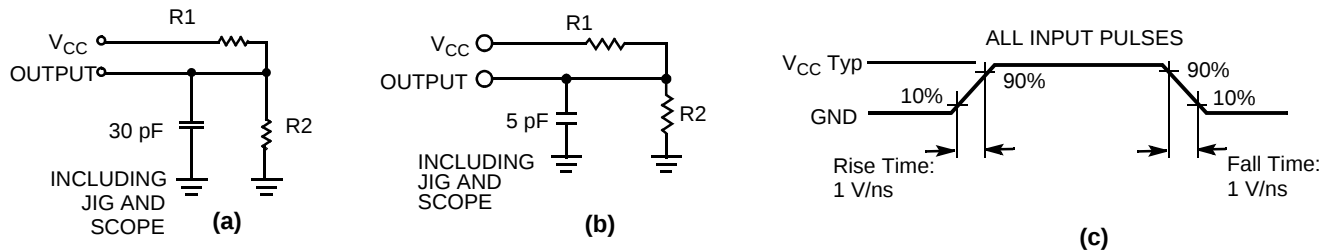

Equivalent to: THÉVENIN EQUIVALENT




Parameters	Value	Unit
R1	1105	Ohms
R2	1550	Ohms
R_{TH}	645	Ohms
V_{TH}	1.75	Volts

Data Retention Characteristics (Over the Operating Range)

Parameter	Description	Conditions	Min.	Typ. ^[3]	Max.	Unit
V_{DR}	V_{CC} for Data Retention		1.0			V
I_{CCDR}	Data Retention Current	$V_{CC} = 1.0V$, $\overline{CE} \geq V_{CC} - 0.3V$, $V_{IN} \geq V_{CC} - 0.3V$ or $V_{IN} \leq 0.3V$; No input may exceed $V_{CC} + 0.3V$		0.5	7.5	μA
		Ind'I/Auto-A			10	
$t_{CDR}^{[5]}$	Chip Deselect to Data Retention Time		0			ns
t_R	Operation Recovery Time		t_{RC}			ns

Data Retention Waveform

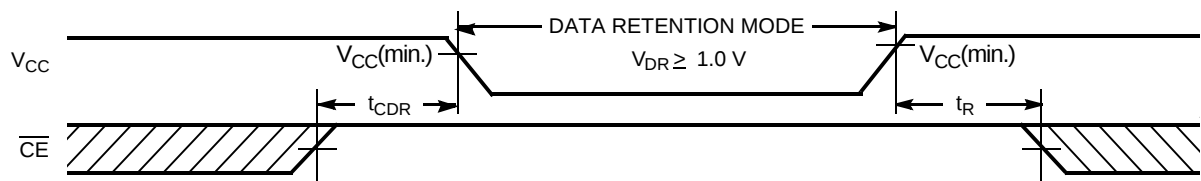

Switching Characteristics Over the Operating Range ^[6]


Parameter	Description	55 ns		70 ns		Unit
		Min.	Max.	Min.	Max.	
Read Cycle						
t _{RC}	Read Cycle Time	55		70		ns
t _{AA}	Address to Data Valid		55		70	ns
t _{OHA}	Data Hold from Address Change	10		10		ns
t _{ACE}	$\overline{\text{CE}}$ LOW to Data Valid		55		70	ns
t _{DOE}	$\overline{\text{OE}}$ LOW to Data Valid		25		35	ns
t _{LZOE}	$\overline{\text{OE}}$ LOW to Low-Z ^[7]	5		5		ns
t _{HZOE}	$\overline{\text{OE}}$ HIGH to High-Z ^[7, 8]		25		25	ns
t _{LZCE}	$\overline{\text{CE}}$ LOW to Low-Z ^[7]	10		10		ns
t _{HZCE}	$\overline{\text{CE}}$ HIGH to High-Z ^[7, 8]		25		25	ns
t _{PU}	$\overline{\text{CE}}$ LOW to Power-up	0		0		ns
t _{PD}	$\overline{\text{CE}}$ HIGH to Power-down		55		70	ns
t _{DBE}	$\overline{\text{BHE}}$ / $\overline{\text{BLE}}$ LOW to Data Valid		55		70	ns
t _{LZBE} ⁽⁹⁾	$\overline{\text{BHE}}$ / $\overline{\text{BLE}}$ LOW to Low-Z	5		5		ns
t _{HZBE}	$\overline{\text{BHE}}$ / $\overline{\text{BLE}}$ HIGH to High-Z		25		25	ns
Write Cycle ^[10, 11]						
t _{WC}	Write Cycle Time	55		70		ns
t _{SCE}	$\overline{\text{CE}}$ LOW to Write End	45		60		ns
t _{AW}	Address Set-up to Write End	45		60		ns
t _{HA}	Address Hold from Write End	0		0		ns
t _{SA}	Address Set-up to Write Start	0		0		ns
t _{PWE}	$\overline{\text{WE}}$ Pulse Width	40		50		ns
t _{SD}	Data Set-up to Write End	25		30		ns
t _{HD}	Data Hold from Write End	0		0		ns
t _{HZWE}	$\overline{\text{WE}}$ LOW to High-Z ^[7, 8]		20		25	ns
t _{LZWE}	$\overline{\text{WE}}$ HIGH to Low-Z ^[7]	5		10		ns
t _{BW}	$\overline{\text{BHE}}$ / $\overline{\text{BLE}}$ LOW to End of Write	50		60		ns

Notes:


6. Test conditions assume signal transition time of 5 ns or less, timing reference levels of 1.5V, input levels of 0 to V_{CC} typ., and output loading of the specified I_{OL}/I_{OH} and 30 pF load capacitance.
7. At any given temperature and voltage condition, t_{HZCE} is less than t_{LZCE}, t_{HZOE} is less than t_{LZOE}, and t_{HZWE} is less than t_{LZWE} for any given device.
8. t_{HZOE}, t_{HZCE}, and t_{HZWE} are specified with C_L = 5 pF as in (b) of AC Test Loads. Transition is measured ±500 mV from steady-state voltage.
9. If both byte enables are toggled together this value is 10 ns.
10. The internal write time of the memory is defined by the overlap of $\overline{\text{CE}}$ LOW and $\overline{\text{WE}}$ LOW. Both signals must be LOW to initiate a write and either signal can terminate a write by going HIGH. The data input set-up and hold timing should be referenced to the rising edge of the signal that terminates the write.
11. The minimum write cycle time for write cycle #3 (WE controlled, OE LOW) is the sum of t_{HZWE} and t_{SD}.

Switching Waveforms

Read Cycle No. 1^[12, 13]

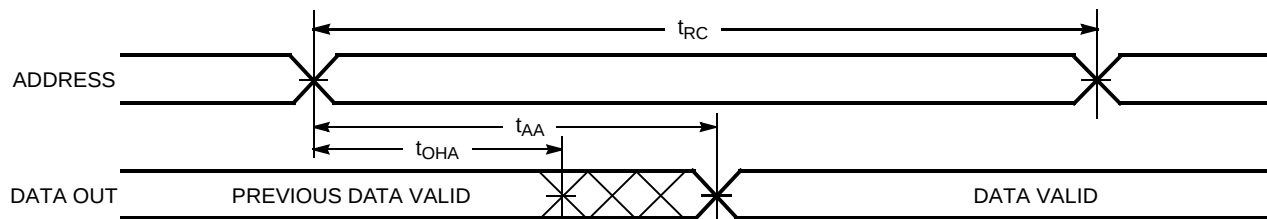

Read Cycle No. 2^[13, 14]

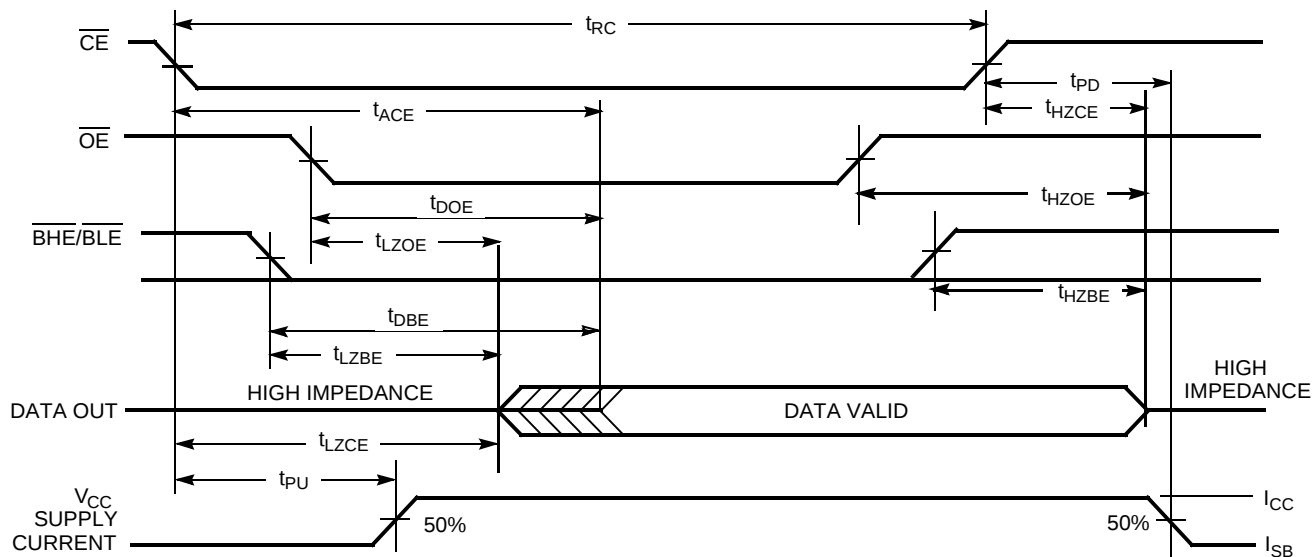


Notes:


12. Device is continuously selected. $\overline{OE}$, $\overline{CE} = V_{IL}$.
13. $\overline{WE}$ is HIGH for read cycle.
14. Address valid prior to or coincident with $\overline{CE}$ transition LOW.

Switching Waveforms (continued)

Write Cycle No. 1 ($\overline{\text{WE}}$ Controlled)^[10, 15, 16]

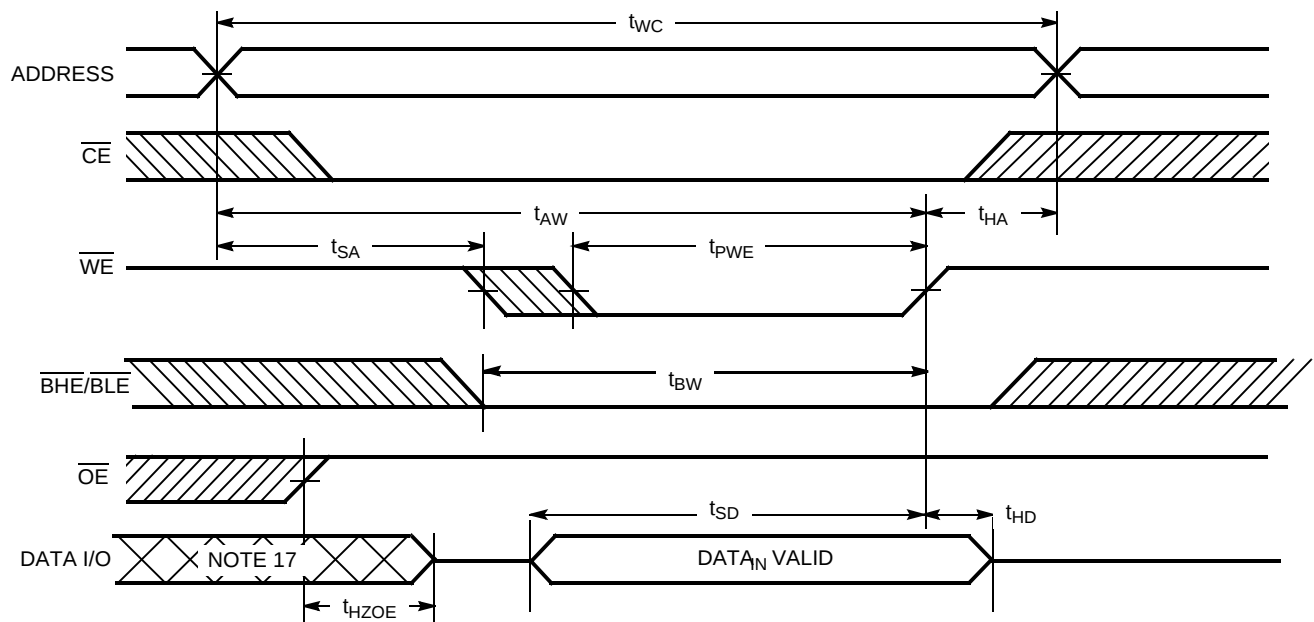

Write Cycle No. 2 ($\overline{\text{CE}}$ Controlled)^[10, 15, 16]

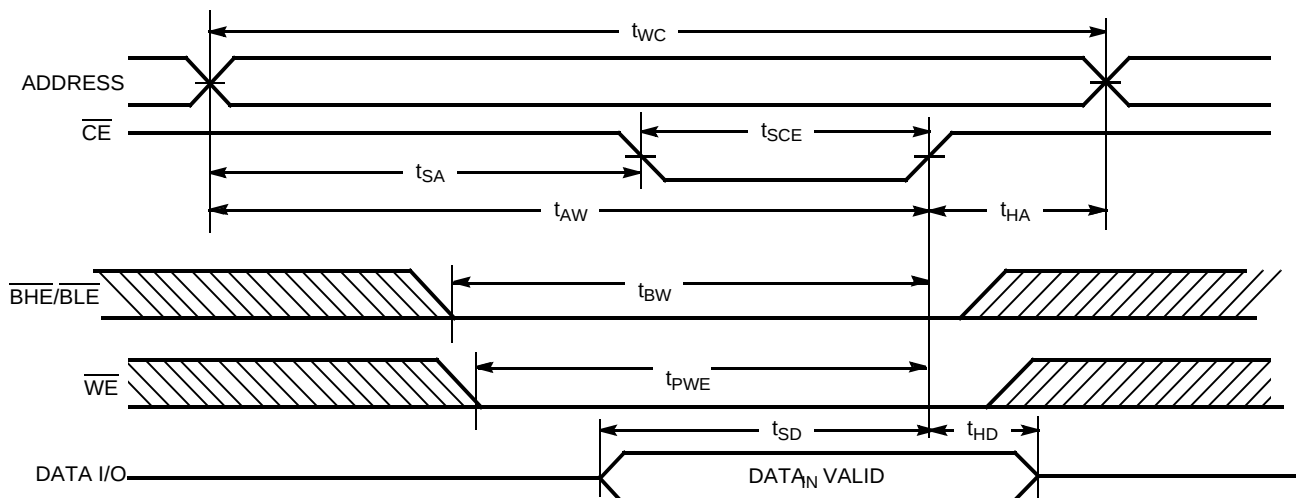


Notes:


15. Data I/O is high-impedance if $\overline{\text{OE}} = V_{\text{IH}}$.
16. If $\overline{\text{CE}}$ goes HIGH simultaneously with $\overline{\text{WE}}$ HIGH, the output remains in a high-impedance state.
17. During this period, the I/Os are in output state and input signals should not be applied.

Switching Waveforms (continued)




Write Cycle No. 3 ($\overline{\text{WE}}$ Controlled, $\overline{\text{OE}}$ LOW)^[11, 16]

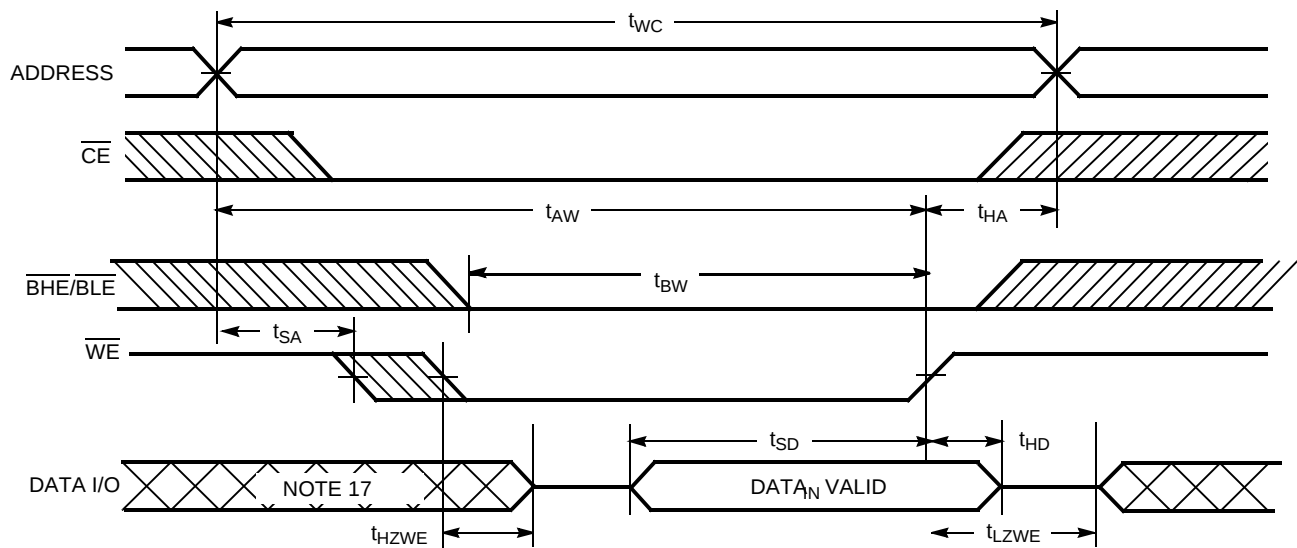

Write Cycle No. 4 ($\overline{\text{BHE/BLE}}$ Controlled, $\overline{\text{OE}}$ LOW)^[17]

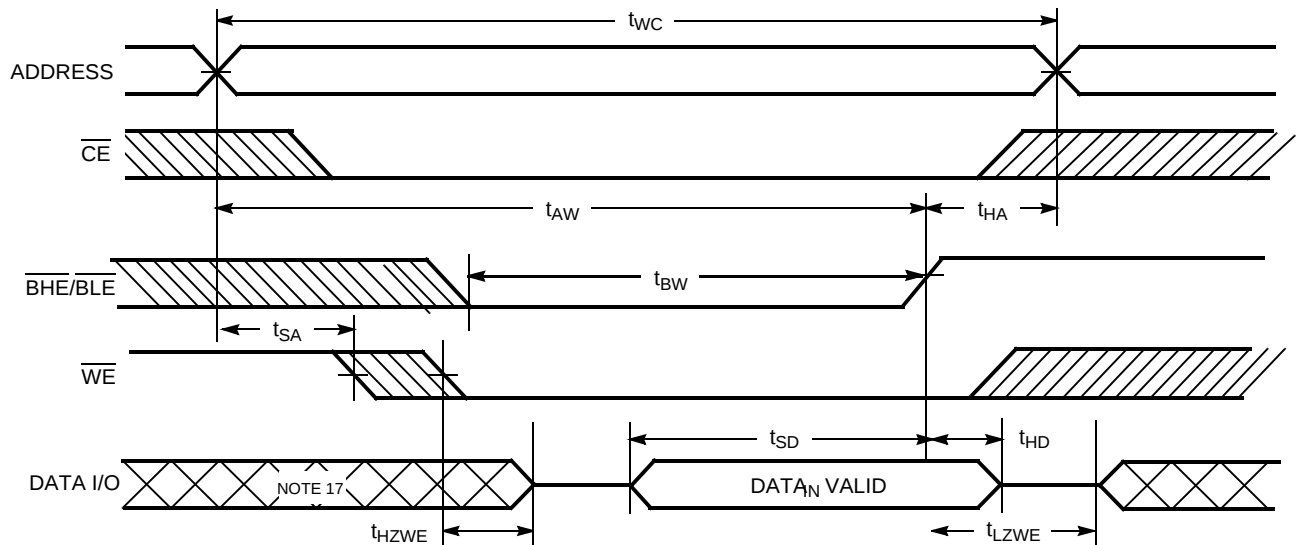

Typical DC and AC Characteristics

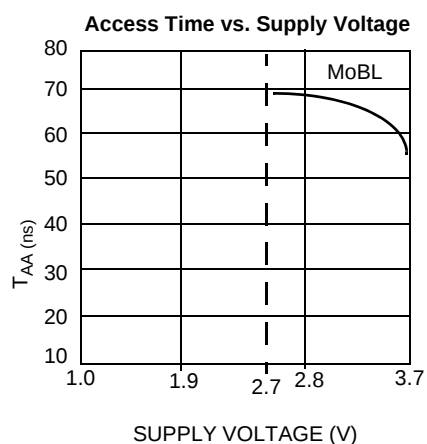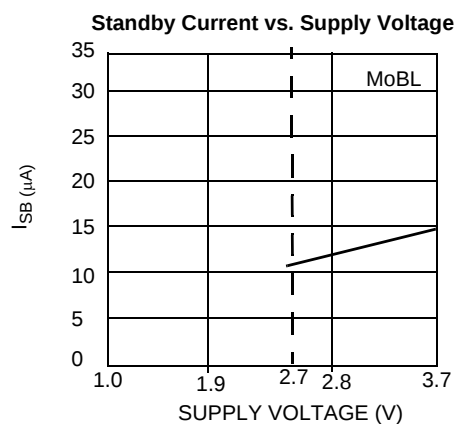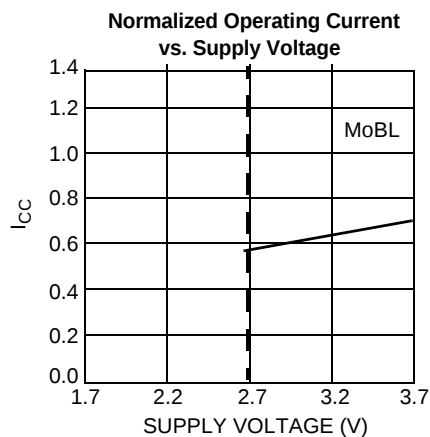

Truth Table

$\overline{CE}$	$\overline{WE}$	$\overline{OE}$	$\overline{BHE}$	$\overline{BLE}$	I/O ₈ –I/O ₁₅	I/O ₀ –I/O ₇	Mode	Power
H	X	X	X	X	High-Z	High-Z	Deselect/Power-down	Standby (I_{SB})
X	X	X	H	H	High-Z	High-Z	Deselect/Power-down	Standby (I_{SB})
L	H	L	L	L	Data Out	Data Out	Read	Active (I_{CC})
L	H	L	H	L	High-Z	Data Out	Read	Active (I_{CC})
L	H	L	L	H	Data Out	High-Z	Read	Active (I_{CC})
L	H	H	X	X	High-Z	High-Z	Output Disabled	Active (I_{CC})
L	L	X	L	L	Data In	Data In	Write	Active (I_{CC})
L	L	X	H	L	High-Z	Data In	Write	Active (I_{CC})
L	L	X	L	H	Data In	High-Z	Write	Active (I_{CC})


Ordering Information

Speed (ns)	Ordering Code	Package Diagram	Package Type	Operating Range
55	CY62137VNLL-55ZXI	51-85087	44-pin TSOP II (Pb-free)	Industrial
70	CY62137VNLL-70ZXI		44-pin TSOP II (Pb-free)	Industrial
	CY62137VNLL-70ZSXA		44-pin TSOP II (Pb-free)	Automotive-A
	CY62137VNLL-70ZSXE		44-pin TSOP II (Pb-free)	Automotive-E


Please contact your local Cypress sales representative for availability of these parts

Package Diagram



44-Pin TSOP II (51-85087)

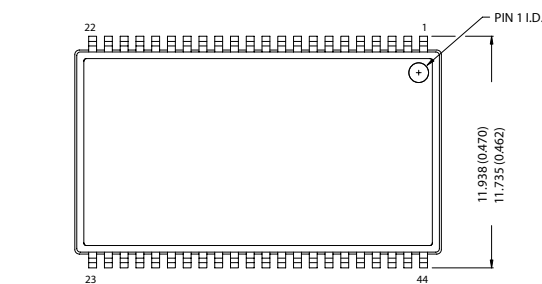

TOP VIEW

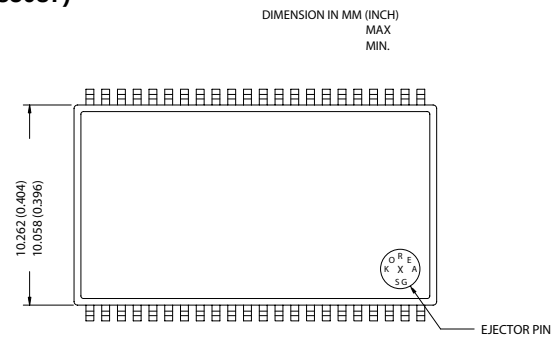

BOTTOM VIEW

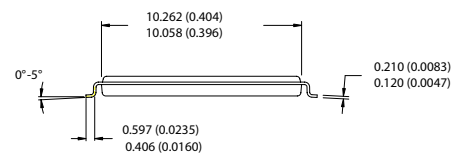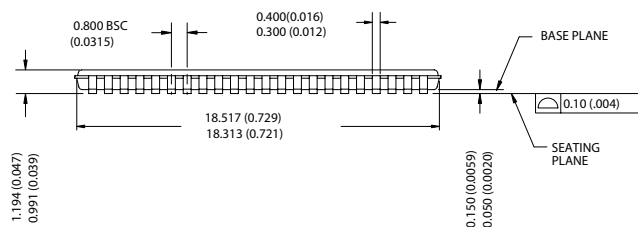

51-85087-*A

MoBL is a registered trademark, and More Battery Life is a trademark, of Cypress Semiconductor Corporation. All product and company names mentioned in this document are the trademarks of their respective holders.

Document History Page

Document Title: CY62137VN MoBL[®] 2-Mbit (128K x 16) Static RAM Document Number: 001-06497				
REV.	ECN NO.	Issue Date	Orig. of Change	Description of Change
**	426503	See ECN	NXR	New Data Sheet
*A	488954	See ECN	NXR	Added Automotive product Updated Ordering Information table