



ZTB/Y

Features:

- Low cost
- Consumer electronics
- Microprocessor systems
- Automatotive applications



Specifications					
		ZTB/Y			
Frequency range (kHz)		375 ~ 429	430 ~ 509	510 ~ 699	700 ~ 1250
Frequency accuracy (25°C)		+/-1kHz	+/-1kHz	+/-2kHz	+/-0.5%
Temp. stability (-20°C ~ +80°C)		+/-0.3%	+/-0.3%	+/-0.3%	+/-0.3%
Aging (over 10 years)		+/-0.3%	+/-0.3%	+/-0.3%	+/-0.3%
Capacitance (pF)	C1	120	100	100	100
	C2	470	470	100	100

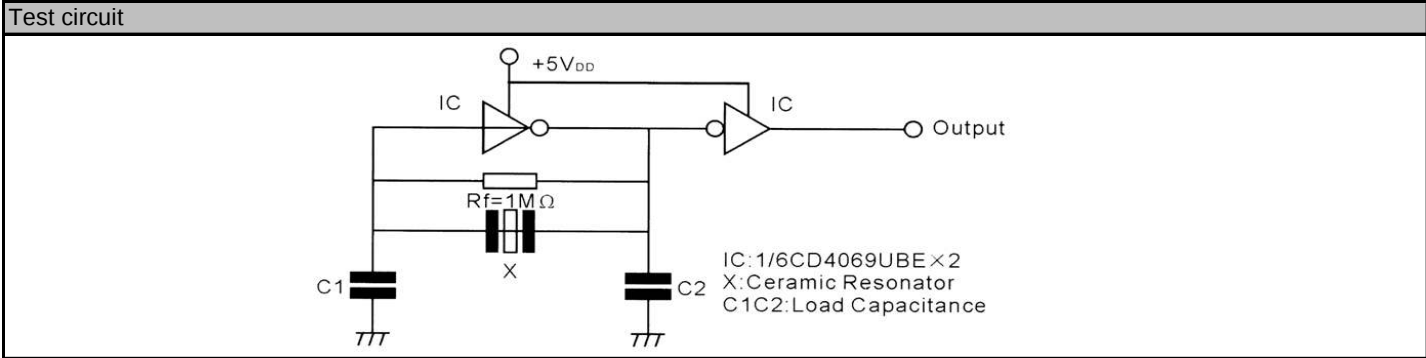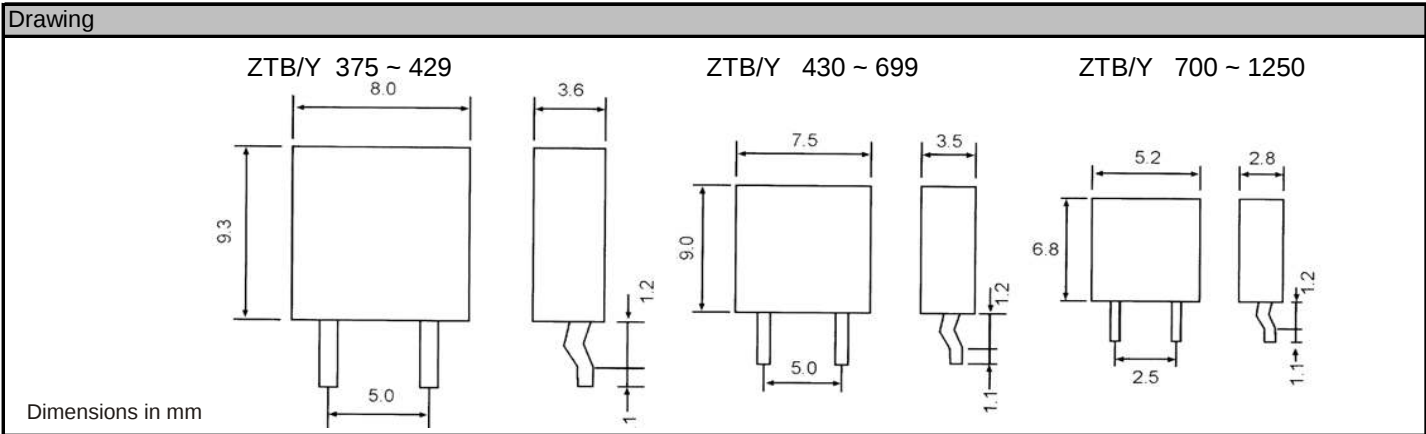

Order key						
R	- 450.00K	- ZTB/Y	- 2.0	- 0.3	- H	- 100/470
Part	Frequency	Type/Package	Frequency tolerance	Temperature tolerance	Temperature range	Load capacitance
R=Resonator	K=KHz M=MHz	ZTB/Y series	+/-KHz or % (25°C)	+/-% (Temp. range)	H=-20°C ~ +80°C	pF C1/C2

Remarks: All specifications subject to change without notice!