

International
IR Rectifier

72CPQ030PbF

SCHOTTKY RECTIFIER

70 Amp

$$I_{F(AV)} = 70\text{Amp}$$

$$V_R = 30\text{V}$$

Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	70	A
V_{RRM}	30	V
I_{FSM} @tp=5μs sine	2180	A
V_F @35Apk, $T_J=125^\circ\text{C}$ (per leg)	0.43	V
T_J range	-55 to 150	$^\circ\text{C}$

Description/ Features


The 72CPQ030PbF center tap Schottky rectifier series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150°C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150°C T_J operation
- Center tap TO-247 package
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free ("PbF" suffix)

Case Styles



TO-247AC



72CPQ030PbF

Bulletin PD-20799 rev. A 11/06

International
IR Rectifier

Voltage Ratings

Part number	72CPQ030PbF
V_R Max. DC Reverse Voltage (V)	30
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	72CPQ	Units	Conditions
$I_{F(AV)}$ Max. Average Forward (Per Leg) Current * See Fig. 5 (Per Device)	35 70	A	50% duty cycle @ $T_C = 125^\circ\text{C}$, rectangular wave form
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	2180 600	A	5 μs Sine or 3 μs Rect. pulse 10ms Sine or 6ms Rect. pulse Following any rated load condition and with rated V_{RRM} applied
E_{AS} Non-Repetitive Avalanche Energy (Per Leg)	27	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 6\text{ Amps}$, $L = 1.5\text{ mH}$
I_{AR} Repetitive Avalanche Current (Per Leg)	6	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	72CPQ	Units	Conditions
V_{FM} Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	0.51	V	@ 35A $T_J = 25^\circ\text{C}$
	0.61	V	@ 70A
	0.43	V	@ 35A $T_J = 125^\circ\text{C}$
	0.58	V	@ 70A
I_{RM} Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	1.9	mA	$T_J = 25^\circ\text{C}$
	450	mA	$T_J = 125^\circ\text{C}$ $V_R = \text{rated } V_R$
$V_{F(TO)}$ Threshold Voltage	0.25	V	$T_J = T_J \text{ max.}$
r_t Forward Slope Resistance	4.70	m Ω	
C_T Max. Junction Capacitance (Per Leg)	4600	pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) 25°C
L_S Typical Series Inductance (Per Leg)	7.5	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change	10000	V/ μs	(Rated V_R)

(1) Pulse Width < 300 μs , Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters			72CPQ	Units	Conditions	
T _J	Max. Junction Temperature Range		-55 to 150	°C		
T _{stg}	Max. Storage Temperature Range		-55 to 150	°C		
R _{thJC}	Max. Thermal Resistance Junction to Case (Per Leg) * See Fig. 4		0.8	°C/W	DC operation	
R _{thJC}	Max. Thermal Resistance Junction to Case (Per Package)		0.4	°C/W	DC operation	
R _{thCS}	Typical Thermal Resistance, Case to Heatsink		0.25	°C/W	Mounting surface , smooth and greased	
wt	Approximate Weight		6 (0.21)	g (oz.)		
T	Mounting Torque	Min.	6 (5)	Kg-cm (lbf-in)		
		Max.	12 (10)			
Case Style			TO-247AC(TO-3P)			JEDEC
Marking Information			72CPQ030			

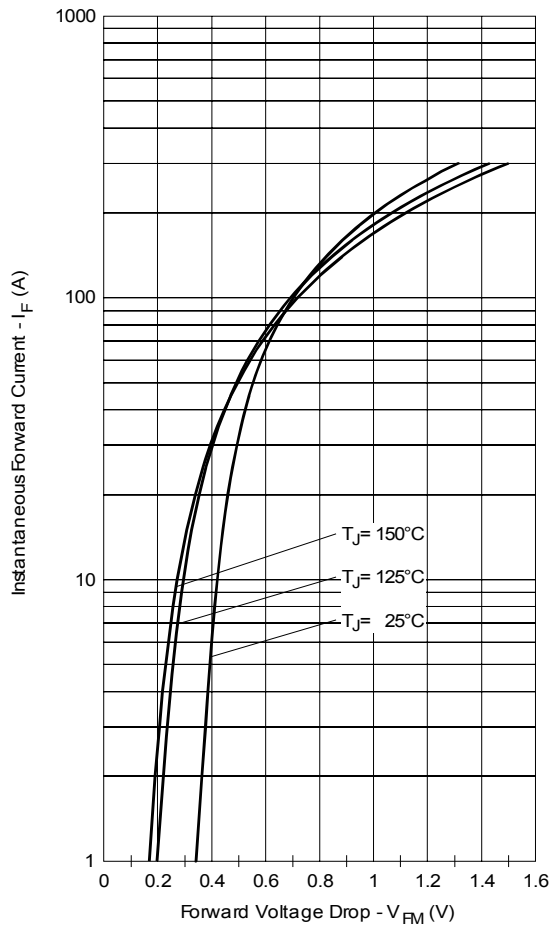


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

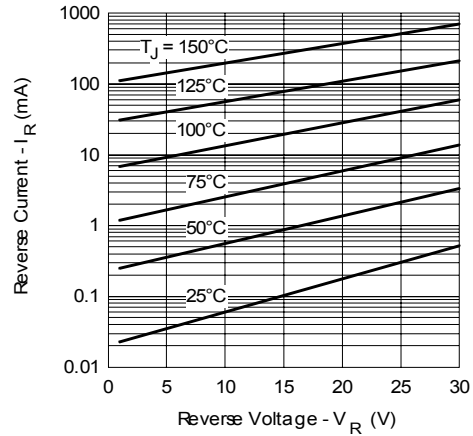


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

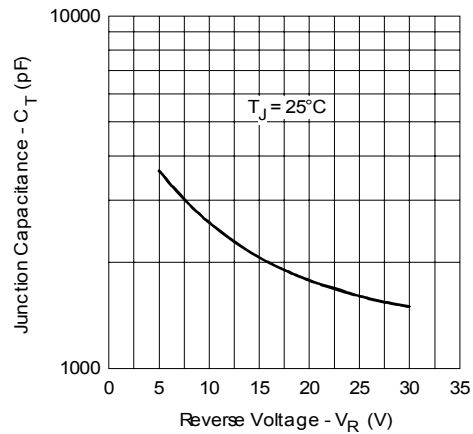


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

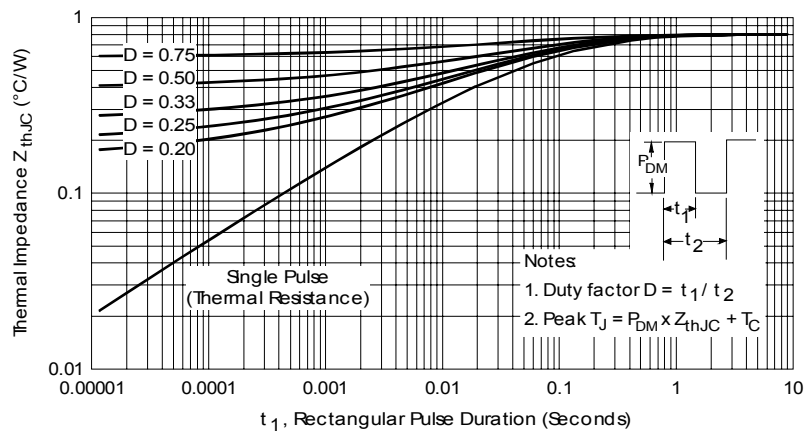


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

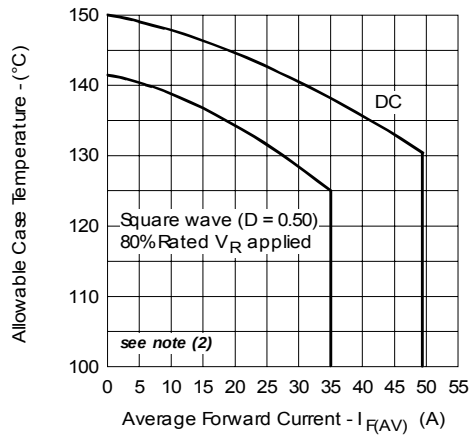


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

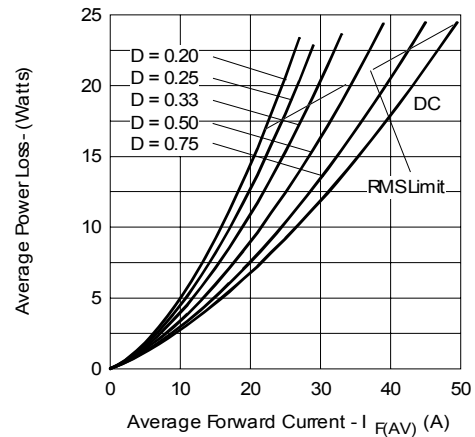


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

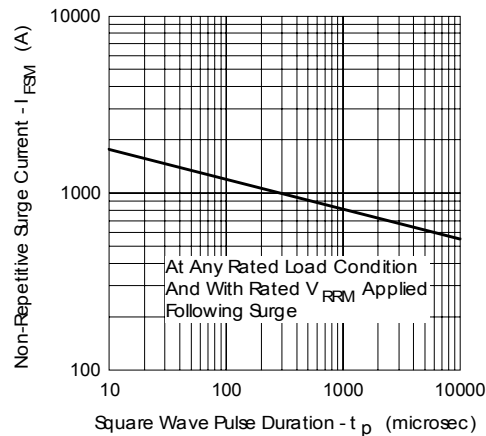


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

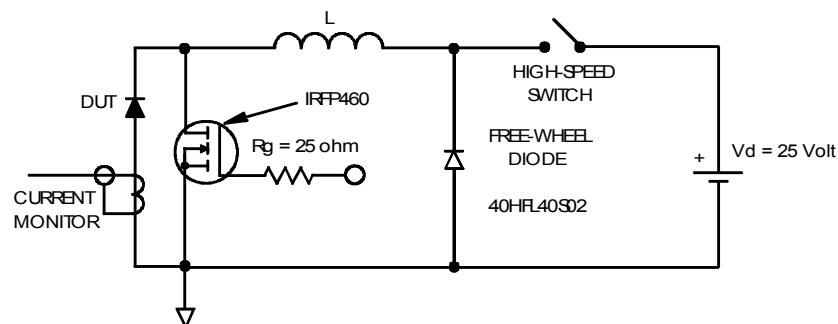



Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;

P_d = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);


$P_{d_{REV}}$ = Inverse Power Loss = $V_{R1} \times I_{R1} (1 - D)$; $I_{R1} @ V_{R1} = 80\%$ rated V_R

Outline Table

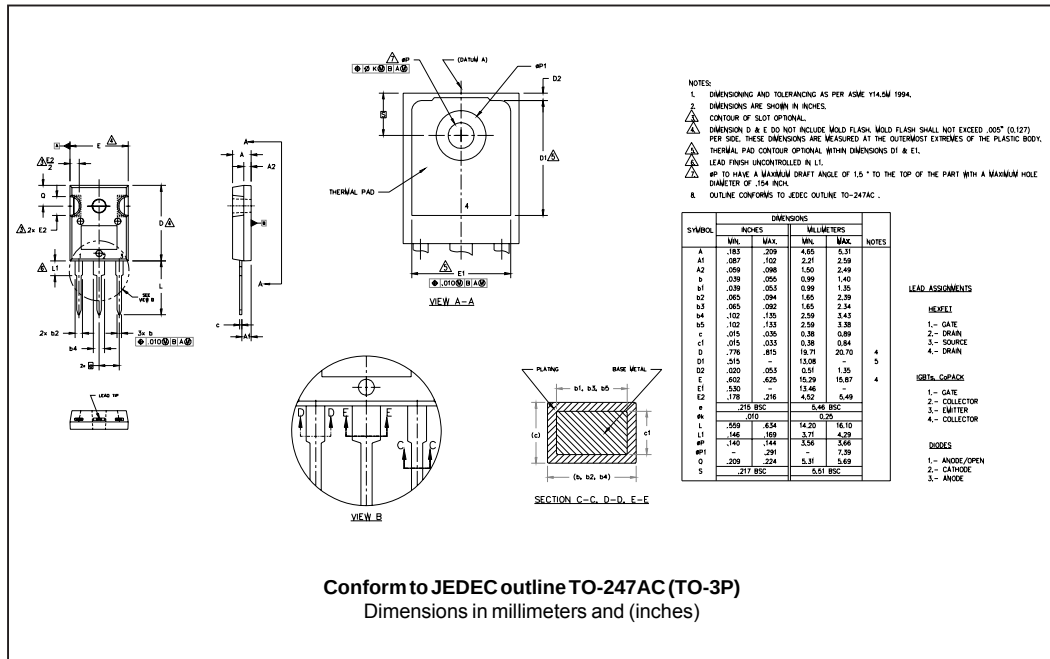

Marking Information

EXAMPLE: THIS IS A 72CPQ030
WITH ASSEMBLY
LOT CODE 5657
ASSEMBLED ON WW 35, 2000
IN ASSEMBLY LINE "H"

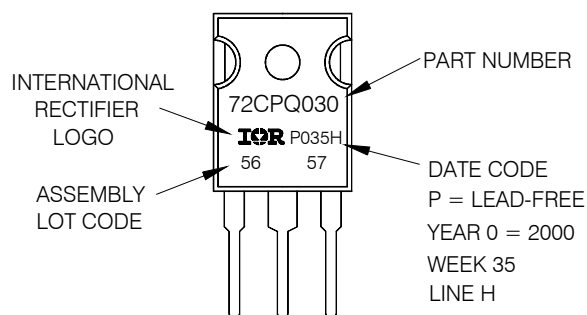

Ordering Information Table

Device Code

72	C	P	Q	030	PbF
1	2	3	4	5	6

- 1** - Current Rating (70A)
- 2** - Circuit Configuration
C = Common Cathode
- 3** - Package
P = TO-247
- 4** - Schottky "Q" Series
- 5** - Voltage Code (030 = 30V)
- 6** -
 - none = Standard Production
 - PbF = Lead-Free

Tube Standard Pack Quantity : 25 pieces

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level and Lead-Free.
Qualification Standards can be found on IR's Web site.