

Marketing Bulletin

DATE: Saturday, April 01, 2000
TO: Affected Customers
FROM: Marketing
RE: ECCM63 Series Termination

To all concerned parties,

This bulletin is to notify all customers of the discontinuation of the ECCM63 series Ecliptek crystal effective Saturday, April 01, 2000.

In compliance with our End of Life (EOL) policy, this notice will serve as advanced notice of product termination. New orders will not be accepted after Saturday, July 01, 2000, with delivery to be conclude by Saturday, September 30, 2000.

The ECCM1 series is a recommended alternate for the ECCM61 series. This may not be an exact cross, so it is highly recommended that the data sheet(s) of the recommended alternate are reviewed and samples tested to ensure conformance.

If there are any questions pertaining to this bulletin, please contact your Ecliptek sales representative. Thank you again for your cooperation.

Ecliptek Marketing

STANDARD SPECIFICATIONS

Frequency Range:	9.216MHz to 100.000MHz	ORIGINAL IF IN RED
Frequency Tolerance/Stability:		
Blank	±50ppm at 25°C, ±100ppm over -10°C to +60°C	
J	±30ppm at 25°C, ±50ppm over -10°C to +60°C	
Shunt Capacitance (C0)	7pF Maximum	
Load Capacitance (CL)	18pF Standard, CL ≥ 10pF and Series Available	
Mode of Operation		
Blank	Fundamental from 9.216MHz to 41.000MHz	
T	Third Overtone from 28.000MHz to 100.000MHz	
Storage Temperature	-40°C to +85°C	
Drive Level	100 µWatts Maximum	
Aging @ 25°C	±5ppm/year Maximum	
Insulation Resistance	500 Megaohms Minimum at 100Vdc	


ENVIRONMENTAL & MECHANICAL

Shock:	Conditions and Criteria Listed in TQC41-883-007
Vibration:	Conditions and Criteria Listed in TQC41-883-008
Seal Integrity:	Conditions and Criteria Listed in TQC41-883-003
Solderability:	Conditions and Criteria Listed in TQC41-883-004 / 95% coverage
Marking Permanency:	Conditions and Criteria Listed in TQC41-883-001

FREQUENCY VS. EQUIVALENT SERIES RESISTANCE (ESR Ohms Maximum)

Frequency Range	ESR	Frequency Range	ESR	Frequency Range	ESR	Frequency Range	ESR
9.216 - 15.999 (Fund)	60	16.000 - 41.000 (Fund)	40	28.000 - 34.999 (3rd)	100	35.000 - 100.000 (3rd)	60

ALL DIMENSIONS
IN MILLIMETERS

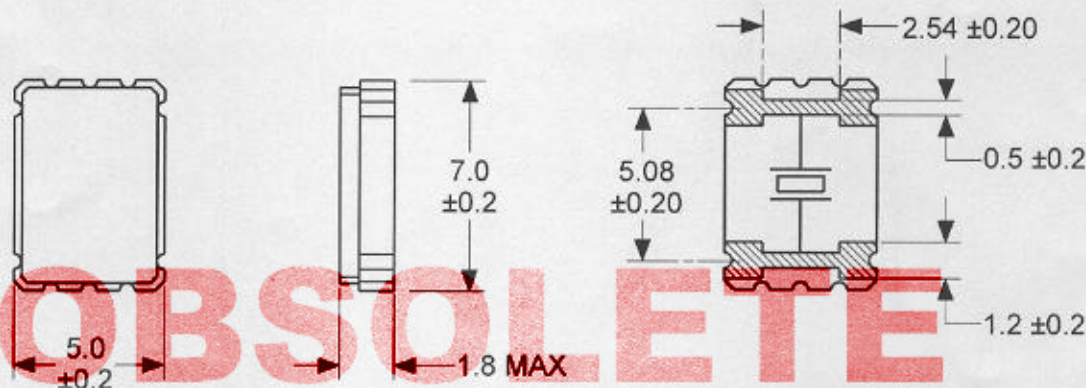

OBSOLETE

PART NUMBERING GUIDE

ECCM63 J T - 20 - 35.000M TR

- Packaging Options**
 - Blank = Bulk
 - TR = Tape & Reel (CPA70-281-000)
- Frequency**
 - Blank = 18pF (Standard)
 - S = Series
 - XX = XXpF (Custom)
- Mode of Operation**
 - Blank = Fundamental
 - T = Third Overtone
- Frequency Tolerance/Stability**
 - Blank = ±50ppm at 25°C, ±100ppm over -10°C to +60°C
 - J = ±30ppm at 25°C, ±50ppm over -10°C to +60°C

MARKING GUIDE


(Line #1) EXX.XX

Frequency in MHz

(Line #2) XX Y ZZ

Week of Year
Year (Last Digit)

Ecliptek Manufacturing Code
(per TEN02-001-000)



NOTE: Parts shall have Laser Etch marking only. Laser Etch shall conform to conditions listed in TQC41-001-000.

SPECIFICATION CONTROL DRAWING

	Drawing Number
	CCR46-001-000
Title	
CERAMIC SURFACE MOUNT CRYSTAL	