

$V_{RRM} = 2500 \text{ V}$
 $I_{FAVM} = 490 \text{ A}$
 $I_{FSM} = 8.5 \times 10^3 \text{ A}$
 $V_{F0} = 1.4 \text{ V}$
 $r_F = 0.52 \text{ m}\Omega$
 $V_{DClink} = 1100 \text{ V}$

Fast Recovery Diode

5SDF 05D2501

Doc. No. 5SYA1112-03 Jan. 03

- Patented free-floating silicon technology
- Low switching losses
- Optimized for use as snubber diode in GTO converters
- Industry standard press-pack ceramic housing, hermetically cold-welded
- Cosmic radiation withstand rating

Blocking

Maximum rated values ¹⁾

Parameter	Symbol	Conditions	Value	Unit
Repetitive peak reverse voltage	V_{RRM}	$f = 50 \text{ Hz}$, $t_p = 10\text{ms}$, $T_j = 125^\circ\text{C}$	2500	V
Permanent DC voltage for 100 FIT failure rate	V_{DClink}	Ambient cosmic radiation at sea level in open air. (100% Duty)	1100	V
Permanent DC voltage for 100 FIT failure rate	V_{DClink}	Ambient cosmic radiation at sea level in open air. (5% Duty)	1500	V

Characteristic values

Parameter	Symbol	Conditions	min	typ	max	Unit
Repetitive peak reverse current	I_{RRM}	$V_R = V_{RRM}$, $T_j = 125^\circ\text{C}$			50	mA

Mechanical data

Maximum rated values ¹⁾

Parameter	Symbol	Conditions	min	typ	max	Unit
Mounting force	F_M		10	11	12	kN
Acceleration	a	Device unclamped			50	m/s^2
Acceleration	a	Device clamped			200	m/s^2

Characteristic values

Parameter	Symbol	Conditions	min	typ	max	Unit
Weight	m			0.25		kg
Housing thickness	H			26		mm
Pole-piece diameter	D_P			34		mm
Surface creepage distance	D_S		30			mm
Air strike distance	D_a		20			mm

1) Maximum rated values indicate limits beyond which damage to the device may occur

ABB Switzerland Ltd, Semiconductors reserves the right to change specifications without notice.



On-state

Maximum rated values ¹⁾

Parameter	Symbol	Conditions	min	typ	max	Unit
Max. average on-state current	I_{FAVM}	Half sine wave, $T_C = 85\text{ °C}$			490	A
Max. RMS on-state current	I_{FRMS}				770	A
Max. peak non-repetitive surge current	I_{FSM}	$t_p = 10\text{ ms}$, $T_j = 125\text{ °C}$, $V_R \approx 0\text{ V}$			8.5×10^3	A
Limiting load integral	I^2t				360×10^3	A ² s
Max. peak non-repetitive surge current	I_{FSM}	$t_p = 1\text{ ms}$, $T_j = 125\text{ °C}$, $V_R \approx 0\text{ V}$			27×10^3	A
Limiting load integral	I^2t				370×10^3	A ² s

Characteristic values

Parameter	Symbol	Conditions	min	typ	max	Unit
On-state voltage	V_F	$I_F = 1000\text{ A}$, $T_j = 125\text{ °C}$			1.9	V
Threshold voltage	$V_{(TO)}$	$T_j = 125\text{ °C}$ $I_T = 600 \dots 4000\text{ A}$			1.4	V
Slope resistance	r_T				0.52	mΩ

Turn-on

Characteristic values

Parameter	Symbol	Conditions	min	typ	max	Unit
Peak forward recovery voltage	V_{fr}	$di/dt = 500\text{ A/}\mu\text{s}$, $T_j = 125\text{ °C}$			17	V

Turn-off

Characteristic values

Parameter	Symbol	Conditions	min	typ	max	Unit
Reverse recovery current	I_{RM}	$di/dt = 250\text{ A/}\mu\text{s}$, $T_j = 125\text{ °C}$, $I_F = 1000\text{ A}$, $V_{RM} = 2500\text{ V}$, $R_S = 5\text{ }\Omega$, $C_S = 0.10\text{ }\mu\text{F}$			400	A
Reverse recovery charge	Q_{rr}				1150	μC
Turn-off energy	E_{rr}				--	J

Thermal

Maximum rated values ¹⁾

Parameter	Symbol	Conditions	min	typ	max	Unit
Operating junction temperature range	T_{vj}		-40		125	°C
Storage temperature range	T_{stg}		-40		125	°C

Characteristic values

Parameter	Symbol	Conditions	min	typ	max	Unit
Thermal resistance junction to case	$R_{th(j-c)}$	Double-side cooled			40	K/kW
	$R_{th(j-c)A}$	Anode-side cooled			80	K/kW
	$R_{th(j-c)C}$	Cathode-side cooled			80	K/kW
Thermal resistance case to heatsink	$R_{th(c-h)}$	Double-side cooled			8	K/kW
	$R_{th(c-h)}$	Single-side cooled			16	K/kW

Analytical function for transient thermal impedance:

$$Z_{thJC}(t) = \sum_{i=1}^n R_i(1 - e^{-t/\tau_i})$$

i	1	2	3	4
$R_i(K/kW)$	20.950	10.570	7.150	1.330
$\tau_i(s)$	0.3960	0.0720	0.0090	0.0044

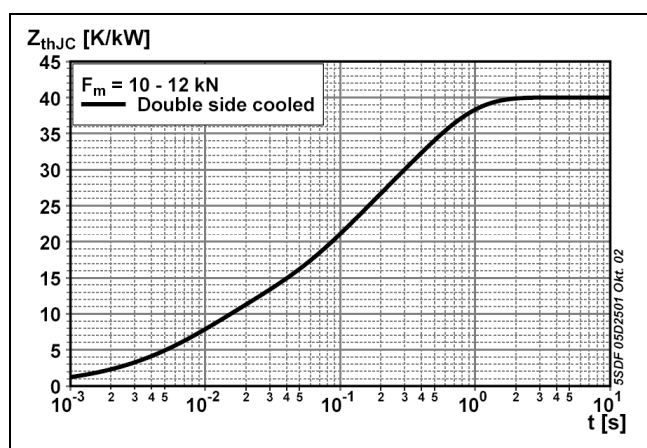


Fig. 1 Transient thermal impedance junction-to-case.

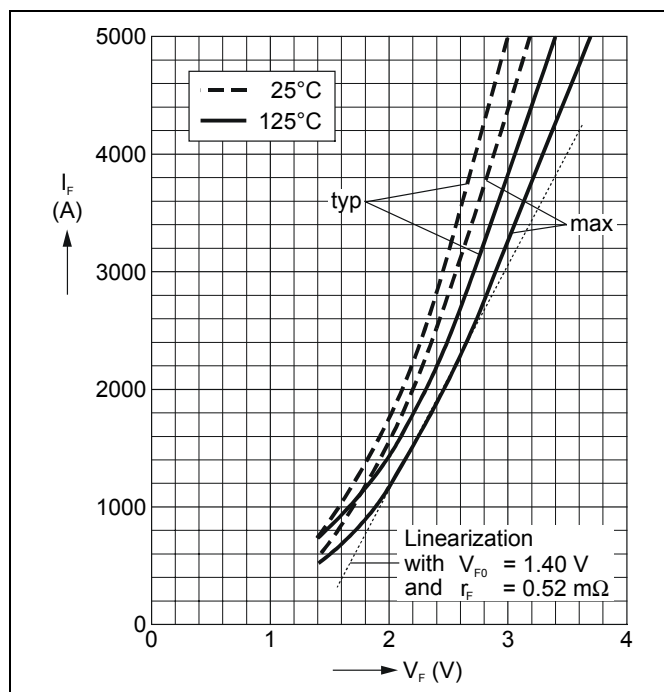


Fig. 2 Forward current vs. forward voltage (typ. and max. values) and linear approximation of max. curve at 125°C.

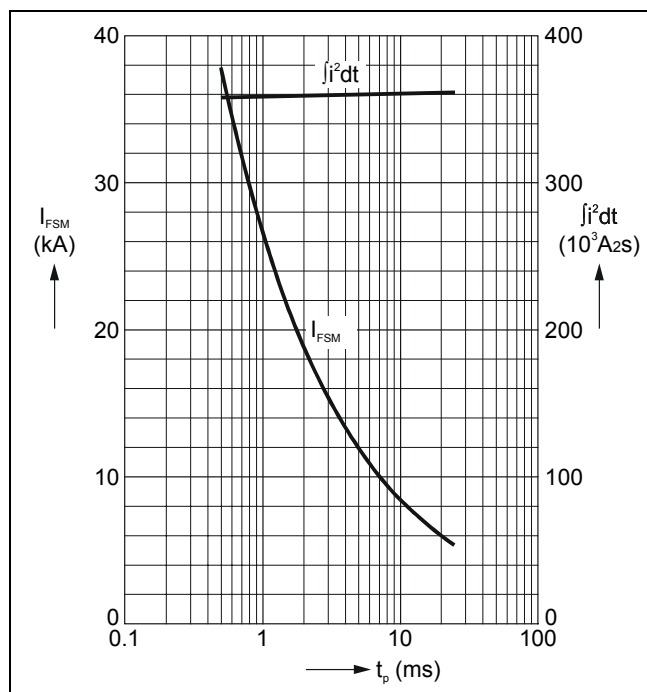


Fig. 3 Surge current and fusing integral vs. pulse width (max. values) for non-repetitive, half-sinusoidal surge current pulses.

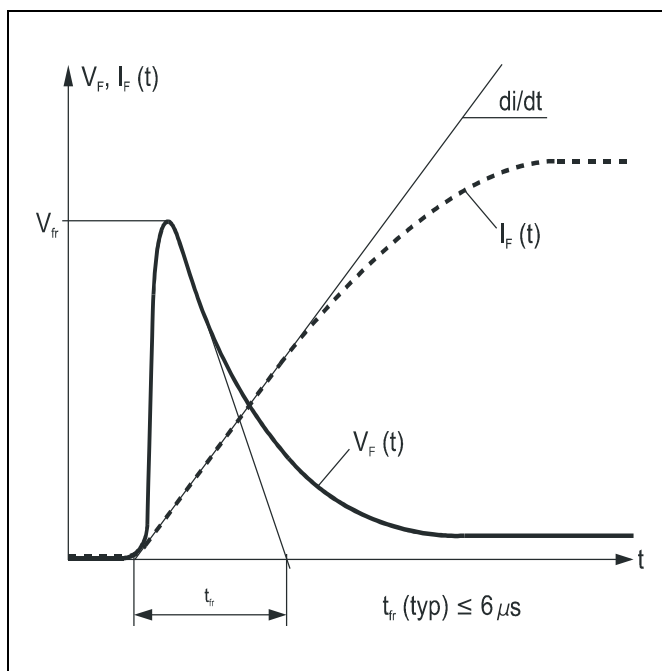


Fig. 4 Typical forward voltage waveform when the diode is turned on with a high di/dt .

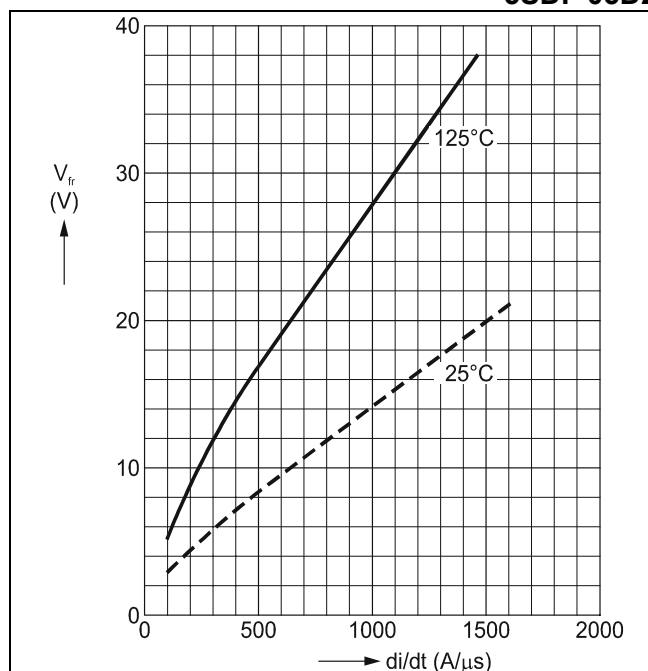


Fig. 5 Forward recovery voltage vs. turn-on di/dt (max. values).

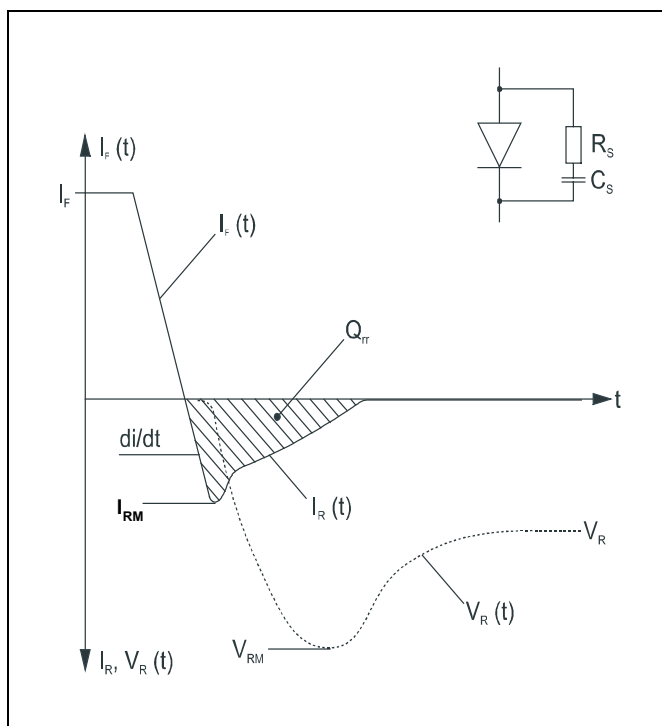


Fig. 6 Typical current and voltage waveforms at turn-off with conventional RC snubber circuit.

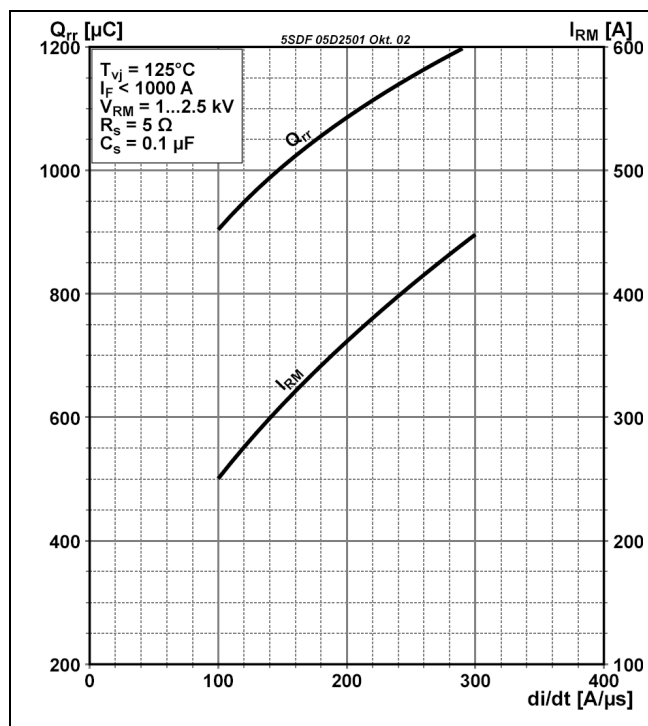


Fig. 7 Peak reverse recovery current vs. di_F/dt , $I_F = 1000$ A; $T_J = T_{Jmax}$, limit values

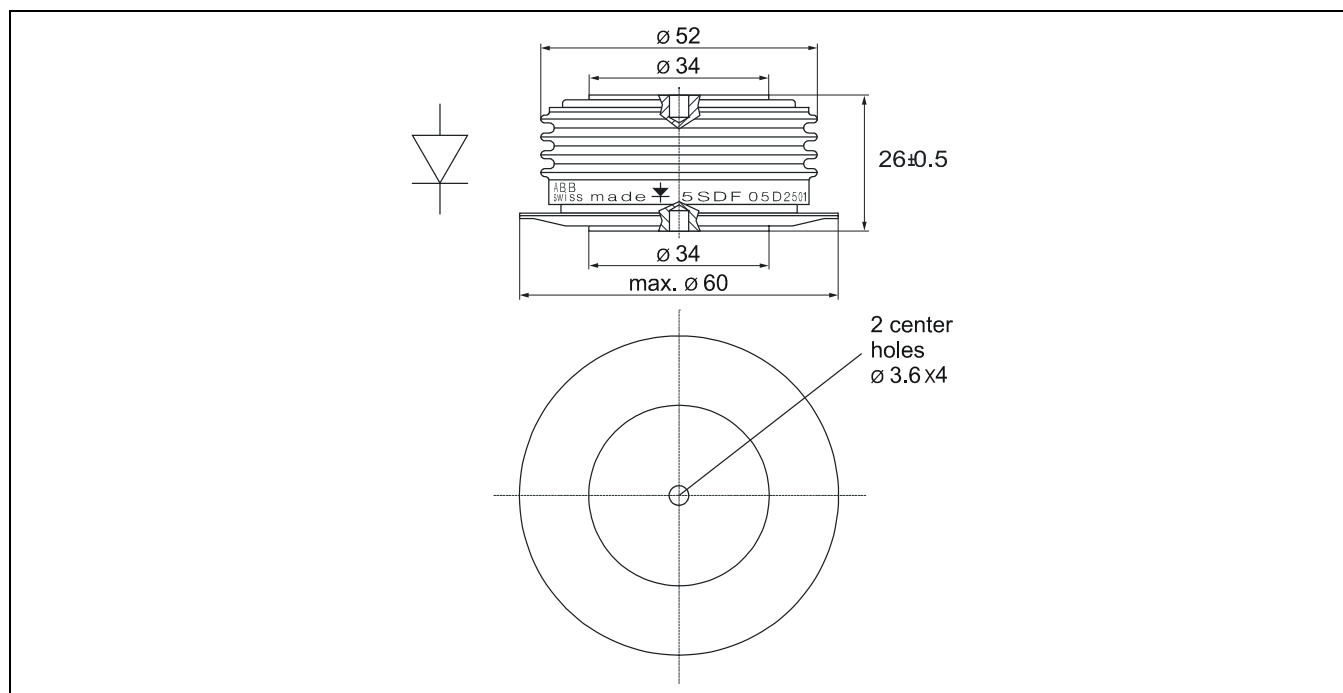


Fig. 8 Outline drawing. All dimensions are in millimeters and represent nominal values unless stated otherwise.

ABB Switzerland Ltd, Semiconductors reserves the right to change specifications without notice.



ABB Switzerland Ltd
Semiconductors
 Fabrikstrasse 3
 CH-5600 Lenzburg, Switzerland

Doc. No. 5SYA1112-03 Jan. 03

Telephone +41 (0)58 586 1419
 Fax +41 (0)58 586 1306
 Email abbsem@ch.abb.com
 Internet www.abb.com/semiconductors