



New



mm inch



Compliance with RoHS Directive


## FEATURES

### 1. Super miniature SON\* package contributes to space savings and high density mounting.


The SON type is a new PhotoMOS relay with approximately 43% the volume ratio of existing SSOP type. The super miniature leadless construction reduces the mounting area and enables high density mounting.

### \*Small Outline No-lead package

Reduced to approximately 43% volume ratio

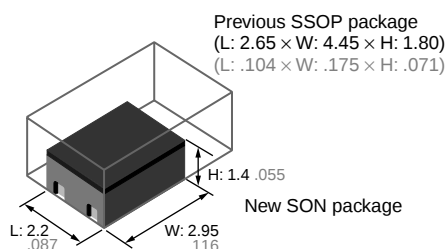

Area comparison (including leads)

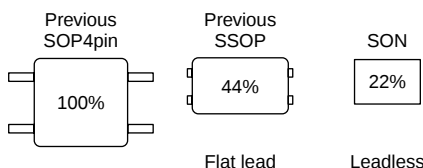

### 2. Both low on-resistance (R type) and low capacitance (C type) available at C×R10

- R type: On resistance 0.8Ω (typ.)  
Output capacitance 14pF (typ.)
- C type: On resistance 9.5Ω (typ.)  
Output capacitance 1.1pF (typ.)

## TYPICAL APPLICATIONS

1. Measuring equipment  
IC tester, Probe cards, board tester and other testing equipment
2. Telecommunication or broadcasting equipment
3. Medical equipment

## TYPES

|                | Type                       | Output rating*1 |              | Package | Tape and reel packing style*2    |                                  | Packing quantity in tape and reel |
|----------------|----------------------------|-----------------|--------------|---------|----------------------------------|----------------------------------|-----------------------------------|
|                |                            | Load voltage    | Load current |         | Picked from the 1 and 4-pin side | Picked from the 2 and 3-pin side |                                   |
| AC/DC dual use | Low on-resistance (R type) | 40 V            | 250 mA       | SON     | AQY221R2MY                       | AQY221R2MW                       | 3,500 pcs.                        |
|                | Low capacitance (C type)   | 40 V            | 120 mA       |         | AQY221N2MY                       | AQY221N2MW                       |                                   |

Notes: \*1 Indicate the peak AC and DC values.

\*2 Only tape and reel package is available.

For space reasons, only "1R2" or "1N2" is marked on the product as the part number.

## RATING

### 1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

| Item                    |                         | Symbol            | AQY221R2M                       | AQY221N2M | Remarks                            |
|-------------------------|-------------------------|-------------------|---------------------------------|-----------|------------------------------------|
| Input                   | LED forward current     | I <sub>F</sub>    | 50mA                            |           |                                    |
|                         | LED reverse voltage     | V <sub>R</sub>    | 5V                              |           |                                    |
|                         | Peak forward current    | I <sub>FP</sub>   | 1A                              |           | f=100 Hz, Duty factor=0.1%         |
|                         | Power dissipation       | P <sub>in</sub>   | 75mW                            |           |                                    |
| Output                  | Load voltage (peak AC)  | V <sub>L</sub>    | 40V                             | 40V       |                                    |
|                         | Continuous load current | I <sub>L</sub>    | 0.25A                           | 0.12A     | Peak AC, DC                        |
|                         | Peak load current       | I <sub>peak</sub> | 0.75A                           | —         | 100ms (1shot), V <sub>L</sub> =DC  |
|                         | Power dissipation       | P <sub>out</sub>  | 250mW                           |           |                                    |
| Total power dissipation |                         | P <sub>T</sub>    | 300mW                           |           |                                    |
| I/O isolation voltage   |                         | V <sub>iso</sub>  | 200V AC                         |           |                                    |
| Operating temperature   |                         | T <sub>opr</sub>  | −40°C to +85°C −40°F to +185°F  |           | Non-condensing at low temperatures |
| Storage temperature     |                         | T <sub>stg</sub>  | −40°C to +100°C −40°F to +212°F |           |                                    |


RF SON 1 Form A C×R10 (AQY221○2M)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item                     |                           |         | Symbol            | R type                                   | C type    | Condition                                                                                                                                                       |
|--------------------------|---------------------------|---------|-------------------|------------------------------------------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                          |                           |         |                   | AQY221R2M                                | AQY221N2M |                                                                                                                                                                 |
| Input                    | LED operate current       | Typical | I <sub>Fon</sub>  | 0.8 mA                                   | 1.0 mA    | R type: I <sub>L</sub> = 250 mA<br>C type: I <sub>L</sub> = 80 mA                                                                                               |
|                          |                           | Maximum |                   | 3.0 mA                                   |           |                                                                                                                                                                 |
|                          | LED turn off current      | Minimum | I <sub>Foff</sub> | 0.2 mA                                   |           |                                                                                                                                                                 |
|                          |                           | Typical |                   | 0.7 mA                                   | 0.9 mA    |                                                                                                                                                                 |
|                          | LED dropout voltage       | Typical | V <sub>F</sub>    | 1.35 V (1.14 V at I <sub>F</sub> = 5 mA) |           | I <sub>F</sub> = 50 mA                                                                                                                                          |
|                          |                           | Maximum |                   | 1.5 V                                    |           |                                                                                                                                                                 |
| Output                   | On resistance             | Typical | R <sub>on</sub>   | 0.8Ω                                     | 9.5Ω      | R type: I <sub>F</sub> = 5 mA, I <sub>L</sub> = 250 mA<br>C type: I <sub>F</sub> = 5 mA, I <sub>L</sub> = 80 mA<br>Within 1 s on time                           |
|                          |                           | Maximum |                   | 1.25Ω                                    | 12.5Ω     |                                                                                                                                                                 |
|                          | Output capacitance        | Typical | C <sub>out</sub>  | 14 pF                                    | 1.1 pF    | I <sub>F</sub> = 0 mA<br>V <sub>B</sub> = 0 V<br>f = 1 MHz                                                                                                      |
|                          |                           | Maximum |                   | 18 pF                                    | 1.5 pF    |                                                                                                                                                                 |
|                          | Off state leakage current | Typical | I <sub>Leak</sub> | 0.01 nA                                  |           | I <sub>F</sub> = 0 mA<br>V <sub>L</sub> = Max.                                                                                                                  |
|                          |                           | Maximum |                   | 10 nA                                    |           |                                                                                                                                                                 |
| Transfer characteristics | Turn on time*             | Typical | T <sub>on</sub>   | 0.2 ms                                   | 0.02 ms   | R type:<br>I <sub>F</sub> = 5 mA, V <sub>L</sub> = 10 V, R <sub>L</sub> = 40Ω<br>C type:<br>I <sub>F</sub> = 5 mA, V <sub>L</sub> = 10 V, R <sub>L</sub> = 125Ω |
|                          |                           | Maximum |                   | 0.5 ms                                   | 0.2 ms    |                                                                                                                                                                 |
|                          | Turn off time*            | Typical | T <sub>off</sub>  | 0.04 ms                                  | 0.02 ms   | f = 1 MHz<br>V <sub>B</sub> = 0 V                                                                                                                               |
|                          |                           | Maximum |                   | 0.2 ms                                   |           |                                                                                                                                                                 |
|                          | I/O capacitance           | Typical | C <sub>iso</sub>  | 0.8 pF                                   |           |                                                                                                                                                                 |
|                          |                           | Maximum |                   | 1.5 pF                                   |           |                                                                                                                                                                 |

Note: Variation possible through combinations of output capacitance and on resistance. For more information, please contact our sales office in your area.

\*Turn on/Turn off time

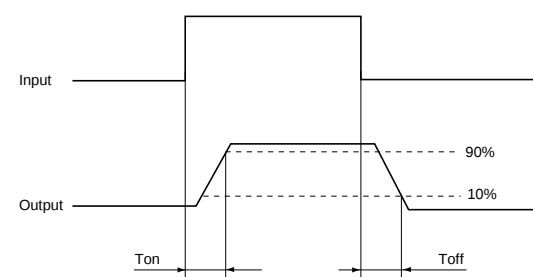

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper relay operation and resetting.

| Item              | Symbol         | Recommended value | Unit |
|-------------------|----------------|-------------------|------|
| Input LED current | I <sub>F</sub> | 5                 | mA   |

- For Dimensions
- For Schematic and Wiring Diagrams
- For Cautions for Use

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Electric Works technical representative.

For more information

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

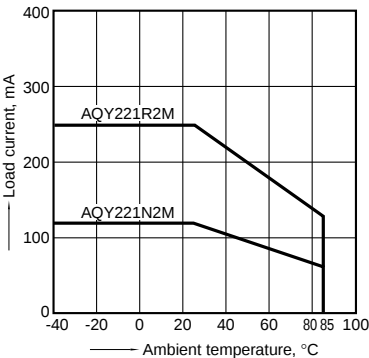


2. Load current vs. Load voltage characteristics

Ambient temperature: 25°C 77°F

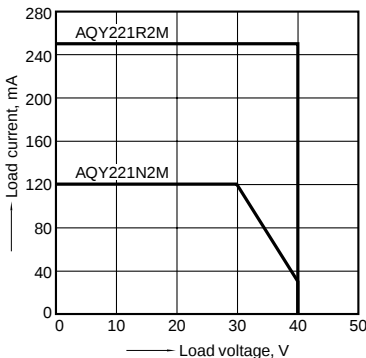

3. On resistance vs. ambient temperature characteristics


Measured portion: between terminals 3 and 4;  
LED current: 5 mA; Load voltage: 10V (DC); Load current: 250mA (DC) R type, 80mA (DC) C type

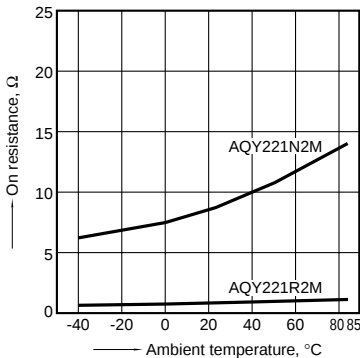

# RF SON 1 Form A C×R10 (AQY221○2M)


## 4. Turn on time vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4; LED current: 5 mA; Load voltage: 10V (DC); Continuous load current: 250mA (DC) R type, 80mA (DC) C type

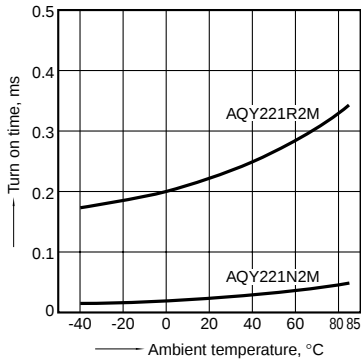


## 5. Turn off time vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4; LED current: 5 mA; Load voltage: 10V (DC); Continuous load current: 250mA (DC) R type, 80mA (DC) C type

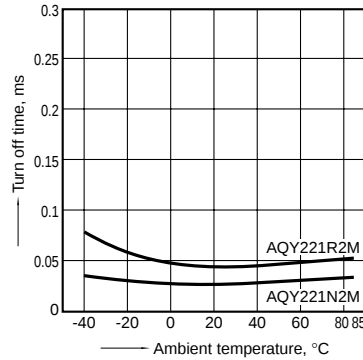


## 6. LED operate current vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4; Load voltage: 10V (DC); Continuous load current: 250mA (DC) R type, 80mA (DC) C type

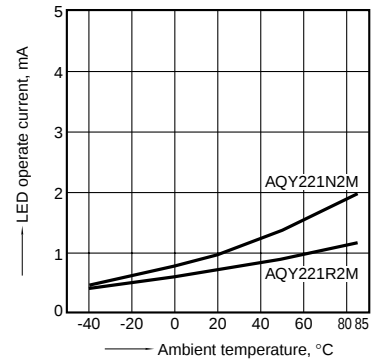


## 7. LED turn off current vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4; Load voltage: 10V (DC); Continuous load current: 250mA (DC) R type, 80mA (DC) C type

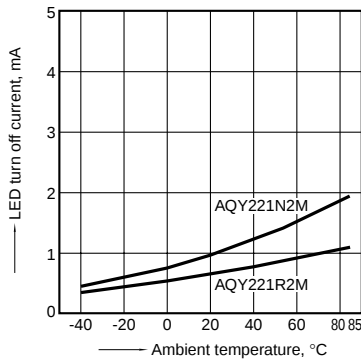


## 8. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

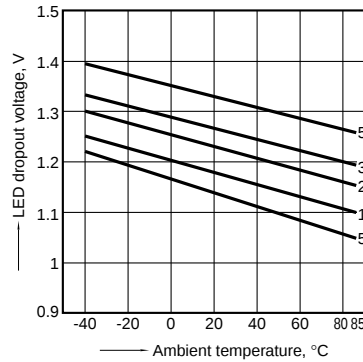


## 9. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F




## 10. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F

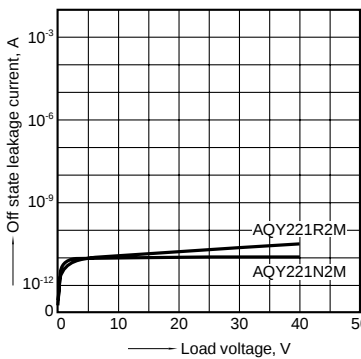


## 11. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4; Load voltage: 10V (DC); Continuous load current: 250mA (DC) R type, 80mA (DC) C type; Ambient temperature: 25°C 77°F

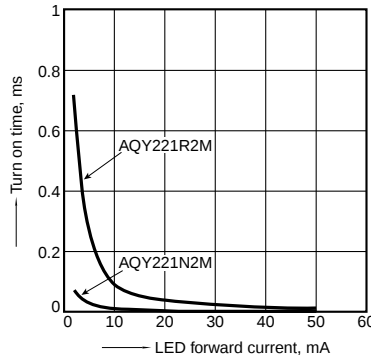


## 12. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4; Load voltage: 10V (DC); Continuous load current: 250mA (DC) R type, 80mA (DC) C type; Ambient temperature: 25°C 77°F

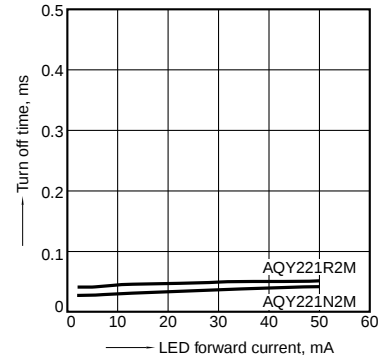


## 13. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4; Frequency: 1 MHz, 30m Vrms; Ambient temperature: 25°C 77°F

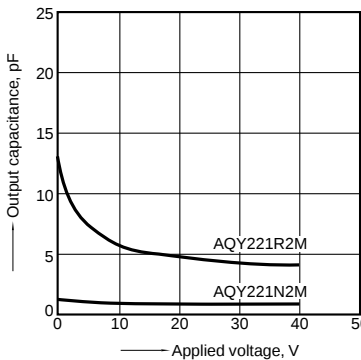


## 14. Isolation vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F

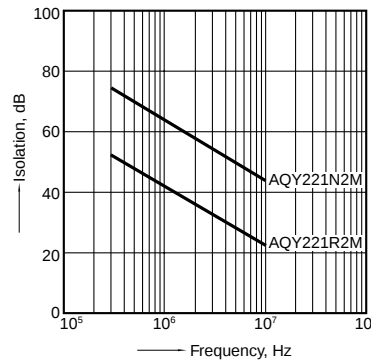

## 15. Insertion loss vs. frequency characteristics (50Ω impedance)


Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F

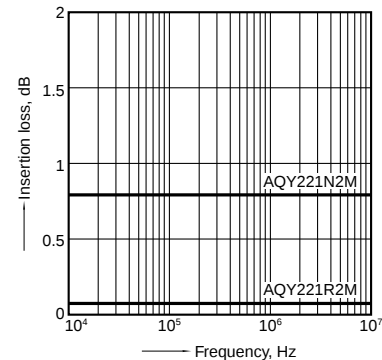

# RF SON 1 Form A C×R10 (AQY221○2M)


## 16.-(1) On resistance distribution

Sample: AQY221R2M; Measured portion: between terminals 3 and 4; Continuous load current: 250mA (DC) R type, 80mA (DC) C type, n: 50pcs.  
Ambient temperature: 25°C 77°F

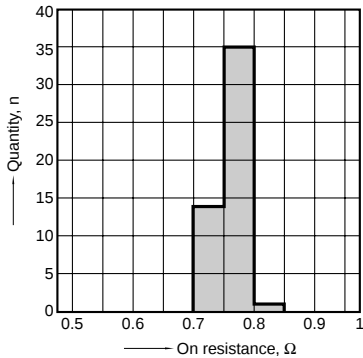


## 16.-(2) On resistance distribution

Sample: AQY221N2M; Measured portion: between terminals 3 and 4; Continuous load current: 250mA (DC) R type, 80mA (DC) C type, n: 50pcs.  
Ambient temperature: 25°C 77°F

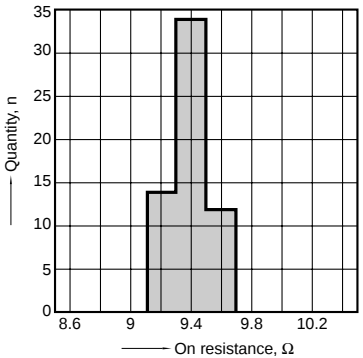


## 17.-(1) Turn on time distribution

Sample: AQY221R2M; Load voltage: 10V (DC)  
Continuous load current: 250mA (DC) R type, 80mA (DC) C type, n: 50pcs.  
Ambient temperature: 25°C 77°F

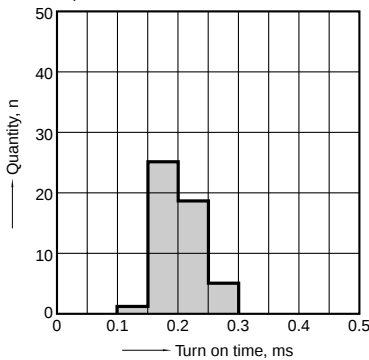


## 17.-(2) Turn on time distribution

Sample: AQY221N2M; Load voltage: 10V (DC)  
Continuous load current: 250mA (DC) R type, 80mA (DC) C type, n: 50pcs.  
Ambient temperature: 25°C 77°F

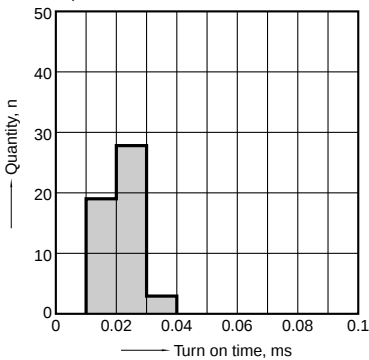


## 18.-(1) Turn off time distribution

Sample: AQY221R2M; Load voltage: 10V (DC)  
Continuous load current: 250mA (DC) R type, 80mA (DC) C type, n: 50pcs.  
Ambient temperature: 25°C 77°F

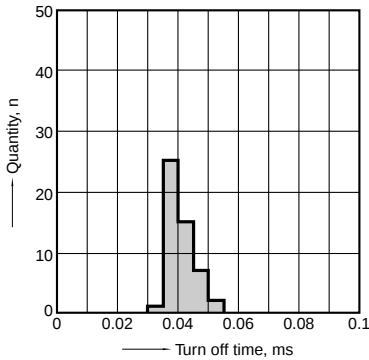


## 18.-(2) Turn off time distribution

Sample: AQY221N2M; Load voltage: 10V (DC)  
Continuous load current: 250mA (DC) R type, 80mA (DC) C type, n: 50pcs.  
Ambient temperature: 25°C 77°F

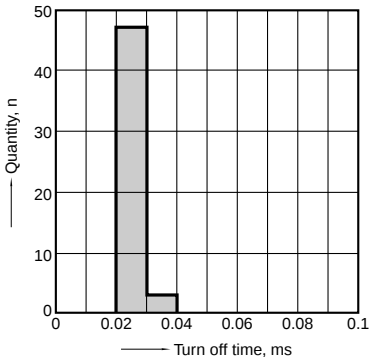

## 19.-(1) LED operate current distribution

Sample: AQY221R2M; Load voltage: 10V (DC)  
Continuous load current: 250mA (DC) R type, 80mA (DC) C type, n: 50pcs.  
Ambient temperature: 25°C 77°F

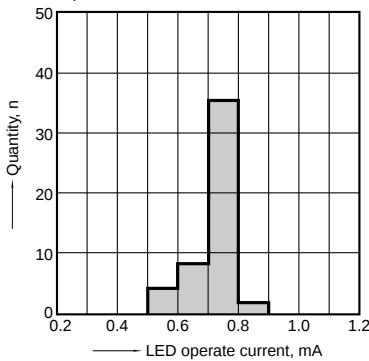

## 19.-(2) LED operate current distribution

Sample: AQY221N2M; Load voltage: 10V (DC)  
Continuous load current: 250mA (DC) R type, 80mA (DC) C type, n: 50pcs.  
Ambient temperature: 25°C 77°F

