
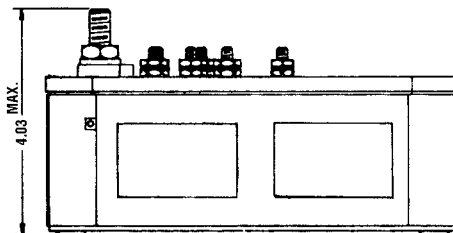


A-751YC SPST N.O., 650 Amps, 340 VDC

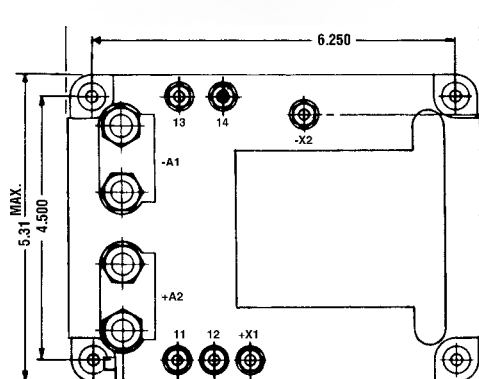

Dimensions for this product are expressed in inches.
Multiply values by 25.4 for millimeters.


PRODUCT SPECIFICATIONS

Construction	Gasket Sealed, Vented
Main Contacts:	
Configuration	SPST N.O.
Voltage (Nominal)	340 VDC
Current (Resistive)	650 Amps
Auxiliary Contacts:	
Configuration	1 FORM C
Voltage (Nominal)	28 VDC
Current	
Resistive	10 Amps
Inductive	5 Amps
Lamp	3 Amps
Coil Data:	
Duty Cycle	Continuous (Economized)
Voltage (Nominal)	28 VDC
Pick-Up Voltage	20 VDC Maximum
Drop-Out Voltage	1.5 - 12 VDC
Coil Current @ 28 VDC & +25°C	
In-Rush	15.6 Amps
Hold	0.32 Amp
Operating Temperature	-55°C to +71°C
Life:	
Electrical	500 Cycles, Make, Carry & Break; 50,000 Cycles, Make & Carry
Mechanical	100,000 Cycles
Weight Maximum	7 Lbs.

Features:

- SPST N.O. Main Contacts
- Economizing Coil
- 340 VDC
- 650 Amps
- High Reliability
- Meets many requirements of MIL-R-6106

CONTACTOR CONFIGURATION

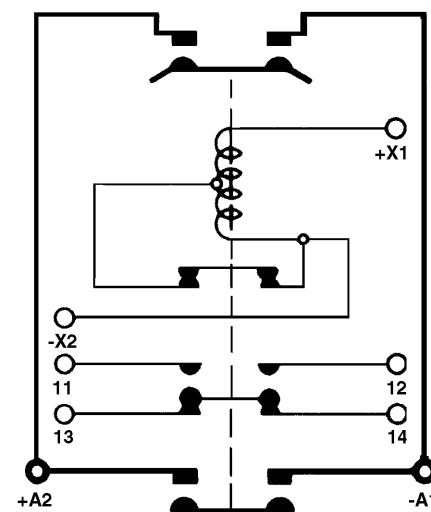

Notes:

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved.
HARTMAN and TYCO are trademarks.