

FBR244 SERIES

- Gold-overlay bifurcated contact
Contact material and shape especially suitable for signal switching; assures reliability at low level switching.
- Conforms to FCC68 standards
High voltage relays are also available with dielectric strength greater than 1,000 VAC and surge strength greater than 1,500 V.
- Formed terminals for temporary mounting
Kink terminals enable FBR240 Series relays to be mounted temporarily on a PC board.
- Automatic mounting
Shipped in carrier case plastic magazine suitable for automatic mounting.
- UL and CSA recognized



[Example] $\frac{\text{FBR244}}{(a)} \quad \frac{\text{N}}{(b)} \quad \frac{\text{D}}{(c)} \quad \frac{012}{(d)} \quad / \quad \frac{02C}{(e)} \quad \frac{S}{(f)} \quad \frac{-2}{(g)} \quad \frac{-CSA}{(h)}$

Note: The designation name is stamped on the top of the relay case as follows:
(Example) Designation ordered: FBR244D012/02CE
Stamp: 244D012/02CE

FBR244 SERIES


■ SAFETY STANDARD AND FILE NUMBERS

UL114 (File No. E63615)

C22.2 No. 14 (File No. LR40304 or LR64026)

Nominal voltage	Contact rating
3 to 48 VDC	2 A 28 VDC resistive 0.5 A 120 VAC resistive

■ SPECIFICATIONS

Item			S contact	P contact	T contact	E contact
Contact	Arrangement		2 form C (DPDT)			
	Style		Single		Bifurcated	
	Material		Gold-overlay silver	Gold-overlay silver-palladium	Gold-overlay silver	Gold-overlay silver-palladium
	Resistance (initial)		Maximum 100 mΩ (at 0.1 A 6 VDC)			
	Ratings		0.5 A 120 VAC or 1 A 30 VDC (resistive load)			
	Maximum Carrying Current		2 A			
	Maximum Switching Power		60 AV or 30 W			
	Max. Switching Voltage*1		220 VAC or 150 VDC			
	Maximum Switching Current		1.25 A (AC) or 2 A (DC)			
	Min. applicable load*2 (Reference)		Plastic sealed	1 mA 5 VDC	1 mA 1 VDC	1 mA 1 VDC
Flux free			5 mA 5 VDC	1 mA 5 VDC	1 mA 5 VDC	1 mA 1 VDC
Coil	Nominal Power (at 20°C)		Approximately 0.5 W to 0.58 W (standard), approximately 0.55 W (G type)			
	Operate Power (at 20°C)		Approximately 0.28 W (standard), approximately 0.25 W (G type)			
	Operating Temperature		-30°C to +70°C (no frost) (refer to the CHARACTERISTIC DATA)			
	Operating Humidity		45 to 85%RH			
Time Value	Operate (at nominal voltage)		Maximum 6 ms			
	Release (at nominal voltage)		Maximum 3 ms			
Insulation	Resistance (initial)		Minimum 100 MΩ (at 500 VDC)			
	Dielectric Strength	Between coil and contacts	500 VAC 1 minute (standard) 1,000 VAC 1 minute (high dielectric strength type)			
		Between open contacts	500 VAC 1 minute			
	Surge Strength		1,500 V (at 10 × 700 μs)			
Life	Mechanical		20 × 10 ⁶ operations minimum			
	Electrical (refer to the REFERENCE DATA)	DC	500 × 10 ³ operations minimum (at contact rating)			
		AC	100 × 10 ³ operations minimum (at contact rating)			
Other	Vibration Resistance		10 to 55 Hz (double amplitude of 1.5 mm)			
	Shock Resistance	Misoperation	200 m/s ² (11 ± ¹ ms)			
		Endurance	1,000 m/s ² (11 ± ¹ ms)			
	Weight		Approximately 4.5 g			

*1 If the switching voltage exceeds the rated contact voltage, reduce the current. The current values vary according to the type of load.

*2 Values when switching a resistive load at normal room temperature and humidity, and in a clean environment. The minimum switching load varies with the switching frequency and operation environment.

COIL DATA CHART

1. STANDARD (D type)

MODEL		Nominal voltage	Coil resistance ±10%	Nominal current (at nominal voltage) approx.	Must operate voltage	Must release voltage	Nominal power	Operate power	Coil temperature rise
□ S, P, T, E									
Flux free	Plastic sealed								
FBR244D003/02□	FBR244ND003/02□	3 VDC	18 Ω	167 mA	75% max. of nominal voltage	10% min. of nominal voltage	Approx. 500 mW (at nominal voltage)	Approx. 280 mW max.	Approx. 45 deg (at nominal voltage)
FBR244D005/02□	FBR244ND005/02□	5 VDC	50 Ω	100 mA					
FBR244D006/02□	FBR244ND006/02□	6 VDC	72 Ω	83 mA					
FBR244D009/02□	FBR244ND009/02□	9 VDC	162 Ω	56 mA					
FBR244D012/02□	FBR244ND012/02□	12 VDC	290 Ω	41 mA					
FBR244D024/02□	FBR244ND024/02□	24 VDC	1,150 Ω	21 mA					
FBR244D048/02□	FBR244ND048/02□	48 VDC	4,000 Ω	12 mA			580 mW		53 deg

Note: All values in the table are measured at 20°C.


2. G TYPE

MODEL		Nominal voltage	Coil resistance ±10%	Nominal current (at nominal voltage) approx.	Must operate voltage	Must release voltage	Nominal power	Operate power	Coil temperature rise
□ S, P, T, E									
Flux free	Plastic sealed								
FBR244G005/02□	FBR244NG005/02□	4.5 VDC	36 Ω	125 mA	3.1 VDC	0.20 VDC	Approx. 550 mW (at nominal voltage)	Approx. 250 mW max.	Approx. 50 deg (at nominal voltage)
FBR244G006/02□	FBR244NG006/02□	6 VDC	66 Ω	91 mA	4.0 VDC	0.27 VDC			
FBR244G009/02□	FBR244NG009/02□	9 VDC	140 Ω	64 mA	6.0 VDC	0.38 VDC			
FBR244G012/02□	FBR244NG012/02□	12 VDC	280 Ω	43 mA	8.1 VDC	0.55 VDC			
FBR244G024/02□	FBR244NG024/02□	24 VDC	1,050 Ω	23 mA	15.8 VDC	1.06 VDC			
FBR244G048/02□	FBR244NG048/02□	48 VDC	4,100 Ω	11 mA	30.5 VDC	2.12 VDC			


Note: All values in the table are measured at 20°C.

CHARACTERISTIC DATA


Range of operation temperature and voltage
[Standard 0.5 W type]

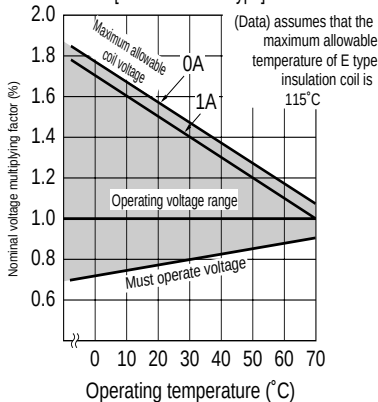




Range of operation temperature and voltage
[G type 0.55 W type]

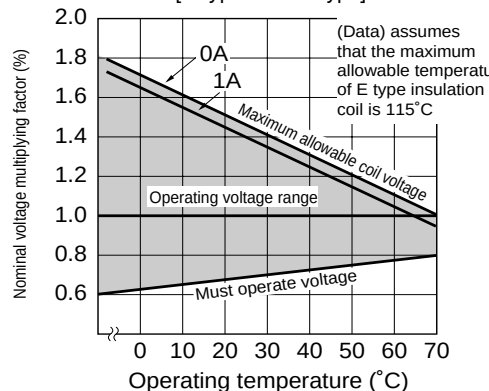




Operate time

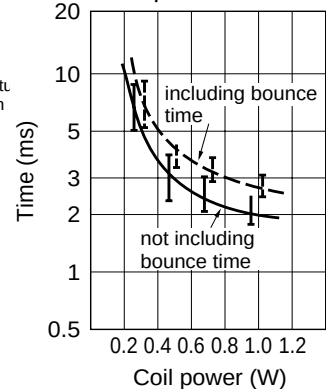

FBR244 SERIES

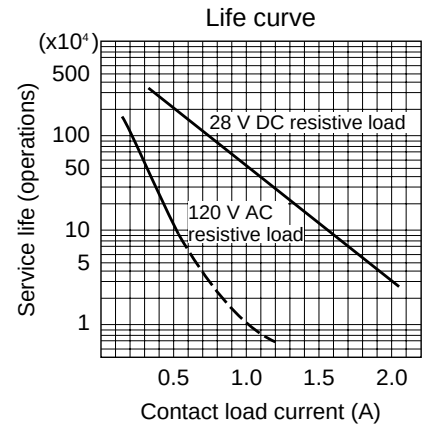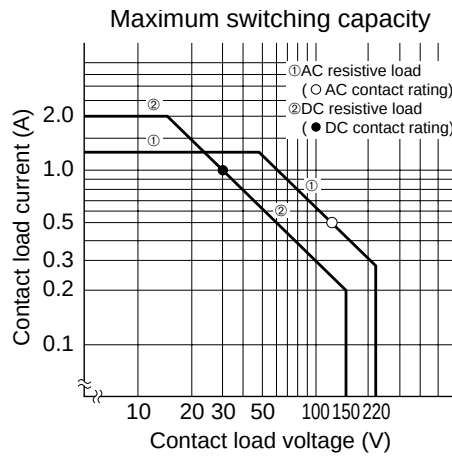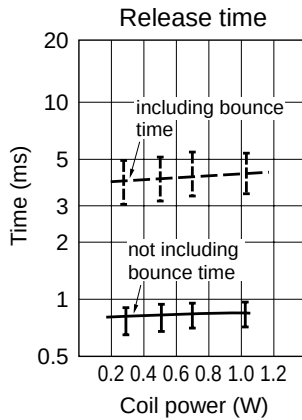


REFERENCE DATA

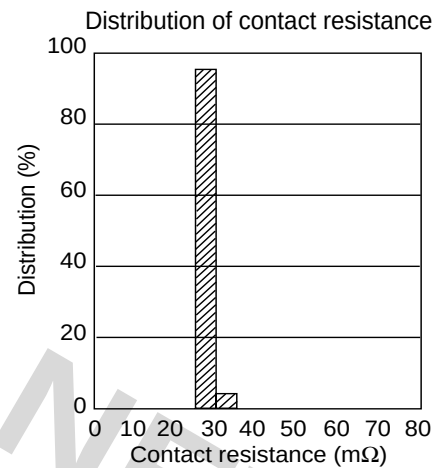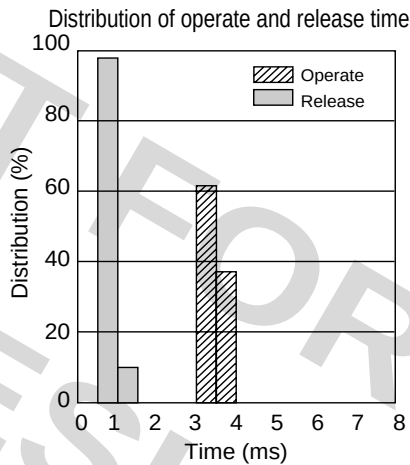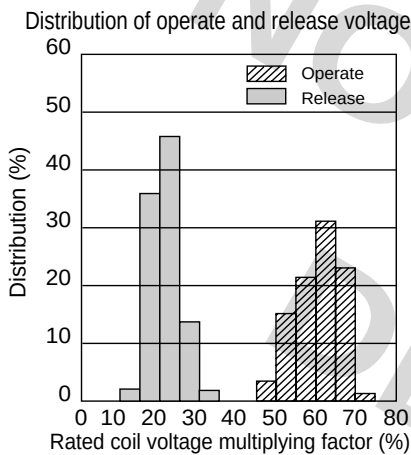


DIMENSIONS


Dimensions

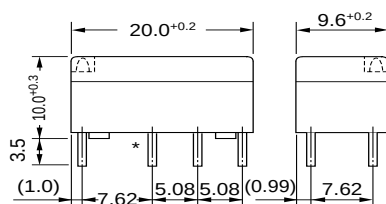

Schematic (BOTTOM VIEW)




PC board mounting hole layout (BOTTOM VIEW)



*:The terminals marked with an asterisk are kinked for temporary mounting on PC board.

Tube carrier

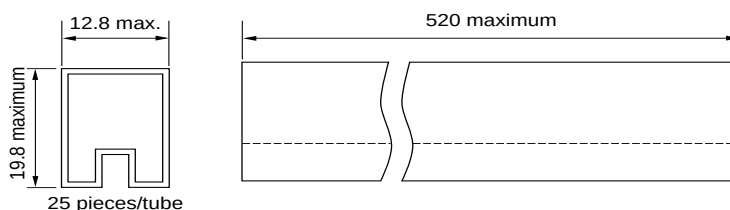

Unit: mm

**Fujitsu Takamisawa
International
Headquarter
Offices**

www.fujitsu.takamisawa.com

Japan

Fujitsu Takamisawa Component Limited
Global Marketing and Sales
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626

North and South America

Fujitsu Takamisawa America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970

Europe

Fujitsu Takamisawa Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950

Asia Pacific

Fujitsu Takamisawa Asia Pacific Pte. Ltd.
102E Pasir Panjang Road
#04-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 375-8560
Fax: (65) 273-3021

NOT FOR NEW
DESIGNS