

NPN general purpose Transistor

BC846/847/848


FEATURES

- High current gain.
- Excellent h_{FE} linearity .
- Low noise between 30Hz and 15kHz.
- For AF input stages and driver applications.



APPLICATIONS

- General purpose switching and amplification.

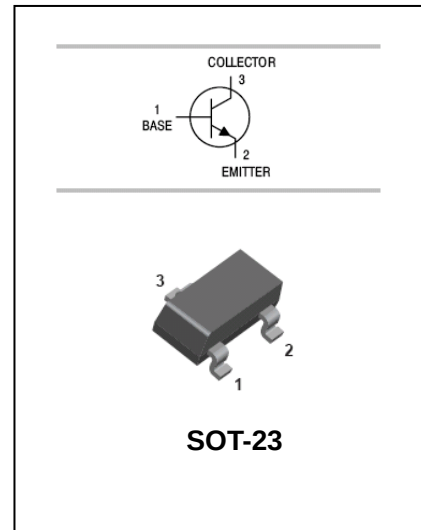

ORDERING INFORMATION

Type No.	Marking	Package Code
BC846A/B	1A/1B	SOT-23
BC847A/B/C	1E/1F/1G	SOT-23
BC848A/B/C	1J/1K/1L	SOT-23

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	BC846 80	V
		BC847 50	
		BC848 30	
V_{CEO}	Collector-Emitter Voltage	BC846 65	V
		BC847 45	
		BC848 30	
V_{EBO}	Emitter-Base Voltage	BC846 6	V
		BC847 6	
		BC848 5	
I_C	Collector Current -Continuous	0.1	A
P_C	Collector Dissipation	200	mW
T_j, T_{stg}	Junction and Storage Temperature	-65~150	°C







NPN general purpose Transistor**BC846/847/848****ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified**

Parameter		Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	BC846	$V_{(BR)CBO}$	$I_C=10\mu A, I_E=0$	80			V
	BC847			50			
	BC848			30			
Collector-emitter breakdown voltage	BC846	$V_{(BR)CEO}$	$I_C=10mA, I_B=0$	65			V
	BC847			45			
	BC848			30			
Emitter-base breakdown voltage	BC846	$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	6			V
	BC847			6			
	BC848			5			
Collector cut-off current	BC846	I_{CBO}	$V_{CB}=70V, I_E=0$			0.1	μA
	BC847		$V_{CB}=50V, I_E=0$				
	BC848		$V_{CB}=30V, I_E=0$				
Collector cut-off current	BC846	I_{CEO}	$V_{CE}=60V, I_B=0$			0.1	μA
	BC847		$V_{CE}=45V, I_B=0$				
	BC848		$V_{CE}=30V, I_B=0$				
Emitter cut-off current		I_{EBO}	$V_{EB}=5V, I_C=0$			0.1	μA
DC current gain	BC846A,847A,848A	h_{FE}	$V_{CE}=5V, I_C=2mA$	110		220	
	BC846B,847B,848B			200		450	
	BC846C,847C,848C			420		800	
Collector-emitter saturation voltage		$V_{CE(sat)}$	$I_C=100mA, I_B=5mA$			0.5	V
Base-emitter saturation voltage		$V_{BE(sat)}$	$I_C=100mA, I_B=5mA$			1.1	V
Transition frequency		f_T	$V_{CE}=5V, I_C=10mA$ $f=100MHz$	100			MHz

NPN general purpose Transistor

BC846/847/848

TYPICAL CHARACTERISTICS @ $T_A = 25^\circ\text{C}$ unless otherwise specified

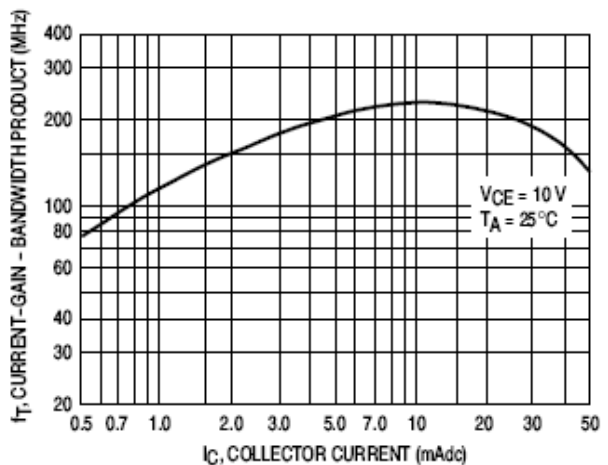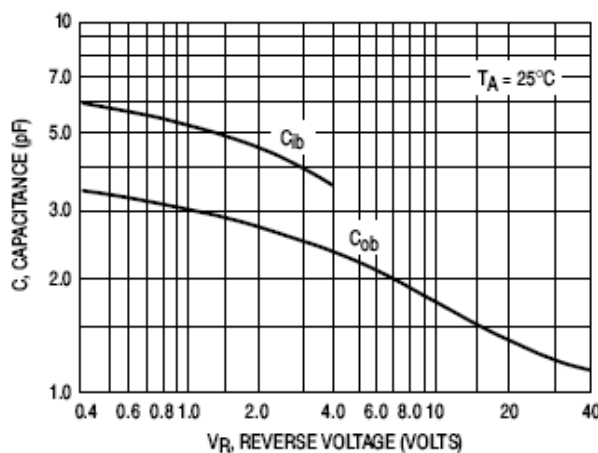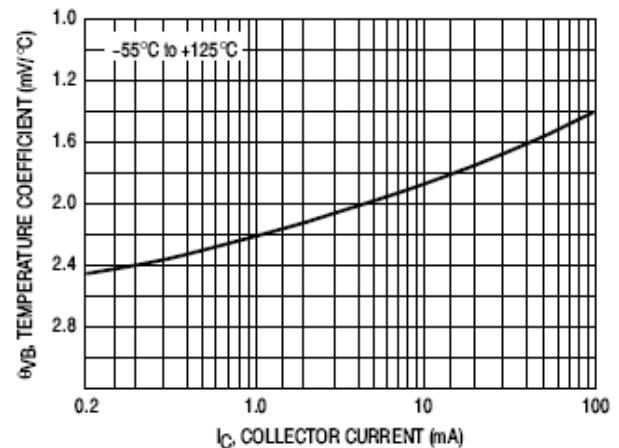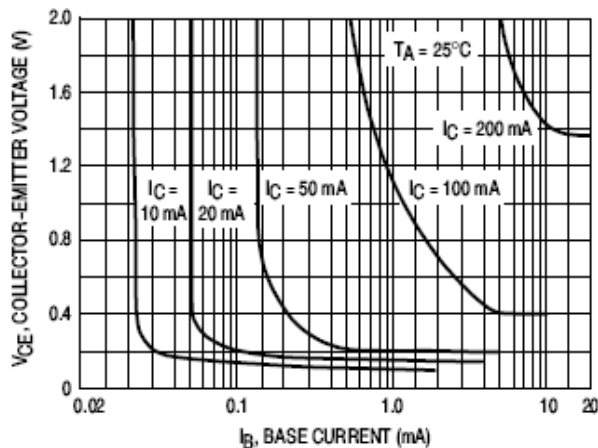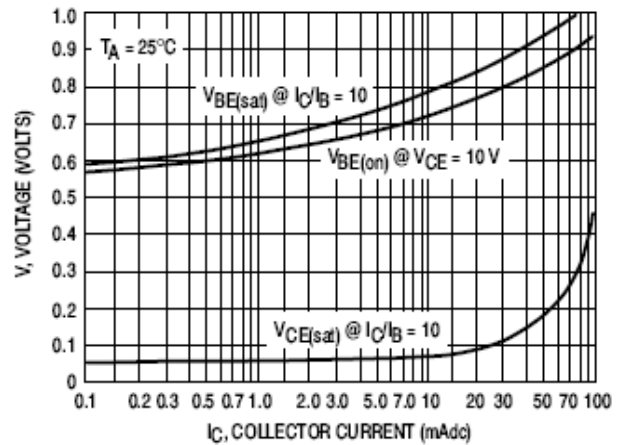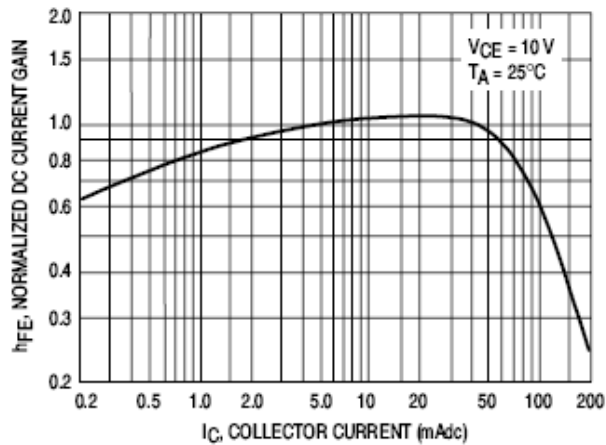


NPN general purpose Transistor

BC846/847/848


PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

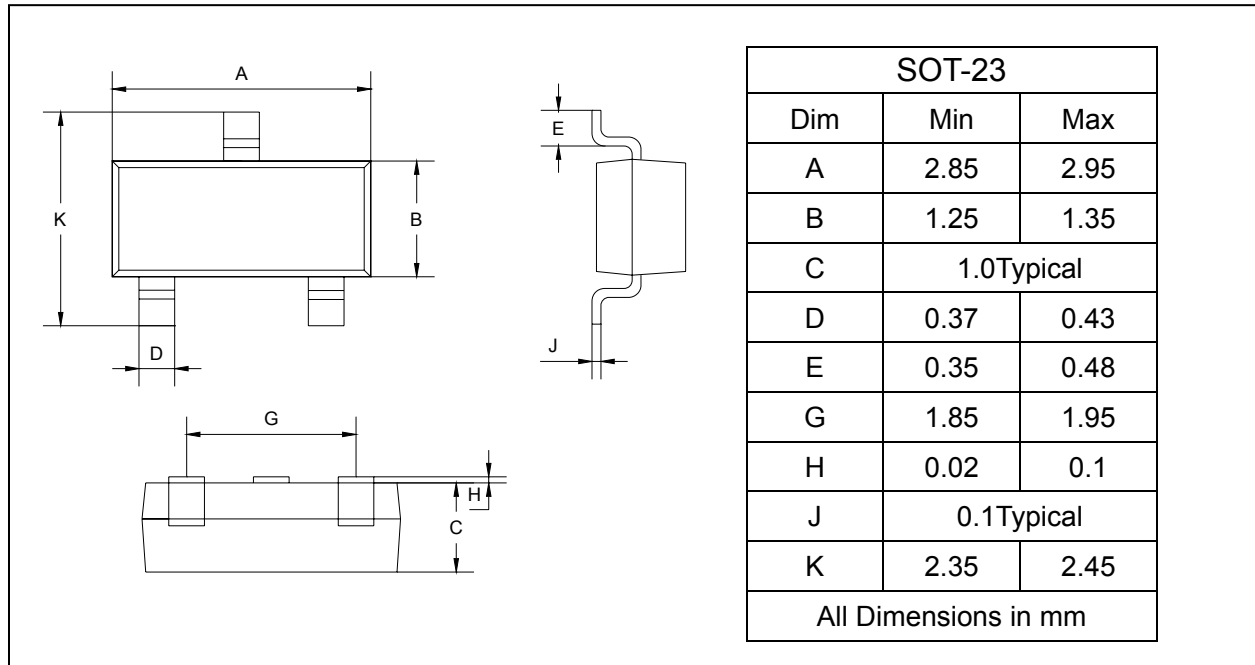

SOLDERING FOOTPRINT

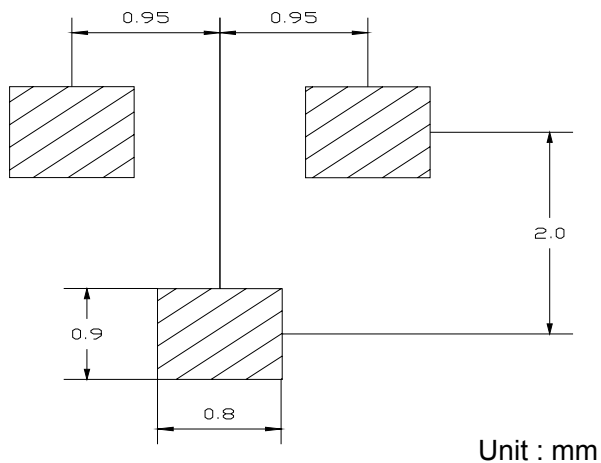

PACKAGE INFORMATION

Device	Package	Shipping
BC846/847/848	SOT-23	3000/Tape&Reel