

### **SOT-23 SURFACE MOUNT LED LAMP**

Part Number: AM23YC-F Yellow


### **Features**

- SOT-23 PACKAGE SURFACE MOUNT LED LAMP.
- LOW POWER CONSUMPTION.
- LONG LIFE SOLID STATE RELIABILITY.
- PACKAGE: 2000PCS / REEL.
- MOISTURE SENSITIVITY LEVEL: LEVEL 3.
- RoHS COMPLIANT.


## Description


The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

## **Package Dimensions**



- 1 ANODE
- 2 N.C.
- 3 CATHODE





### Notes:

- All dimensions are in millimeters (inches).
   Tolerance is ±0.25(0.01") unless otherwise noted.
- 3. Lead spacing is measured where the lead emerge from the package.
- 4. Specifications are subject to change without notice.
- 5.The device has a single mounting surface. The device must be mounted according to the specifications.





SPEC NO: DSAD0939 **REV NO: V.5 DATE: MAY/08/2007** PAGE: 1 OF 5 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: Y.L.LI ERP: 1202000108

## **Selection Guide**

Part No.	Dice	Lens Type	lv (mcd) [2] @ 20mA		Viewing Angle [1]
			Min.	Тур.	201/2
AM23YC-F	Yellow (GaAsP/GaP)	WATER CLEAR	1.6	5	140°

- 1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value. 2. Luminous intensity/ luminous Flux: +/-15%.

## Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions	
λpeak	Peak Wavelength	Yellow	590		nm	IF=20mA	
λD [1]	Dominant Wavelength	Yellow	588		nm	IF=20mA	
Δλ1/2	Spectral Line Half-width	Yellow	35		nm	IF=20mA	
С	Capacitance	Yellow	20		pF	V <sub>F</sub> =0V;f=1MHz	
VF [2]	Forward Voltage	Yellow	2.1	2.5	V	IF=20mA	
lR	Reverse Current	Yellow		10	uA	V <sub>R</sub> =5V	

1.Wavelength: +/-1nm. 2. Forward Voltage: +/-0.1V.


## Absolute Maximum Ratings at TA=25°C

Yellow						
75	mW					
30	mA					
140	mA					
5	V					
-40°C To +85°C						
-40°C To +85°C						
	75 30 140 5 -40°C To +85°C					

## Note:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

SPEC NO: DSAD0939 **REV NO: V.5** DATE: MAY/08/2007 PAGE: 2 OF 5 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: Y.L.LI ERP: 1202000108

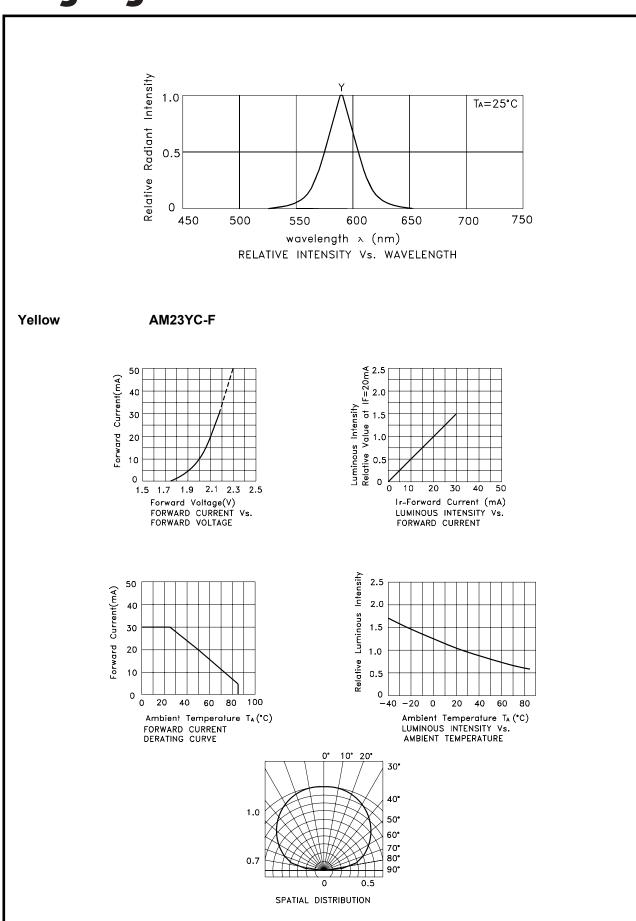


 SPEC NO: DSAD0939
 REV NO: V.5
 DATE: MAY/08/2007
 PAGE: 3 OF 5

 APPROVED: WYNEC
 CHECKED: Allen Liu
 DRAWN: Y.L.LI
 ERP: 1202000108

## AM23YC-F


Reflow Soldering Profile For Lead-free SMT Process.

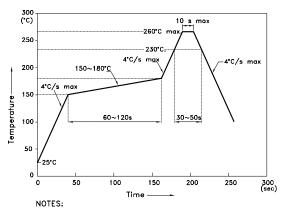


- NOTES:

  1.We recommend the reflow temperature 245°C(+/-5°C).The maximum soldering temperature should be limited to 260°C. 2.Don't cause stress to the epoxy resin while it is exposed to high temperature.
   3.Number of reflow process shall be 2 times or less.

## **Recommended Soldering Pattern** (Units: mm; Tolerance: ± 0.1)



## **Tape Specifications** (Units: mm)

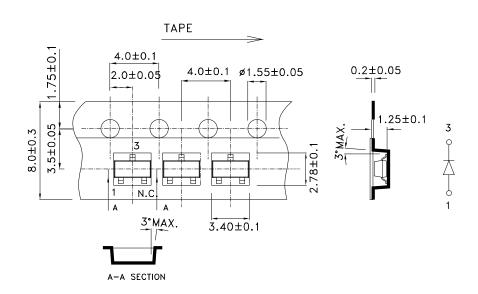


SPEC NO: DSAD0939 APPROVED: WYNEC

**REV NO: V.5 CHECKED: Allen Liu**  **DATE: MAY/08/2007** DRAWN: Y.L.LI

PAGE: 4 OF 5

ERP: 1202000108

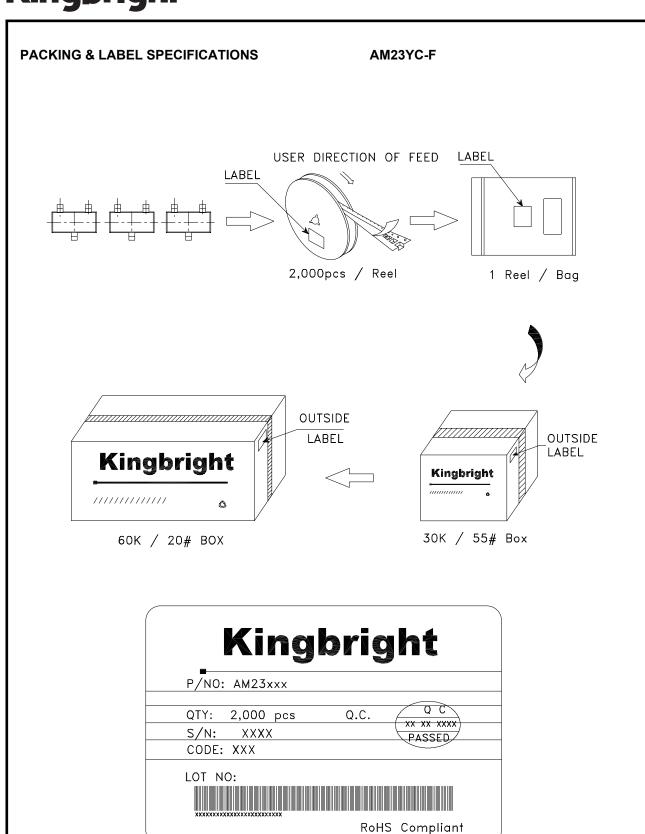

SPEC NO: DSAD0939 APPROVED: WYNEC REV NO: V.5 CHECKED: Allen Liu DATE: MAY/08/2007 DRAWN: Y.L.LI PAGE: 5 OF 5 ERP: 1202000108