

# Kingbright®


## T-1 3/4 (5mm) RIGHT ANGLE LED INDICATORS

L-1503CB/1I HIGH EFFICIENCY RED  
L-1503CB/1G GREEN  
L-1503CB/1Y YELLOW  
L-1503CB/1SR SUPER BRIGHT RED

### Features

- PRE-TRIMMED LEADS FOR PC BOARD MOUNTING.
- I.C. COMPATIBLE.
- BLACK CASE ENHANCES CONTRAST RATIO.
- WIDE VIEWING ANGLE.
- HIGH RELIABILITY - LIFE MEASURED IN YEARS.

### Package Dimensions

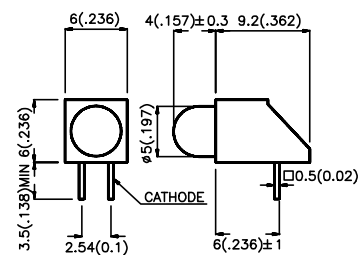

### Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

The High Efficiency Red source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

The Super Bright Red source color devices are made with Gallium Aluminum Arsenide Red Light Emitting Diode.

- Notes:
1. All dimensions are in millimeters (inches).
  2. Tolerance is  $\pm 0.25(0.01")$  unless otherwise noted.
  3. Lead spacing is measured where the lead emerge package.
  4. Specifications are subjected to change without notice.

### Selection Guide

| Part No.      | Dice                            | Lens Type       | Iv (mcd)<br>@ 10 mA |      | Viewing<br>Angle<br>2 $\theta$ 1/2 |
|---------------|---------------------------------|-----------------|---------------------|------|------------------------------------|
|               |                                 |                 | Min.                | Max. |                                    |
| L-1503CB/1ID  | HIGH EFFICIENCY RED (GaAsP/GaP) | RED DIFFUSED    | 12.5                | 80   | 60°                                |
| L-1503CB/1GD  | GREEN (GaP)                     | GREEN DIFFUSED  | 5                   | 32   | 60°                                |
| L-1503CB/1YD  | YELLOW (GaAsP/GaP)              | YELLOW DIFFUSED | 5                   | 32   | 60°                                |
| L-1503CB/1SRD | SUPER BRIGHT RED (GaAlAs)       | RED DIFFUSED    | *100                | *500 | 60°                                |

- Notes:
1.  $\theta$ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
  2. \*Luminous intensity with asterisk is measured at 20 mA.

### Electrical / Optical Characteristics at T<sub>A</sub>=25°C

| Symbol                  | Parameter               | Device                                                     | Typ.                      | Max.                     | Units | Test Conditions |
|-------------------------|-------------------------|------------------------------------------------------------|---------------------------|--------------------------|-------|-----------------|
| $\lambda_{\text{peak}}$ | Peak Wavelength         | High Efficiency Red<br>Green<br>Yellow<br>Super Bright Red | 625<br>565<br>590<br>660  |                          | nm    | IF=20mA         |
| $\Delta\lambda_{1/2}$   | Spectral Line Halfwidth | High Efficiency Red<br>Green<br>Yellow<br>Super Bright Red | 45<br>30<br>35<br>20      |                          | nm    | IF=20mA         |
| C                       | Capacitance             | High Efficiency Red<br>Green<br>Yellow<br>Super Bright Red | 12<br>45<br>10<br>95      |                          | pF    | VF=0V;f=1MHz    |
| V <sub>F</sub>          | Forward Voltage         | High Efficiency Red<br>Green<br>Yellow<br>Super Bright Red | 2.0<br>2.2<br>2.1<br>1.85 | 2.5<br>2.5<br>2.5<br>2.5 | V     | IF=20mA         |
| I <sub>R</sub>          | Reverse Current         | All                                                        | 10                        |                          | uA    | VR = 5V         |


### Absolute Maximum Ratings at T<sub>A</sub>=25°C

| Parameter                      | High Efficiency Red  | Green | Yellow | Super Bright Red | Units |
|--------------------------------|----------------------|-------|--------|------------------|-------|
| Power dissipation              | 105                  | 105   | 105    | 100              | mW    |
| DC Forward Current             | 30                   | 25    | 30     | 30               | mA    |
| Peak Forward Current [1]       | 150                  | 150   | 150    | 150              | mA    |
| Reverse Voltage                | 5                    | 5     | 5      | 5                | V     |
| Operating/Storage Temperature  | -40°C To +85 °C      |       |        |                  |       |
| Lead Soldering Temperature [2] | 260 °C For 5 Seconds |       |        |                  |       |


Notes:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.


2. 4mm below package base.

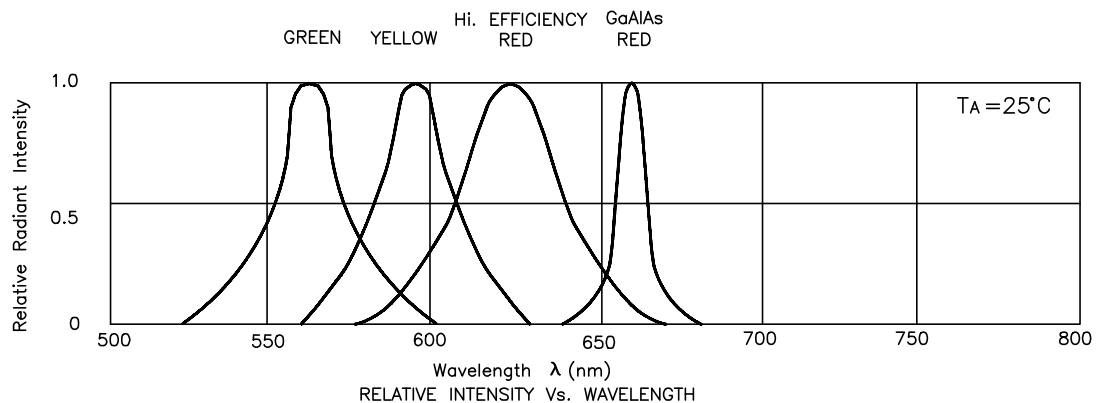


## High Efficiency Red L-1503CB/1ID




FORWARD CURRENT Vs. FORWARD VOLTAGE



FORWARD CURRENT DERATING CURVE

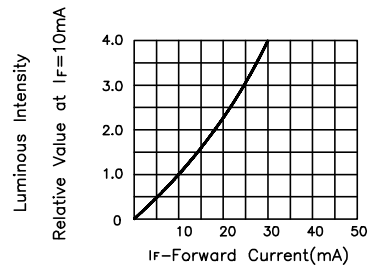


LUMINOUS INTENSITY Vs. FORWARD CURRENT




SPATIAL DISTRIBUTION


## Green L-1503CB/1GD




FORWARD CURRENT Vs. FORWARD VOLTAGE



FORWARD CURRENT DERATING CURVE

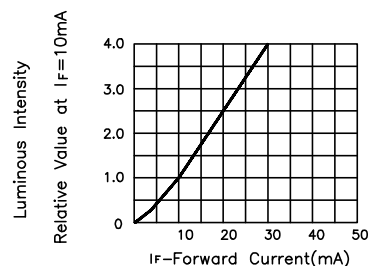


LUMINOUS INTENSITY Vs. FORWARD CURRENT




SPATIAL DISTRIBUTION


## Yellow L-1503CB/1YD




FORWARD CURRENT Vs. FORWARD VOLTAGE

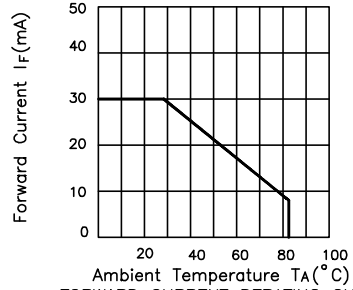

FORWARD CURRENT DERATING CURVE

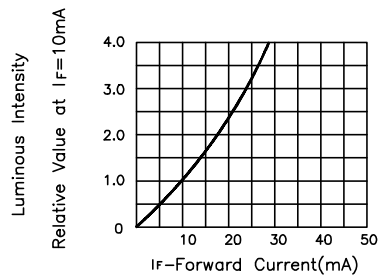


LUMINOUS INTENSITY Vs. FORWARD CURRENT




SPATIAL DISTRIBUTION


## Super Bright Red L-1503CB/1SRD




FORWARD CURRENT Vs. FORWARD VOLTAGE

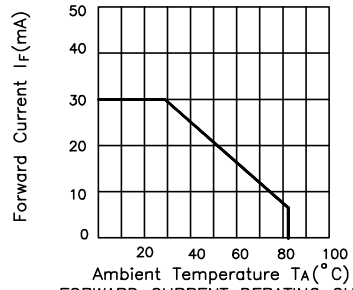

FORWARD CURRENT DERATING CURVE

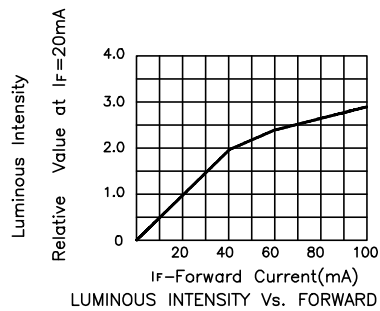

LUMINOUS INTENSITY Vs. FORWARD CURRENT



SPATIAL DISTRIBUTION