



30CPU04PbF

## ULTRAFAST RECTIFIER

## Features

- Ultrafast Recovery Time
- Low Forward Voltage Drop
- Low Leakage Current
- 175°C Operating Junction Temperature
- Lead-Free

$$t_{rr} = 60\text{ns}$$

$$I_{F(AV)} = 30\text{Amp}$$

$$V_R = 400\text{V}$$

## Description/ Applications

International Rectifier's FRED.. series are the state of the art Ultra fast recovery rectifiers specifically designed with optimized performance of forward voltage drop and ultra fast recovery time.

The planar structure and the platinum doped life time control, guarantee the best overall performance, ruggedness and reliability characteristics.

These devices are intended for use in the output rectification stage of SMPS, UPS, DC-DC converters as well as free-wheeling diode in low voltage inverters and chopper motor drives.

Their extremely optimized stored charge and low recovery current minimize the switching losses and reduce over dissipation in the switching element and snubbers.

## Absolute Maximum Ratings


| Parameters                                                        | Max         | Units            |
|-------------------------------------------------------------------|-------------|------------------|
| $V_{RRM}$ Peak Repetitive Peak Reverse Voltage                    | 400         | V                |
| $I_{F(AV)}$ Average Rectified Forward Current                     | 15          | A                |
| Per Leg                                                           |             |                  |
| Total Device (Rated $V_R$ ), $T_C = 149^\circ\text{C}$            | 30          |                  |
| Total Device                                                      | 30          |                  |
| $I_{FSM}$ Non Repetitive Peak Surge Current, @ $25^\circ\text{C}$ | 200         | A                |
| Per Leg                                                           |             |                  |
| $I_{FRM}$ Peak Repetitive Forward Current                         | 30          | A                |
| Per Leg                                                           |             |                  |
| (Rated $V_R$ , Square wave, 20 KHz), $T_C = 149^\circ\text{C}$    |             |                  |
| $T_J, T_{STG}$ Operating Junction and Storage Temperatures        | - 65 to 175 | $^\circ\text{C}$ |

## Case Styles

30CPU04PbF



TO247AC



**Electrical Characteristics @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**

| Parameters                                        | Min | Typ  | Max  | Units         | Test Conditions                                    |
|---------------------------------------------------|-----|------|------|---------------|----------------------------------------------------|
| $V_{BR}, V_r$ Breakdown Voltage, Blocking Voltage | 400 | -    | -    | V             | $I_R = 100\mu\text{A}$                             |
| $V_F$ Forward Voltage                             | -   | 1.17 | 1.25 | V             | $I_F = 15\text{A}$                                 |
|                                                   | -   | 0.93 | 1.12 | V             | $I_F = 15\text{A}, T_J = 150^\circ\text{C}$        |
| $I_R$ Reverse Leakage Current                     | -   | 0.3  | 10   | $\mu\text{A}$ | $V_R = V_R \text{ Rated}$                          |
|                                                   | -   | 30   | 500  | $\mu\text{A}$ | $T_J = 150^\circ\text{C}, V_R = V_R \text{ Rated}$ |
| $C_T$ Junction Capacitance                        | -   | 28   | -    | pF            | $V_R = 400\text{V}$                                |
| $L_S$ Series Inductance                           | -   | 12   | -    | nH            | Measured lead to lead 5mm from package body        |

**Dynamic Recovery Characteristics @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**

| Parameters                       | Min | Typ | Max | Units | Test Conditions                                                         |
|----------------------------------|-----|-----|-----|-------|-------------------------------------------------------------------------|
| $t_{rr}$ Reverse Recovery Time   | -   | 36  | 60  | ns    | $I_F = 1.0\text{A}, di_F/dt = 50\text{A}/\mu\text{s}, V_R = 30\text{V}$ |
|                                  | -   | 46  | -   |       | $T_J = 25^\circ\text{C}$                                                |
|                                  | -   | 80  | -   |       | $T_J = 125^\circ\text{C}$                                               |
| $I_{RRM}$ Peak Recovery Current  | -   | 3.6 | -   | A     | $T_J = 25^\circ\text{C}$                                                |
|                                  | -   | 8.7 | -   |       | $T_J = 125^\circ\text{C}$                                               |
| $Q_{rr}$ Reverse Recovery Charge | -   | 84  | -   | nC    | $T_J = 25^\circ\text{C}$                                                |
|                                  | -   | -   | 345 |       | $T_J = 125^\circ\text{C}$                                               |

$I_F = 15\text{A}$   
 $V_R = 200\text{V}$   
 $di_F/dt = 200\text{A}/\mu\text{s}$

**Thermal - Mechanical Characteristics**

| Parameters                                                   | Min  | Typ  | Max | Units                     |
|--------------------------------------------------------------|------|------|-----|---------------------------|
| $T_J$ Max. Junction Temperature Range                        | -    | -    | 175 | $^\circ\text{C}$          |
| $T_{Stg}$ Max. Storage Temperature Range                     | - 65 | -    | 175 |                           |
| $R_{thJC}$ Thermal Resistance, Junction to Case Per Leg      | -    | 0.8  | 1.5 | $^\circ\text{C}/\text{W}$ |
| $R_{thJA}$ ① Thermal Resistance, Junction to Ambient Per Leg | -    | -    | 40  |                           |
| $R_{thCS}$ ② Thermal Resistance, Case to Heatsink            | -    | 0.4  | -   |                           |
| $Wt$ Weight                                                  | -    | 6.0  | -   | g                         |
|                                                              | -    | 0.21 | -   | (oz)                      |
| Mounting Torque                                              | 6.0  | -    | 12  | Kg-cm                     |
|                                                              | 5.0  | -    | 10  | lbf.in                    |

① Typical Socket Mount

② Mounting Surface, Flat, Smooth and Greased

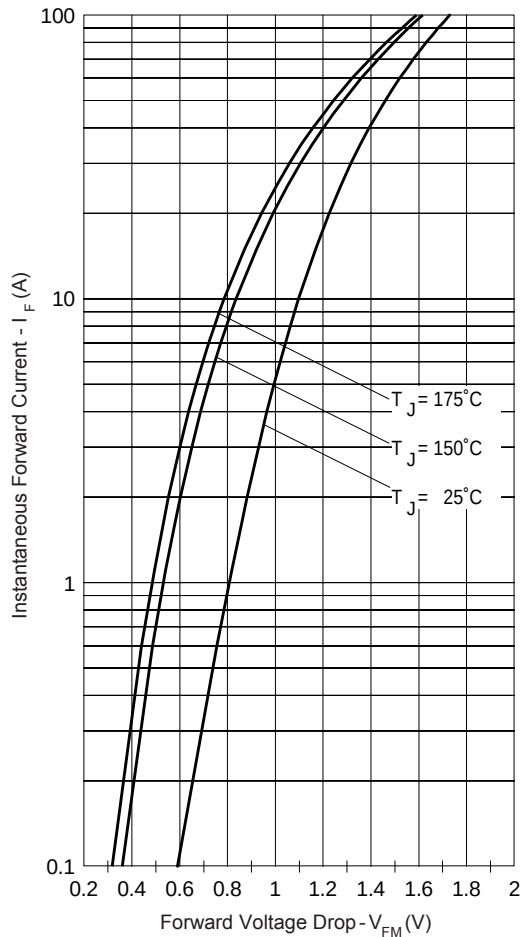


Fig. 1 - Typical Forward Voltage Drop Characteristics

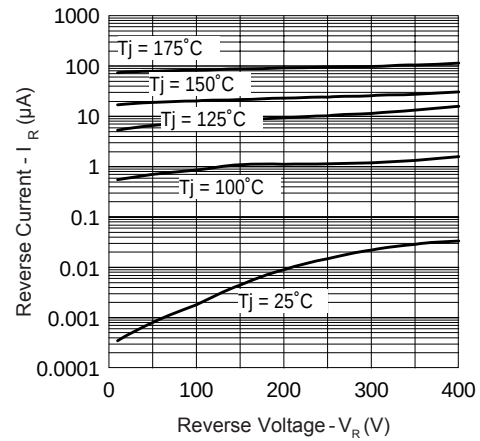


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage

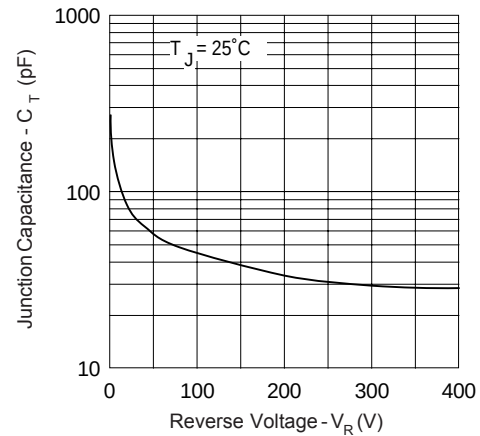


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage



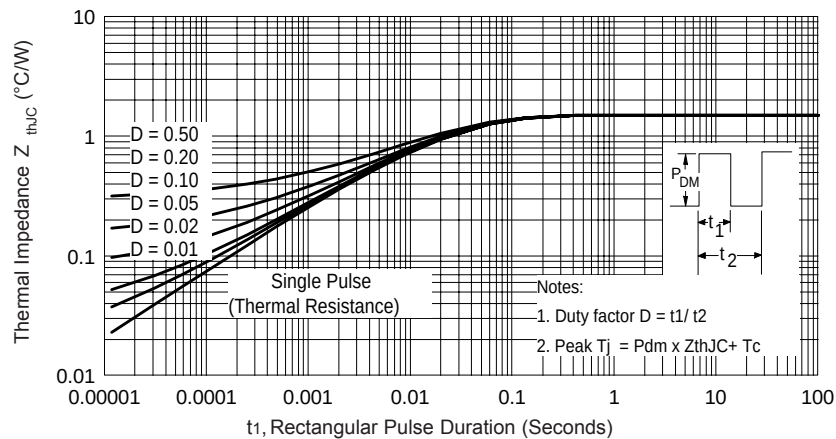



Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics

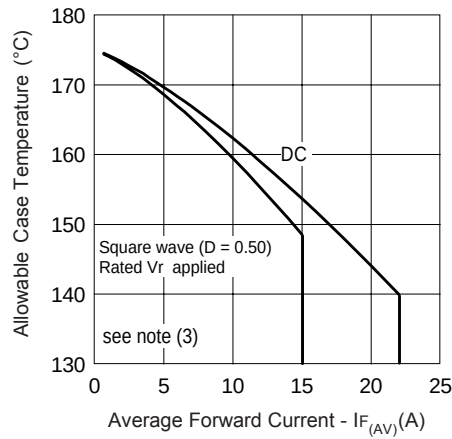


**Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current**

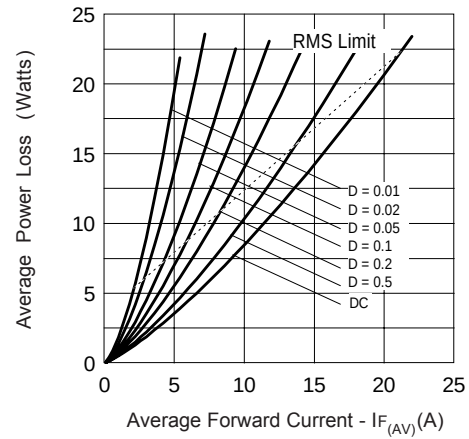

**Fig. 6 - Forward Power Loss Characteristics**

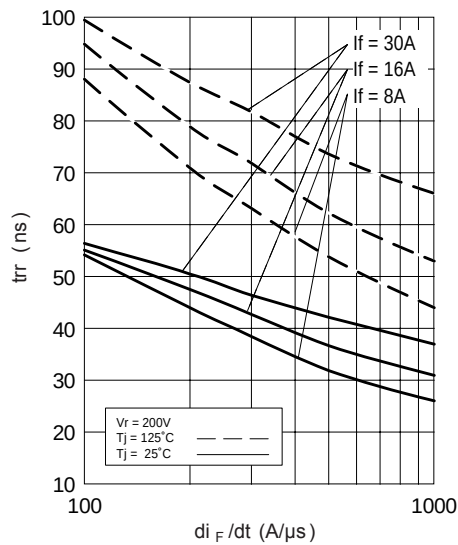

**Fig. 7 - Typical Reverse Recovery vs.  $di_F/dt$**

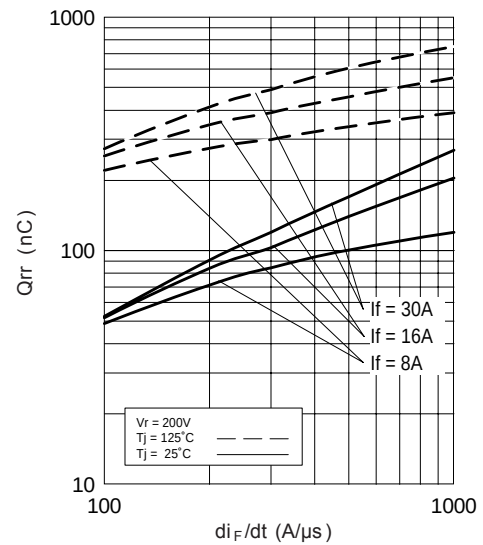

**Fig. 8 - Typical Stored Charge vs.  $di_F/dt$**

(3) Formula used:  $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$ ;

$P_d$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);

$P_{d_{REV}}$  = Inverse Power Loss =  $V_{R1} \times I_{R1} (1 - D)$ ;  $I_{R1} @ V_{R1}$  = rated  $V_{R1}$

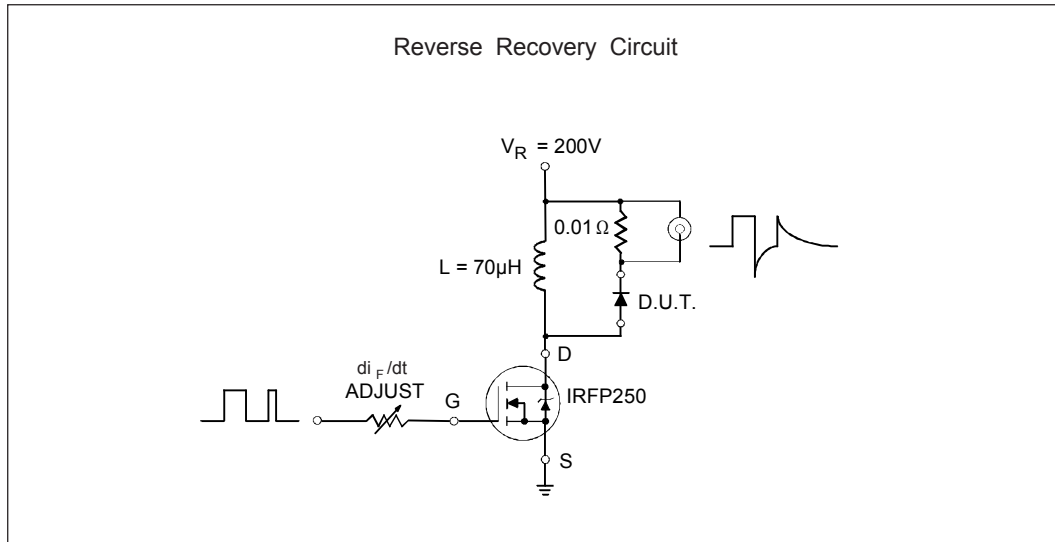


Fig. 9- Reverse Recovery Parameter Test Circuit



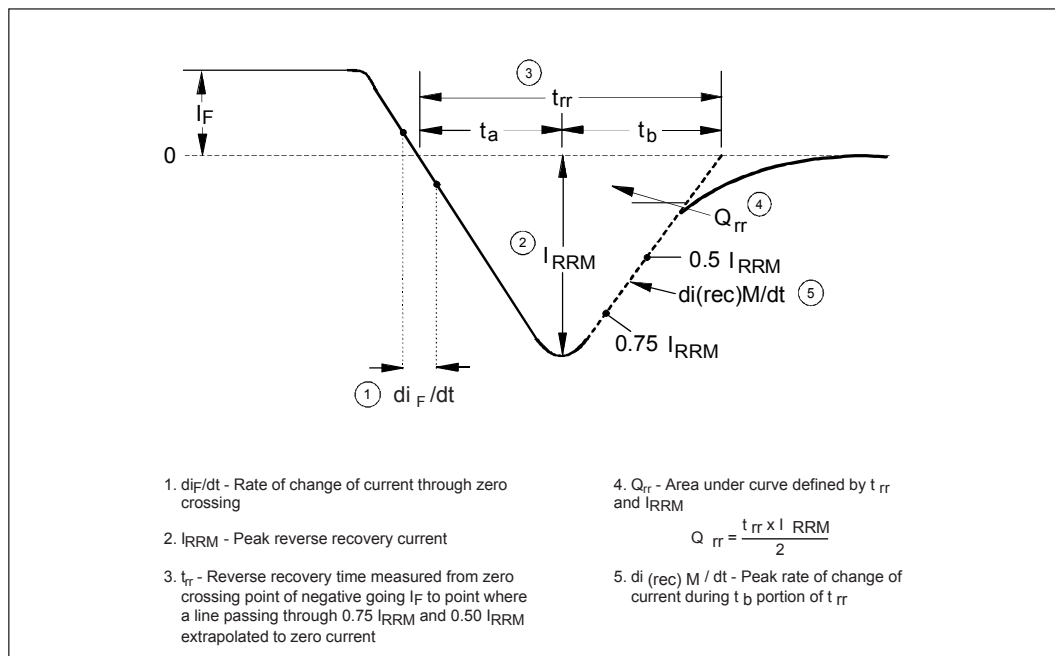


Fig. 10 - Reverse Recovery Waveform and Definitions

Outline Table

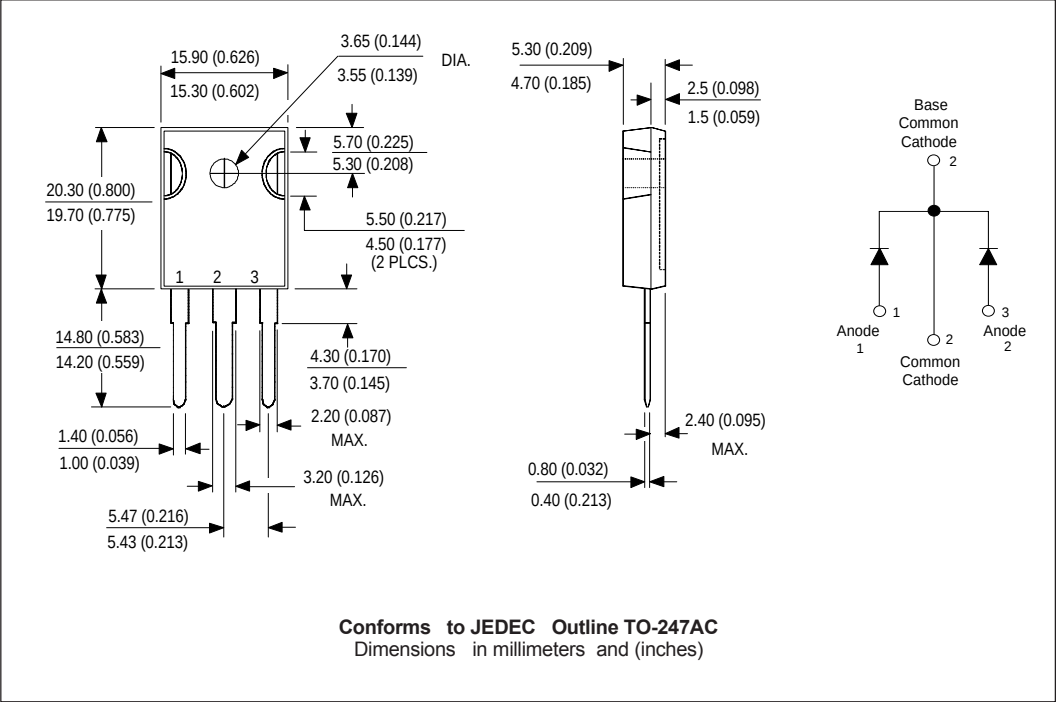

Marking Information

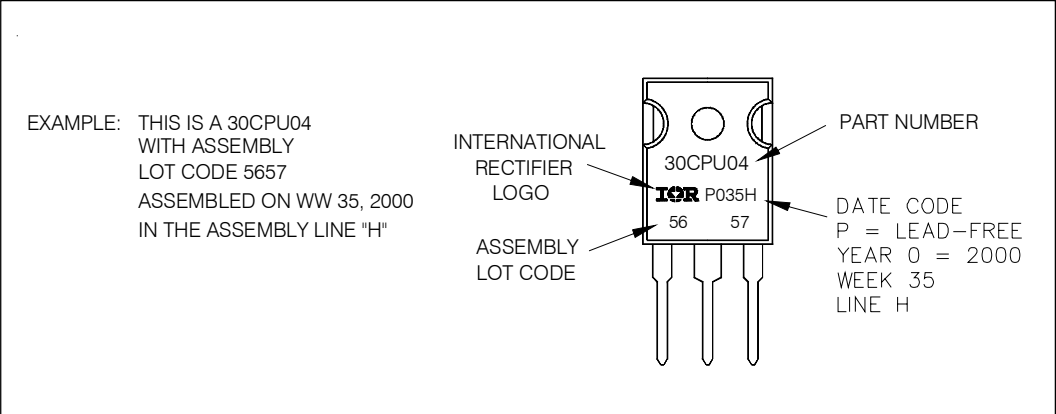

## Ordering Information Table

| Device Code |    |                    |             |   |        |
|-------------|----|--------------------|-------------|---|--------|
|             | 30 | C                  | P           | U | 04 PbF |
|             | ①  | ②                  | ③           | ④ | ⑤ ⑥    |
| 1           | -  | Current Rating     | (30 = 30A)  |   |        |
| 2           | -  | Common Cathode     |             |   |        |
| 3           | -  | TO-247AC           |             |   |        |
| 4           | -  | Ultrafast Recovery |             |   |        |
| 5           | -  | Voltage Rating     | (04 = 400V) |   |        |
| 6           | -  | Lead-Free          |             |   |        |

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105

TAC Fax: (310) 252-7309

Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 04/04