

International  
**IOR** Rectifier

30CPQ035PbF  
30CPQ040PbF  
30CPQ045PbF

SCHOTTKY RECTIFIER

30 Amp

$$I_{F(AV)} = 30\text{Amp}$$

$$V_R = 35/45\text{V}$$

#### Major Ratings and Characteristics

| Characteristics                                 | Values     | Units            |
|-------------------------------------------------|------------|------------------|
| $I_{F(AV)}$ Rectangular waveform                | 30         | A                |
| $V_{RRM}$                                       | 35/45      | V                |
| $I_{FSM}$ @tp=5μs sine                          | 1020       | A                |
| $V_F$ @15Apk, $T_J=125^\circ\text{C}$ (per leg) | 0.50       | V                |
| $T_J$                                           | -55 to 150 | $^\circ\text{C}$ |

#### Description/ Features


The 30CPQ...PbF center tap Schottky rectifier has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to  $150^\circ\text{C}$  junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- $150^\circ\text{C}$   $T_J$  operation
- Center tap TO-247 package
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free ("PbF" suffix)

#### Case Styles



TO-247AC



## Voltage Ratings

| Part number                                     | 30CPQ035PbF | 30CPQ040PbF | 30CPQ045PbF |
|-------------------------------------------------|-------------|-------------|-------------|
| $V_R$ Max. DC Reverse Voltage (V)               | 35          | 40          | 45          |
| $V_{RWM}$ Max. Working Peak Reverse Voltage (V) |             |             |             |

## Absolute Maximum Ratings

| Parameters  |                                                                         | 30CPQ... | Units | Conditions                                                                                                               |                                                                     |  |
|-------------|-------------------------------------------------------------------------|----------|-------|--------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|--|
| $I_{F(AV)}$ | Max. Average Forward Current<br>* See Fig. 5                            | 30       | A     | 50% duty cycle @ $T_C = 124^\circ\text{C}$ , rectangular wave form                                                       |                                                                     |  |
| $I_{FSM}$   | Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7 | 1020     | A     | 5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse                                                                      | Following any rated load condition and with rated $V_{RRM}$ applied |  |
|             |                                                                         | 265      |       | 10ms Sine or 6ms Rect. pulse                                                                                             |                                                                     |  |
| $E_{AS}$    | Non-Repetitive Avalanche Energy (Per Leg)                               | 20       | mJ    | $T_J = 25^\circ\text{C}$ , $I_{AS} = 3$ Amps, $L = 4.4$ mH                                                               |                                                                     |  |
| $I_{AR}$    | Repetitive Avalanche Current (Per Leg)                                  | 3        | A     | Current decaying linearly to zero in 1 $\mu\text{sec}$<br>Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical |                                                                     |  |

## Electrical Specifications

| Parameters      |                                                            | 30CPQ... | Units | Conditions                                                                |                                       |
|-----------------|------------------------------------------------------------|----------|-------|---------------------------------------------------------------------------|---------------------------------------|
| V <sub>FM</sub> | Max. Forward Voltage Drop<br>(Per Leg) * See Fig. 1 (1)    | 0.54     | V     | @ 15A                                                                     | T <sub>J</sub> = 25 °C                |
|                 |                                                            | 0.68     | V     | @ 30A                                                                     |                                       |
|                 |                                                            | 0.50     | V     | @ 15A                                                                     | T <sub>J</sub> = 125 °C               |
|                 |                                                            | 0.64     | V     | @ 30A                                                                     |                                       |
| I <sub>RM</sub> | Max. Reverse Leakage Current<br>(Per Leg) * See Fig. 2 (1) | 1.75     | mA    | T <sub>J</sub> = 25 °C                                                    | V <sub>R</sub> = rated V <sub>R</sub> |
|                 |                                                            | 70       | mA    | T <sub>J</sub> = 125 °C                                                   |                                       |
| C <sub>T</sub>  | Max. Junction Capacitance (Per Leg)                        | 900      | pF    | V <sub>R</sub> = 5V <sub>DC</sub> (test signal range 100Khz to 1Mhz) 25°C |                                       |
| L <sub>S</sub>  | Typical Series Inductance (Per Leg)                        | 7.5      | nH    | Measured lead to lead 5mm from package body                               |                                       |
| dv/dt           | Max. Voltage Rate of Change                                | 10000    | V/ μs | (Rated V <sub>R</sub> )                                                   |                                       |

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle <2%

## Thermal-Mechanical Specifications

| Parameters        |                                                        | 30CPQ...        | Units          | Conditions                            |
|-------------------|--------------------------------------------------------|-----------------|----------------|---------------------------------------|
| T <sub>J</sub>    | Max. Junction Temperature Range                        | -55 to 150      | °C             |                                       |
| T <sub>stg</sub>  | Max. Storage Temperature Range                         | -55 to 150      | °C             |                                       |
| R <sub>thJC</sub> | Max. Thermal Resistance Junction to Case (Per Leg)     | 2.20            | °C/W           | DC operation      * See Fig. 4        |
| R <sub>thJC</sub> | Max. Thermal Resistance Junction to Case (Per Package) | 1.10            | °C/W           | DC operation                          |
| R <sub>thCS</sub> | Typical Thermal Resistance, Case to Heatsink           | 0.24            | °C/W           | Mounting surface , smooth and greased |
| wt                | Approximate Weight                                     | 6 (0.21)        | g (oz.)        |                                       |
| T                 | Mounting Torque                                        | Min. 6 (5)      | Kg-cm (lbf-in) | Non-lubricated threads                |
|                   |                                                        | Max. 12 (10)    |                |                                       |
| Case Style        |                                                        | TO-247AC(TO-3P) |                | JEDEC                                 |
| Device Marking    |                                                        | 30CPQ035        |                |                                       |
|                   |                                                        | 30CPQ040        |                |                                       |
|                   |                                                        | 30CPQ045        |                |                                       |

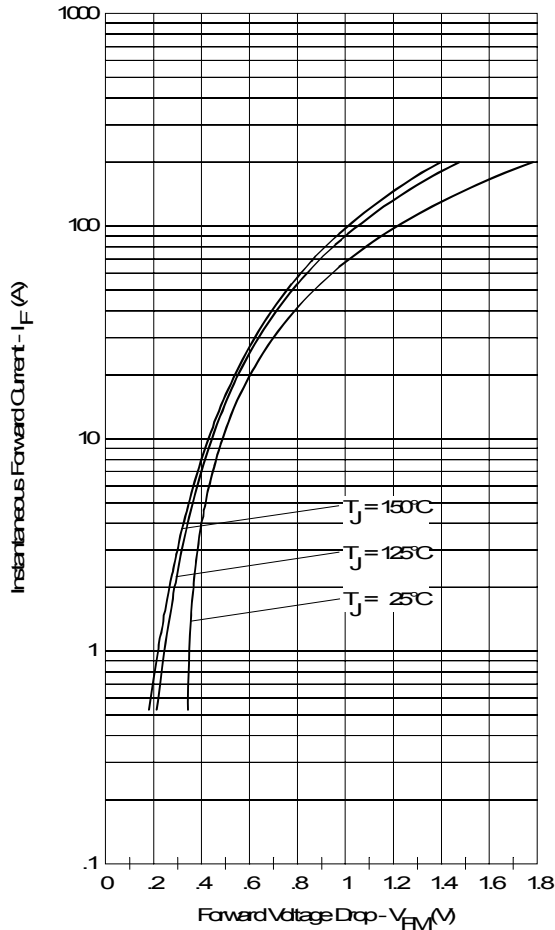


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

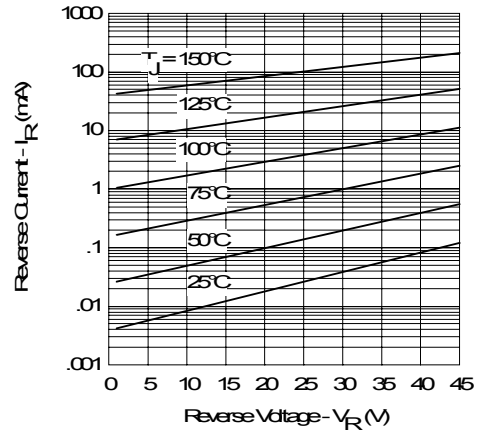


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

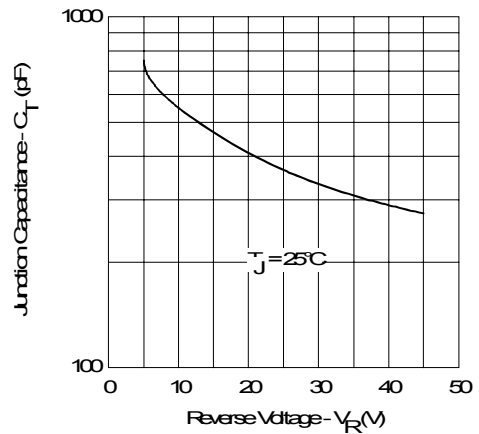


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

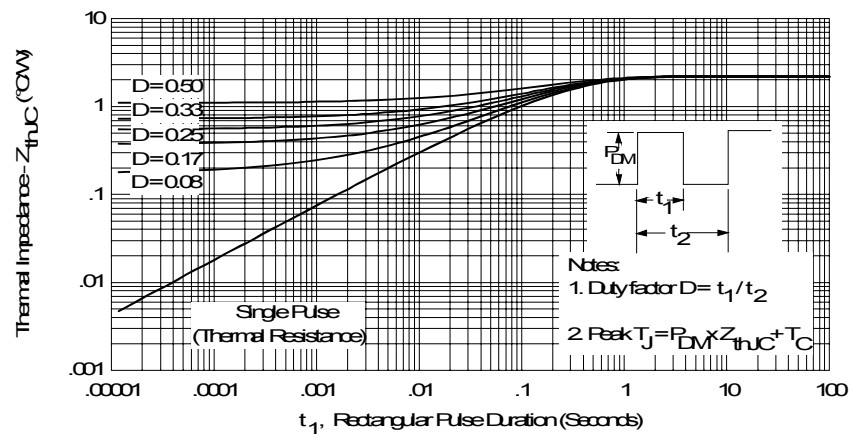


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

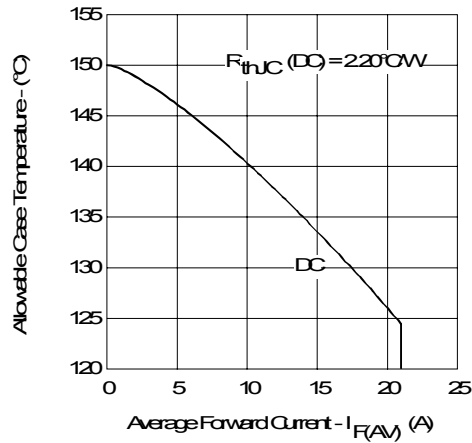


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

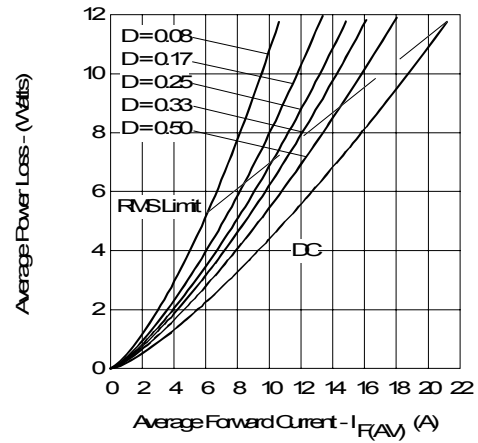


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

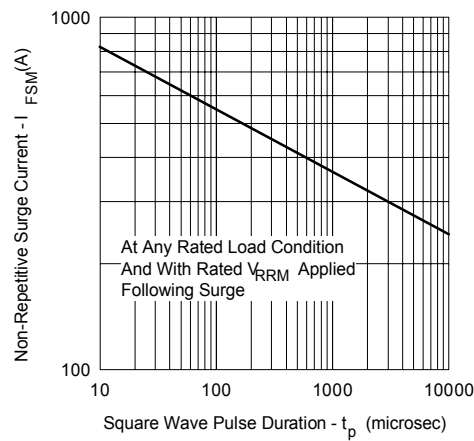


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)



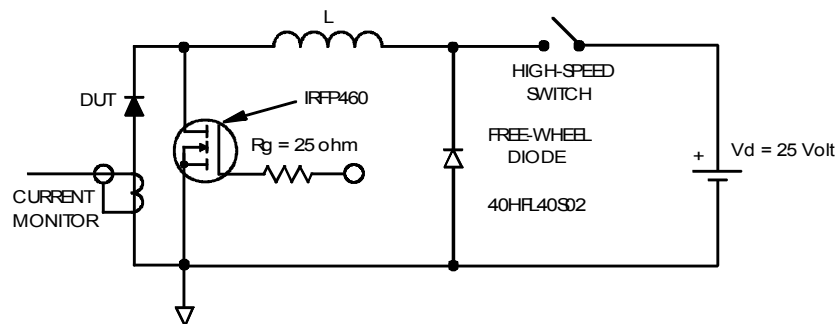


Fig. 8 - Unclamped Inductive Test Circuit

## Outline Table

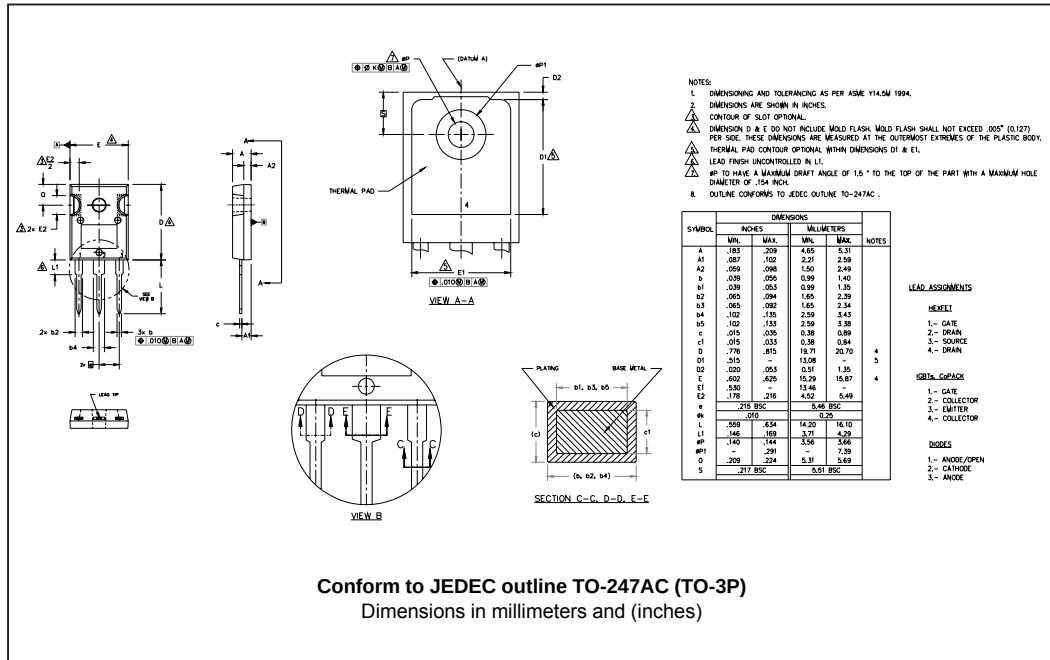

## Marking Information

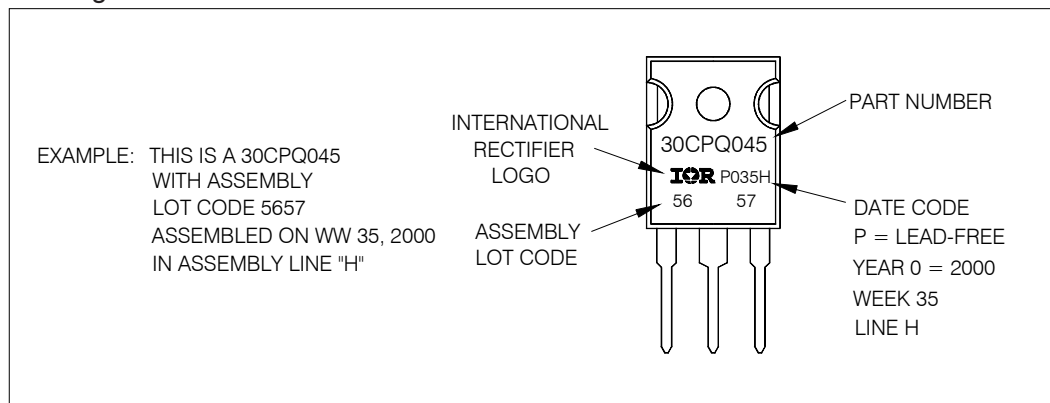

Ordering Information Table

## Device Code

|    |   |   |   |     |     |
|----|---|---|---|-----|-----|
| 30 | C | P | Q | 045 | PbF |
| 1  | 2 | 3 | 4 | 5   | 6   |

- 1** - Current Rating (30 = 30A)
- 2** - Circuit Configuration  
C = Common Cathode
- 3** - Package  
P = TO-247
- 4** - Schottky "Q" Series
- 5** - Voltage Code
- 6** -
  - none = Standard Production
  - PbF = Lead-Free

|           |
|-----------|
| 035 = 35V |
| 040 = 40V |
| 045 = 45V |

Tube Standard Pack Quantity : 25 pieces

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level and Lead-Free.  
Qualification Standards can be found on IR's Web site.