

11mm x 1.4mm BACKLIGHT

AA1114/2YC/CC

YELLOW


Features


- •LOW POWER CONSUMPTION.
- •IDEAL FOR BACKLIGHTING.
- •RoHS COMPLIANT.


Description

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

Package Dimensions

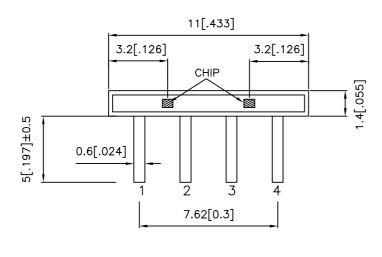





Notes

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is $\pm 0.25 (0.01")$ unless otherwise noted.
- 3. Lead spacing is measured where the leads emerge from the package.
- 4. Specifications are subject to change without notice.

SPEC NO: DSAB2773 APPROVED: J. Lu REV NO: V.3 CHECKED: Allen Liu DATE: MAR/05/2005 DRAWN: B.H.LI PAGE: 1 OF 3 ERP: 1201001463

Kingbright

Selection Guide

| Part No. | Dice | Lens Type | lv (m @ 20 | , | Viewing Angle | |
|---------------|--------------------|-------------|---------------|------|------------------|--|
| | | | Min. | Тур. | 201/2 | |
| AA1114/2YC/CC | YELLOW (GaAsP/GaP) | WATER CLEAR | 4 | 10 | 120° | |

Note:

Electrical / Optical Characteristics at Ta=25°C

| Symbol | Parameter | Device | Тур. | Max. | Units | Test Conditions |
|--------|--------------------------|--------|------|------|-------|-----------------|
| λpeak | Peak Wavelength | Yellow | 590 | | nm | IF=20mA |
| λD | Dominant Wavelength | Yellow | 588 | | nm | IF=20mA |
| Δλ1/2 | Spectral Line Half-width | Yellow | 35 | | nm | IF=20mA |
| С | Capacitance | Yellow | 20 | | pF | VF=0V;f=1MHz |
| VF | Forward Voltage | Yellow | 2.1 | 2.5 | V | IF=20mA |
| IR | Reverse Current | Yellow | | 10 | uA | VR = 5V |

Absolute Maximum Ratings at Ta=25°C


| Parameter | Yellow | Units | | | |
|-------------------------------|---------------------------------|-------|--|--|--|
| Power dissipation | wer dissipation 105 | | | | |
| DC Forward Current | 30 | mA | | | |
| Peak Forward Current [1] | 140 | mA | | | |
| Reverse Voltage | 5 | V | | | |
| Operating/Storage Temperature | rage Temperature -40°C To +85°C | | | | |
| Lead Solder Temperature [2] | 260°C For 3 Seconds | | | | |
| Lead Solder Temperature [3] | 260°C For 5 Seconds | | | | |

- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
 2. 2mm below package base.
- 3. 5mm below package base.

SPEC NO: DSAB2773 **REV NO: V.3** DATE: MAR/05/2005 PAGE: 2 OF 3 APPROVED: J. Lu **CHECKED: Allen Liu** DRAWN: B.H.LI ERP: 1201001463


^{1.} θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.


Kingbright

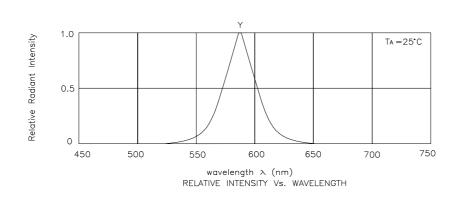



Yellow


AA1114/2YC/CC











Remarks

If there is sorting requirement (eg. forward voltage, luminous intensity or wavelength), the condition as follows:

- 1. Wavelength: +/-1nm (Test condition is based on the sorting standard).
- 2.Luminous intensity: +/-15% (Test condition is based on the sorting standard).
- 3. Forward voltage: +/-0.1V (Test condition is based on the sorting standard).

 SPEC NO: DSAB2773
 REV NO: V.3
 DATE: MAR/05/2005
 PAGE: 3 OF 3

 APPROVED: J. Lu
 CHECKED: Allen Liu
 DRAWN: B.H.LI
 ERP: 1201001463