

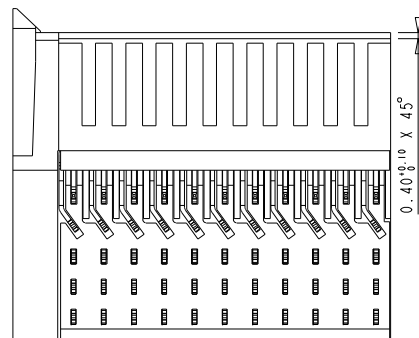
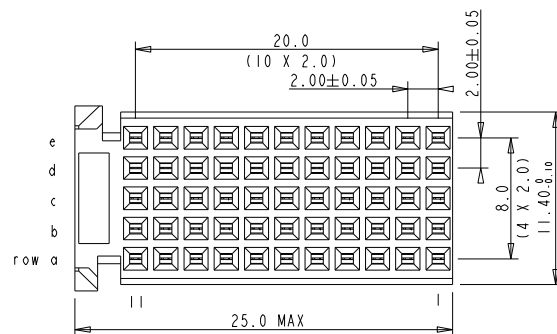


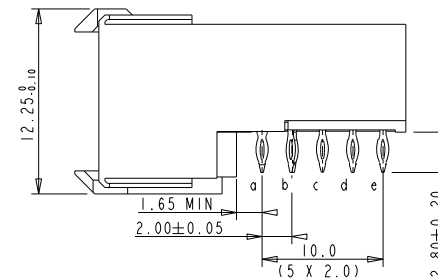

LAY-OUT
P.C.B. -HOLE

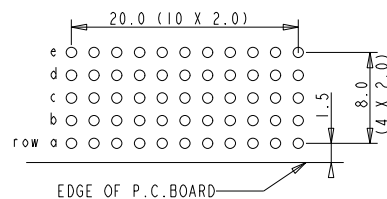

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
 1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE : 500 V AC (CONT /CONT)

OPERATING TEMPERATURE : -55°C TO 125°C

CONTACT RESISTANCE 20 MΩ MAX

INSERTION FORCE : 0.75N MAX/CONT

EXTRACTION FORCE : 0.15N MIN/CONT

INSULATION RESISTANCE : $10^4 \text{ M}\Omega \text{ MIN}$

NOTES

LEAD FREE INDICATOR :LF=LEAD FREE

PERFORMANCE LEVEL INDICATOR
(REF DWG NO.BSC .201844.003)

2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.

3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001

4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION REVISION 04	KN	14-09-01
B	105-0093	MINI	11-06-05
C	DG05-0278	Kason	02-08-05
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

Material			Spec ref				
Mat code			✓	tolerance	projection	MM	
Heattreat				1DEC ± 0.2 1DEC 2DEC ± 0.1 2DEC ANGLES ± 1° HOKEN			
Plating/Finish							
Dr	W.Panis	07/04/92				size	Scale
Eng			Product family MILLIPACS			A4	2.000
Chr			Model Name			ECN	DG05-0278
Appr			Model Revision			REL Level	
A FCI		title MPACS 5R RA RCP CONN TYPE A			drawing no BSC201418021		Rev. C
Pro/E file	catalog	HM2R20PA5100----			CUSTOMER DRAWING		sheet 1 of 1