



FEATURES:

- AC-DC LED Driver
- Input range 90-277VAC/47-440Hz
- High Efficiency up to 91%
- Operating temperature -40 to 85°C
- Over Voltage Protection
- Waterproof Case rated IP68
- Power Factor Correction
- SCP, Over Current Protection

Models Single output



Model	Max Output Power (W) *	Output Voltage Range (V)	Output Current (A)	Input Voltage (VAC/Hz)	Input Voltage (VDC)	Efficiency (%)
AMER150-50300AZ	150	36-50	3	90-277/47-440	120-390	91
AMER150-36420AZ	150	24-36	4.16	90-277/47-440	120-390	90
AMER150-24630AZ	151.2	12-24	6.3	90-277/47-440	120-390	90

* Exceeding the maximum output power will permanently damage the converter

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

Input Specifications

Parameters	Conditions	Typical	Maximum	Units
Inrush current <2ms	115VAC 230VAC	50 75		A
Leakage current	115VAC 230VAC	0.75 1		mA
AC current	115VAC 230VAC	2.2 0.7		A
Power Factor	115VAC 230VAC		0.98 0.94	
External fuse			250V/3.5A	
Start up time		500		ms
Surge voltage	2sec		440	V

Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Current accuracy		±3		%
Line regulation	LL-HL	±1		%
Load regulation	0-100% load	±3		%
Ripple & Noise *	20MHz Bandwidth	75		mV p-p
Hold-up time (min)		45		ms
Current adjustment range		100-0		%

* Tested with 0.1µF (M/C) or (C/C) and 47µF (E/C) parallel capacitors at the end.

Isolation Specifications

Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage	3sec		3000	VAC
Isolation Resistance	500VDC	>1000		MΩ
Isolation Capacitance		1000		pF

General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency		100		KHz
Over current protection		95-110% of Iout		
Over voltage protection		110% of Vout		


General Specifications (continued)

Parameters	Conditions	Typical	Maximum	Units
Short circuit protection		Continuous		
Short circuit restart		Auto recovery		
Over temperature protection		>105°C		
Operating temperature	With derating over 55°C	-40 to +85		°C
Maximum case temperature			100	°C
Storage temperature		-40 to +95		°C
Temperature coefficient		±0.02		% / °C
Cooling		Free air convection		
Humidity			95	% RH
Case material		Aluminum		
Potting		Epoxy (IP67 rated)		
Wires		UL1015 18AWG input & 14AWG output *20CM		
Weight		750		g
Dimensions (L x H x W)		7.13 x 2.32 x 1.85 inches 181.00 x 59.00 x 47.00 mm		
MTBF		>400,000 hrs (MIL-HDBK-217F at +25°C)		

Safety Specifications


Parameters	
Agency approvals	cULus (pending), CE
Standards	UL8750, UL60950-1, EN55022, class B, EN60529(IP68), EN61347-1, EN61347-2-13

Dimensions

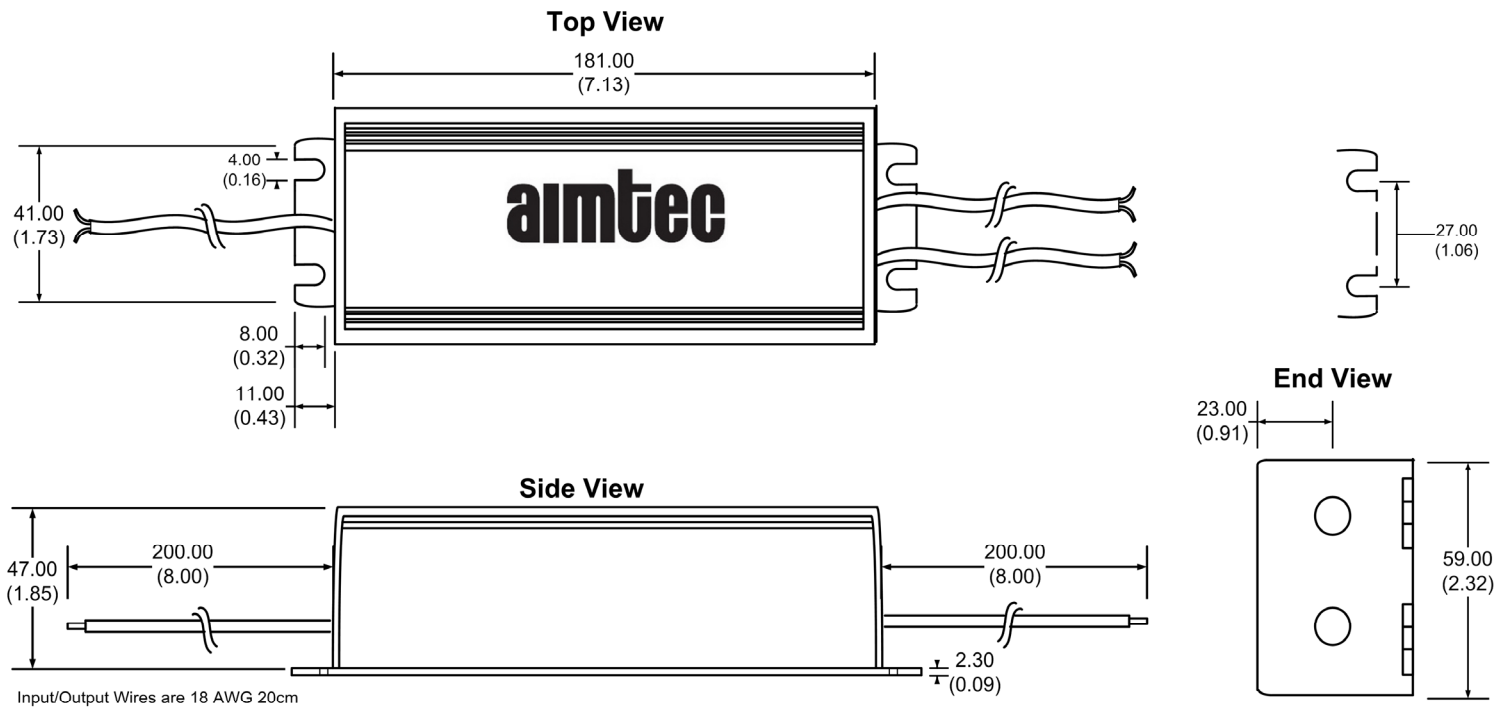


Measurements in Millimeters (inch)
Case Tolerance: ±0.5 (±0.02)

Application Circuit

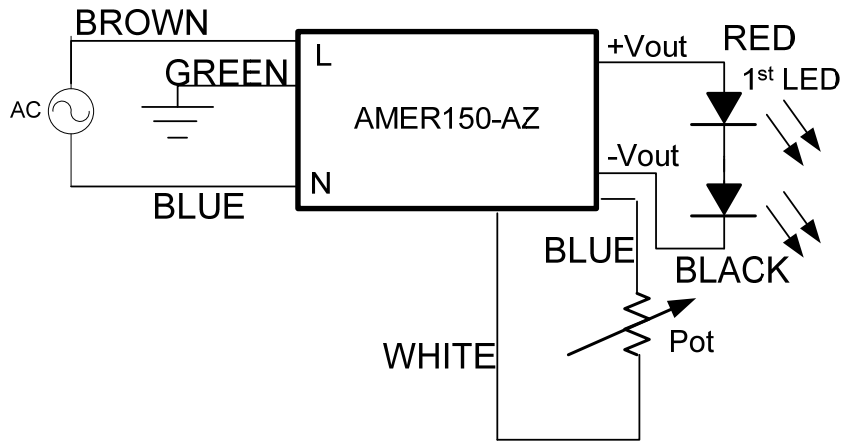


Model Number	Maximum Pot Value (kΩ)
AMER150-50300AZ	19.00
AMER150-36420AZ	28.00
AMER150-24630AZ	27.00

Temperature graph

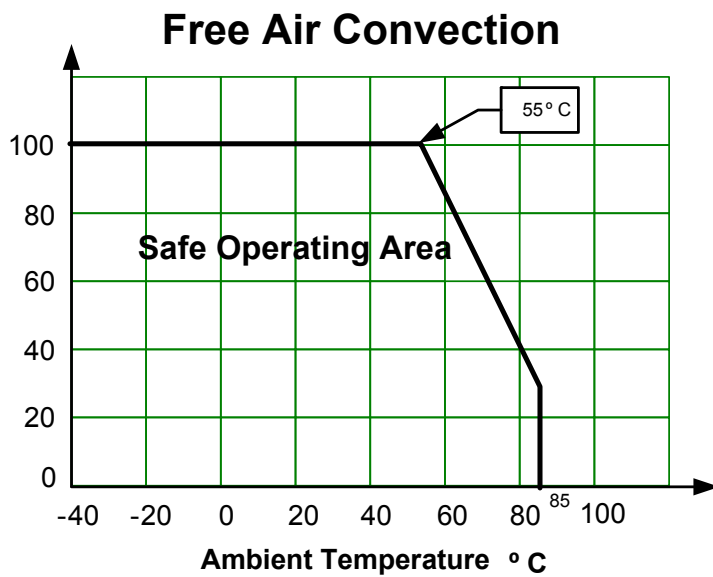


Efficiency vs. Input Voltage & Output Current (CC mode)

AMER150-50300AZ

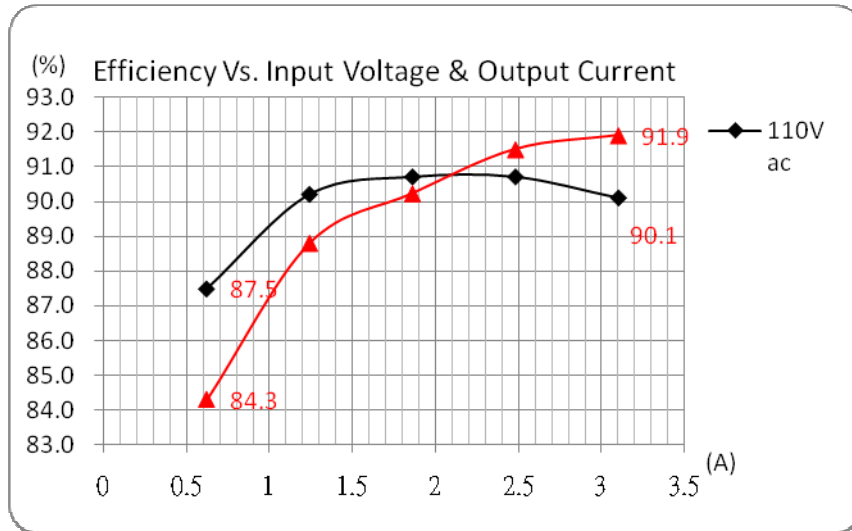


AMER150-36420AZ

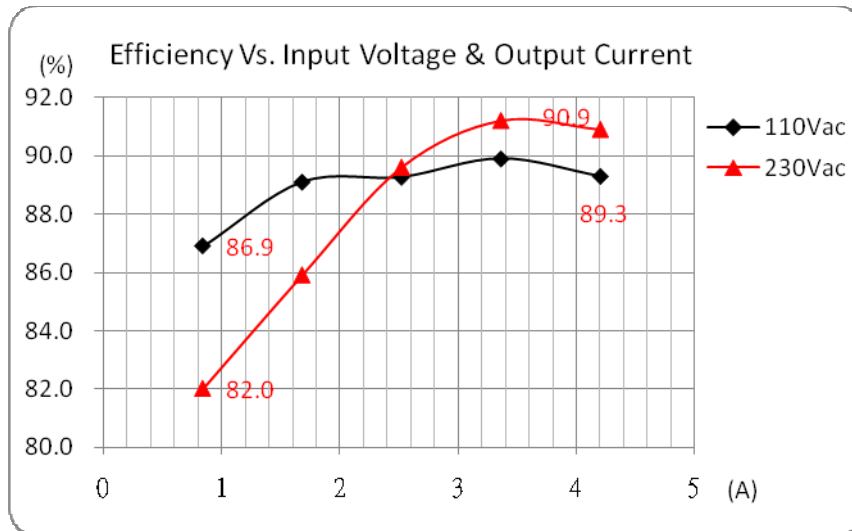


Efficiency vs. Input Voltage & Output Current (CC mode) Continued

AMER150-24630AZ

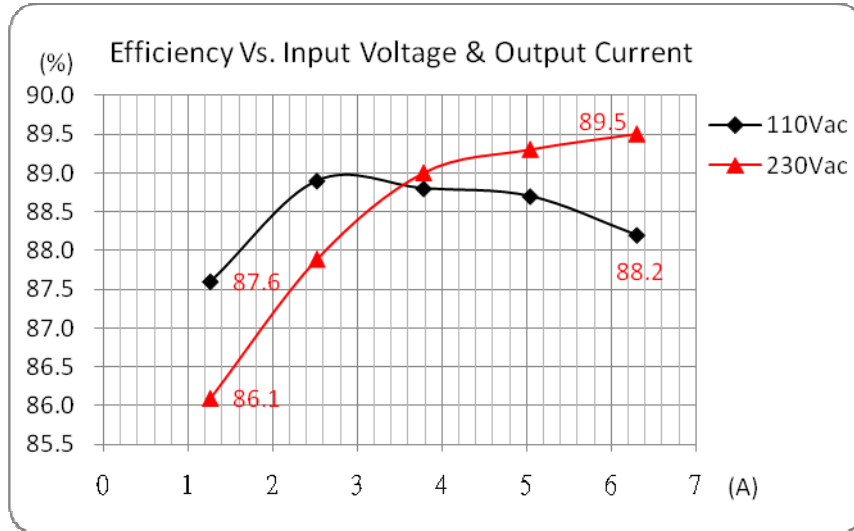


PFC value vs. Output Load Current (CC mode)

AMER150-50300AZ

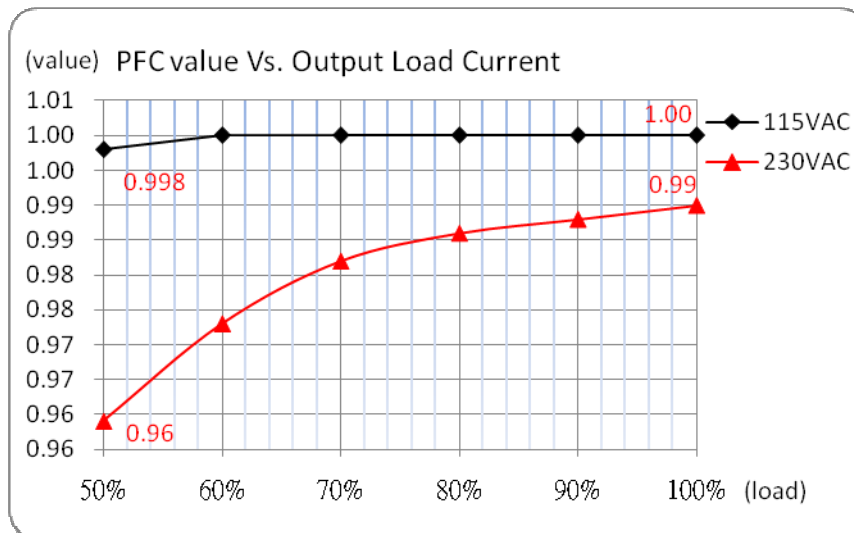


PFC value vs. Output Load Current (CC mode)
Continued

AMER150-36420AZ

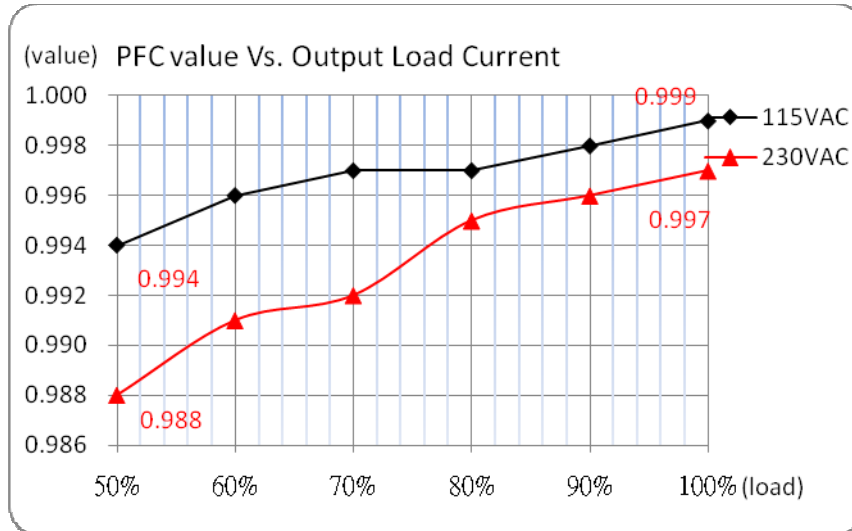


AMER150-24630AZ

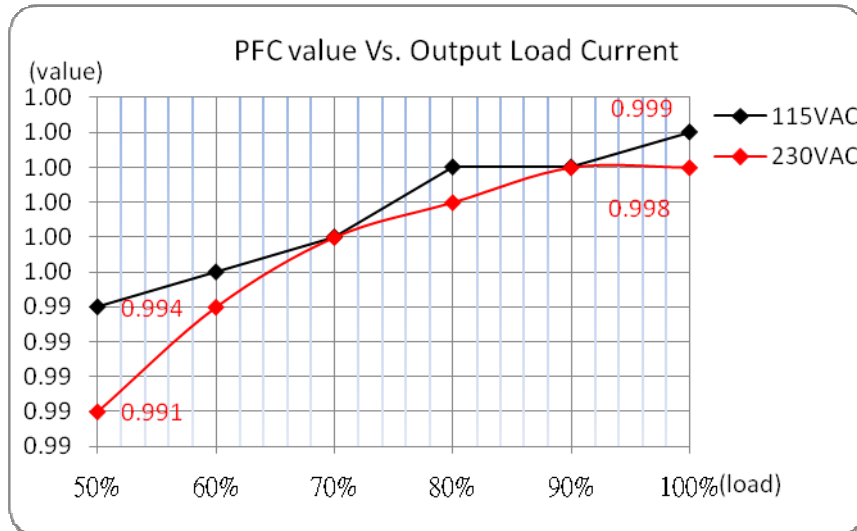


Constant Current vs. Constant Voltage Mode

AMER150-50300AZ

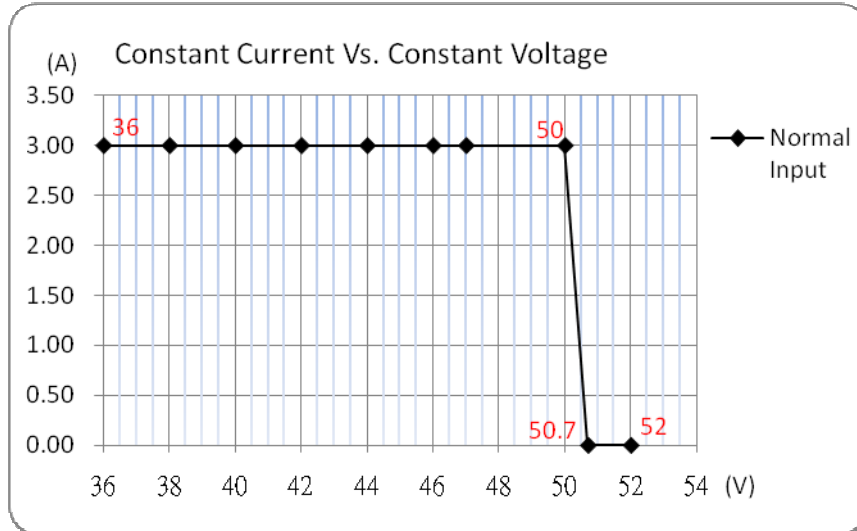


AMER150-36420AZ

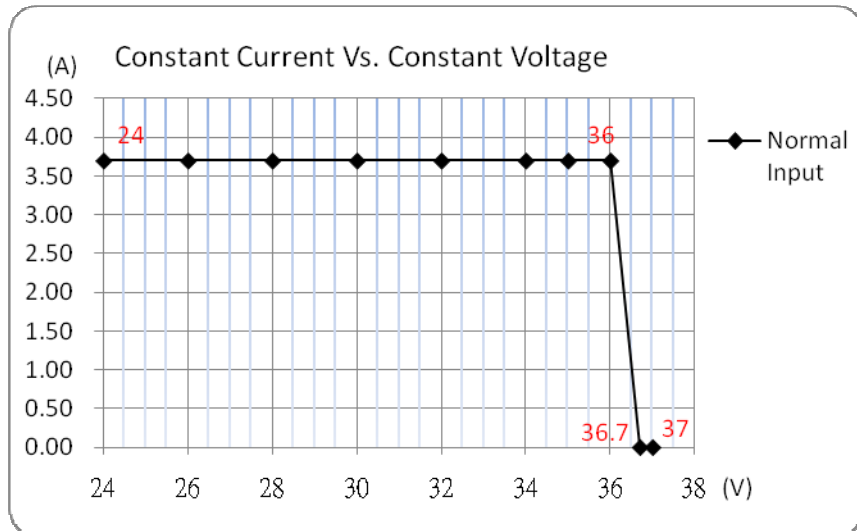


Constant Current vs. Constant Voltage Mode Continued

AMER150-24630AZ

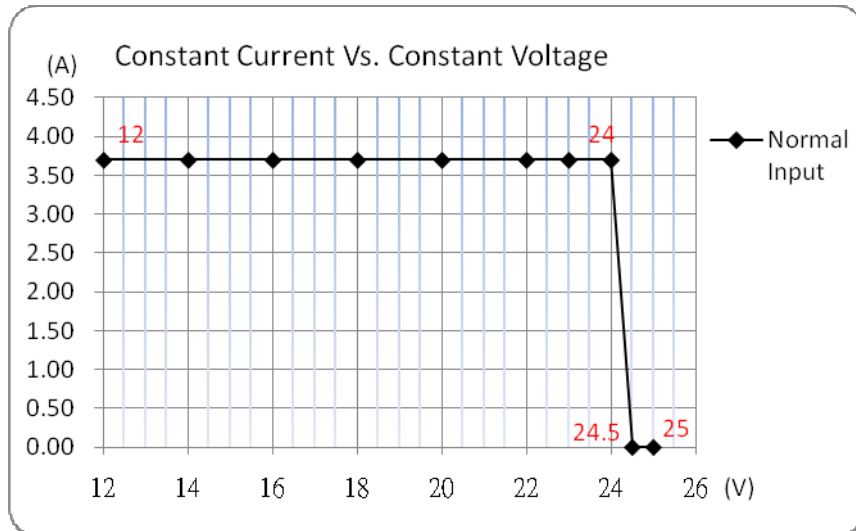


Output Current vs. R_{adj}

AMER150-50300AZ

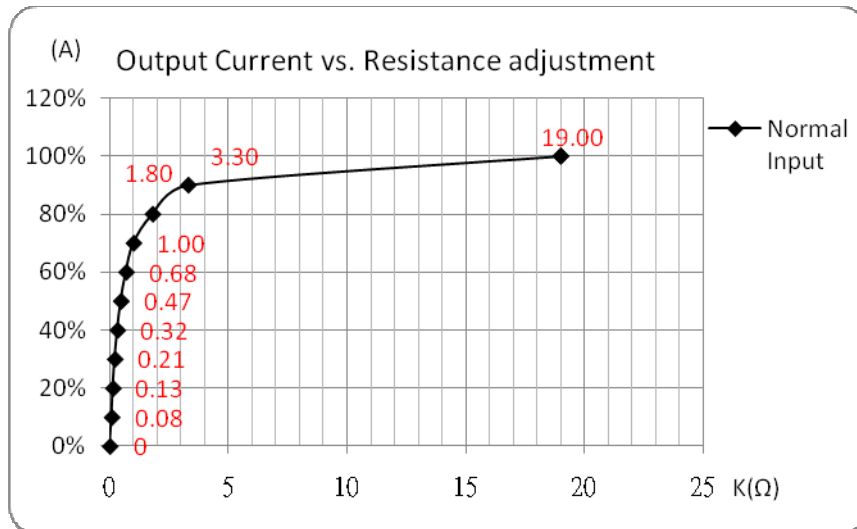


Output Current vs. Radj Continued

AMER150-36420AZ

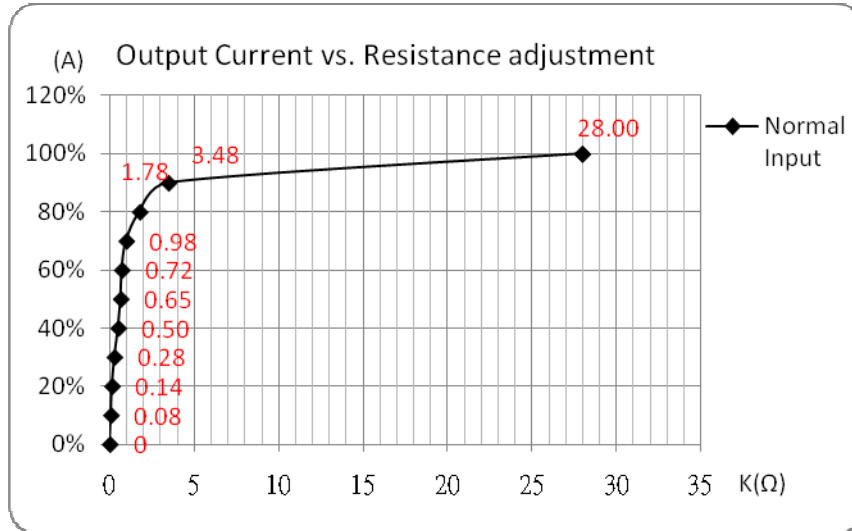

AMER150-24630AZ

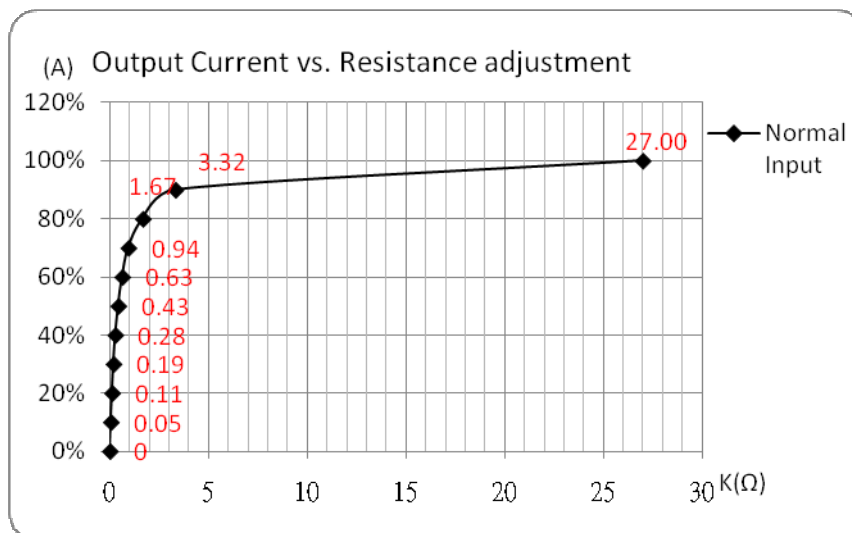

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.