



FEATURES:

- AC-DC Constant current LED Driver
- Input range 90-305VAC/47-440Hz
- High Efficiency up to 89%
- Operating temperature -40 to 85°C
- Over Temperature Protection
- Waterproof Case rated IP68
- Power Factor Correction
- SCP, Over Current Protection



Models Single output

Model	Max Output Power (W) *	Output Voltage Range (V)	Output Current (A)	Input Voltage (VAC/Hz)	Input Voltage (VDC)	Efficiency (%)
AMEPR60-50120AZ	60	36-50	1.2	90-305/47-440	120-430	89
AMEPR60-36170AZ	59.8	24-36	1.66	90-305/47-440	120-430	88
AMEPR60-24250AZ	60	12-24	2.5	90-305/47-440	120-430	87
AMEPR60-12500AZ	60	5-12	5	90-305/47-440	120-430	85

*Exceeding the maximum output power will permanently damage the converter

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

Input Specifications

Parameters	Conditions	Typical	Maximum	Units
Inrush current <2ms	115VAC	30		A
	230VAC	50		
Leakage current	115VAC	0.5		mA
	230VAC	0.7		
AC current	115VAC	0.73		A
	230VAC	0.33		
Power Factor	115VAC	0.97		
	230VAC	0.93		
External fuse			250V/1.5A	
Start up time		250		ms
Surge voltage	2sec		440	V

Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Current accuracy		±3		%
Line regulation	LL-HL	±1		%
Load regulation	0-100% load	±3		%
Ripple & Noise *	20MHz Bandwidth	75		mV p-p
Hold-up time		90		ms
Current adjustment range		100-0		%
Minimum Load Voltage	See the models table			

* Tested with 0.1µF (M/C) or (C/C) and 10µF (E/C) parallel capacitors at the end.

Isolation Specifications

Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage	3 sec/3.5mA		3000	VAC
Isolation Resistance	500VDC	>1000		MΩ
Isolation Capacitance		1000		pF


General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency		130		KHz
Over current protection		95-110% of Iout		
Over voltage protection		110% of Vout		
Short circuit protection		Continuous		
Short circuit restart		Auto recovery		
Over temperature protection		>105°C		
Operating temperature	With derating over 55°C	-40 to +85		°C
Maximum case temperature			100	°C
Storage temperature		-40 to +95		°C
Temperature coefficient		±0.02		% / °C
Cooling		Free air convection		
Humidity			95	% RH
Case material		Plastic		
Potting		Epoxy (IP67 rated)		
Wires		UL1015 18AWG *20CM		
Weight		350		g
Dimensions (L x H x W)		5.30 x 2.27 x 1.59 inches 134.80 x 57.68 x 40.50 mm		
MTBF		>400,000 hrs (MIL-HDBK-217F at +25°C)		


Safety Specifications

Parameters	
Agency approvals	cULus CE
Standards	UL8750, UL60950-1, EN55022, class B, EN60529(IP68), EN61347-1, EN61347-2-13

Dimensions

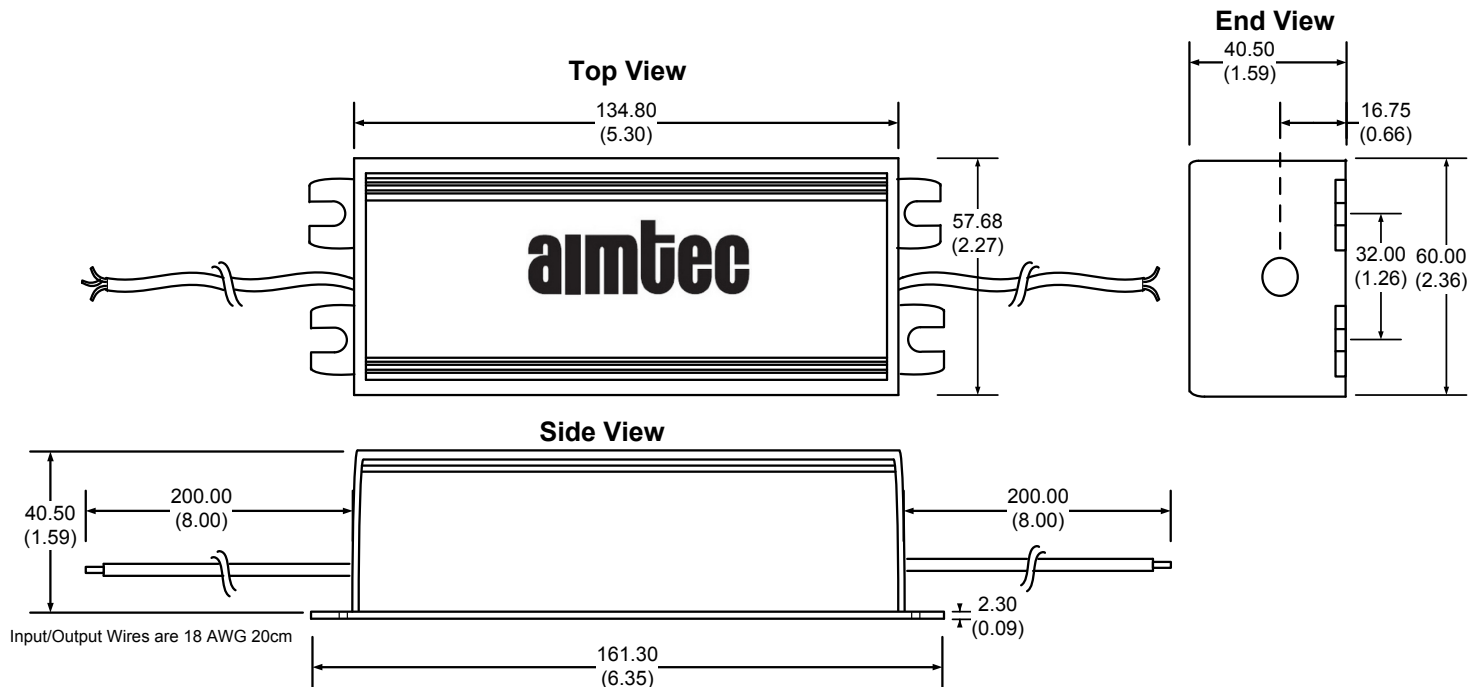


Application Circuit

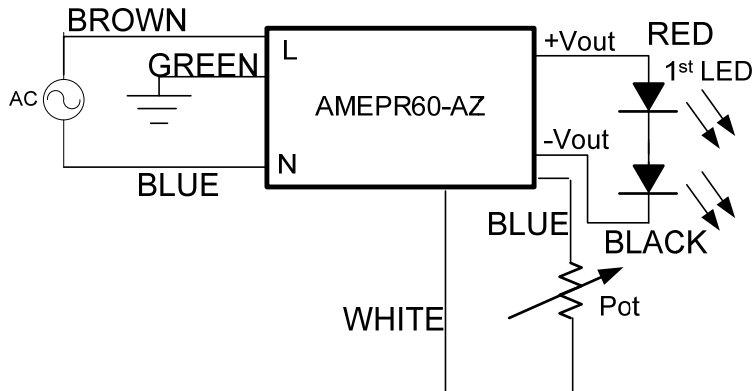

Model Number	Maximum Pot Value (kΩ)
AMEPR60-50120AZ	26.00
AMEPR60-36170AZ	16.95
AMEPR60-24250AZ	26.10
AMEPR60-12500AZ	34.10


Temperature graph

Free Air Convection

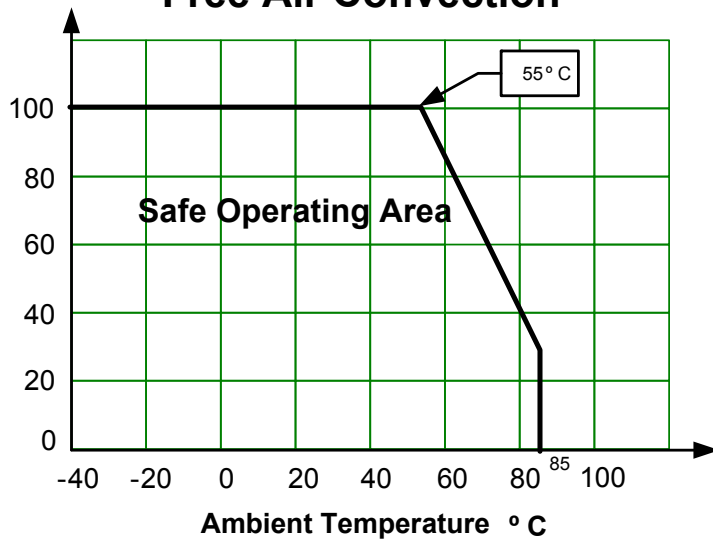


Efficiency Vs. Input Voltage & Output Current (Constant current load)

AMEPR60-50120AZ

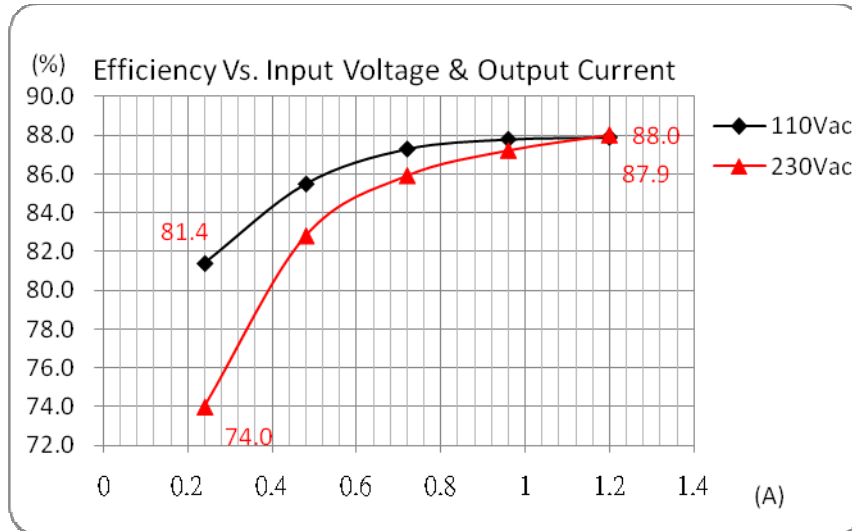


AMEPR60-36170AZ

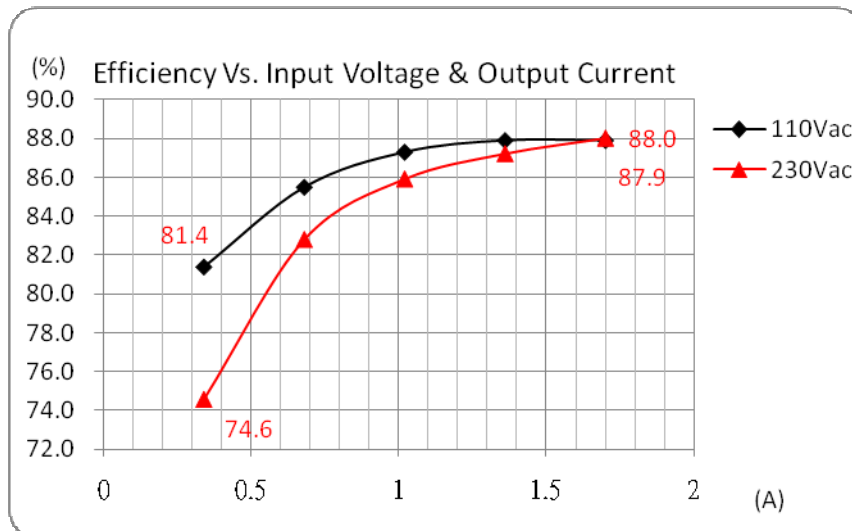


Efficiency Vs. Input Voltage & Output Current (Constant current load)
Continued

AMEPR60-24250AZ

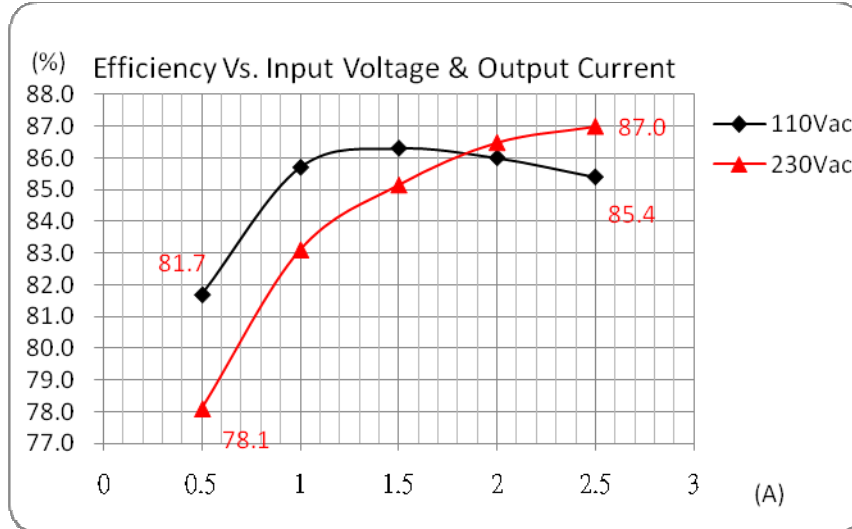


AMEPR60-12500AZ

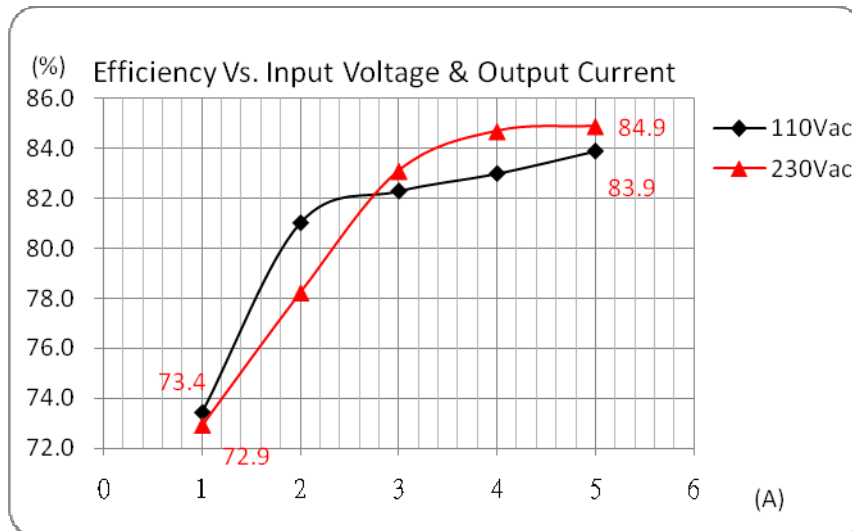


PFC Value vs. Output Load Current (constant current mode)

AMEPR60-50120AZ

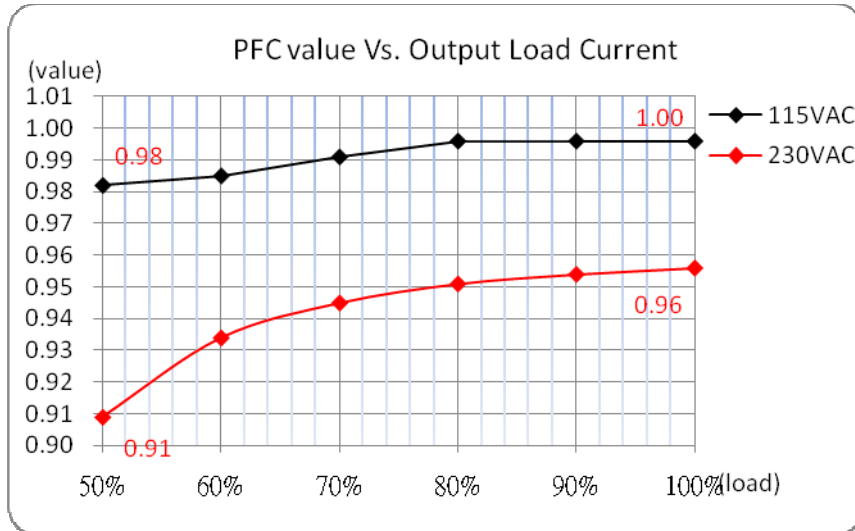


AMEPR60-36170AZ

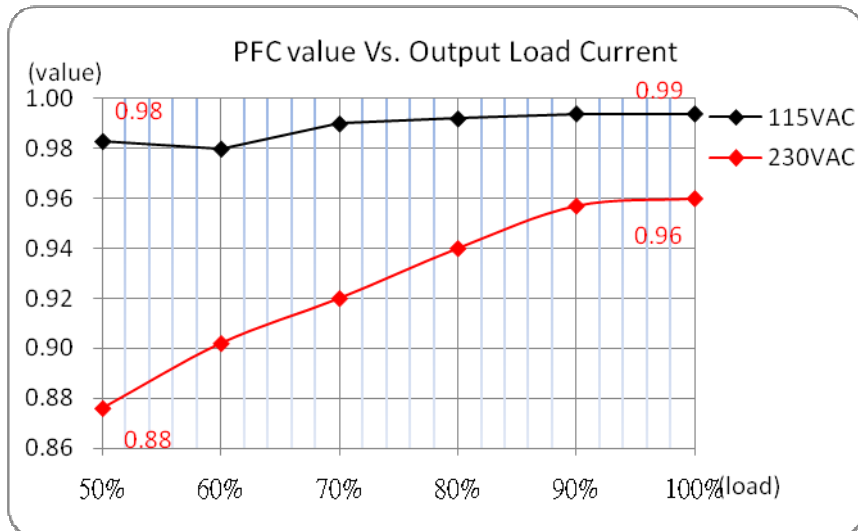


PFC Value vs. Output Load Current (constant current mode)
Continued

AMEPR60-24250AZ

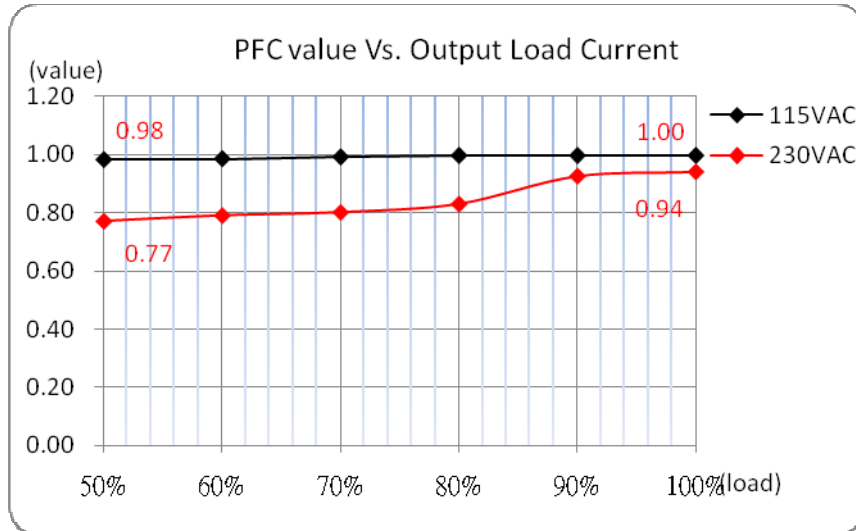


AMEPR60-12500AZ

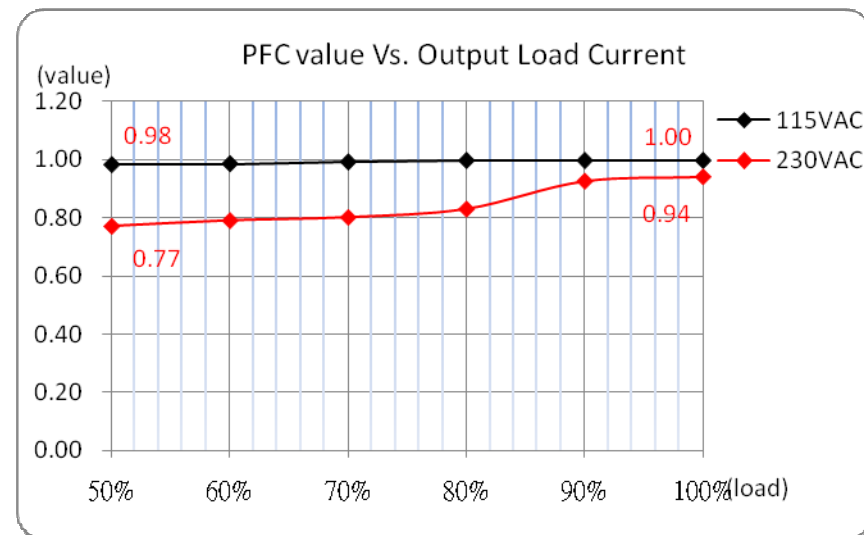


Constant Current vs. Constant Voltage Mode

AMEPR60-50120AZ

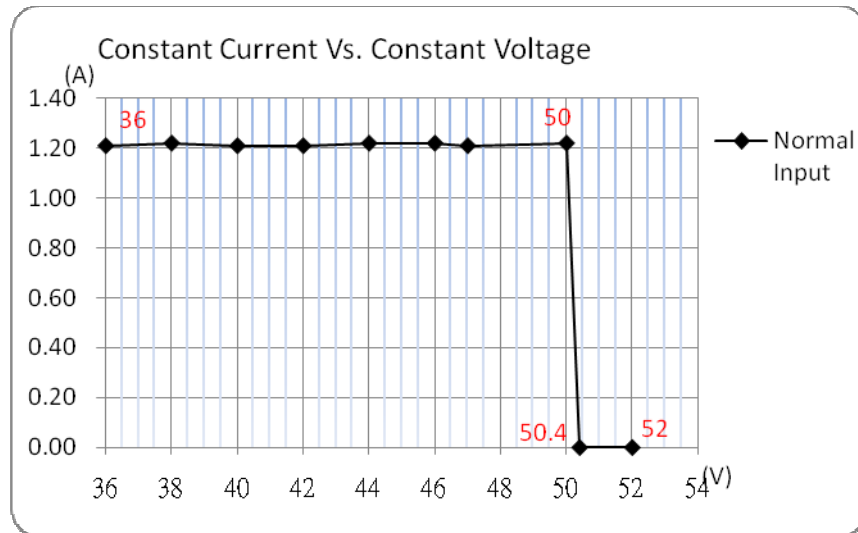


AMEPR60-36170AZ

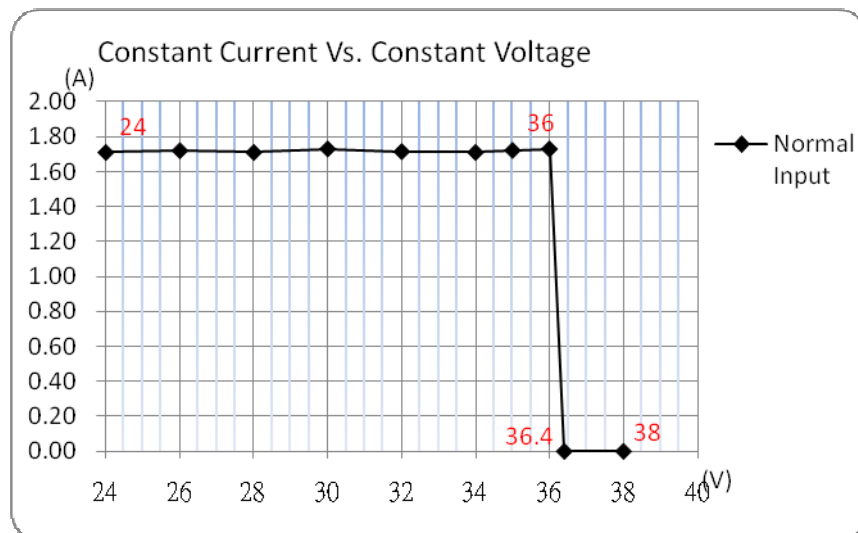


Constant Current vs. Constant Voltage Mode Continued

AMEPR60-24250AZ

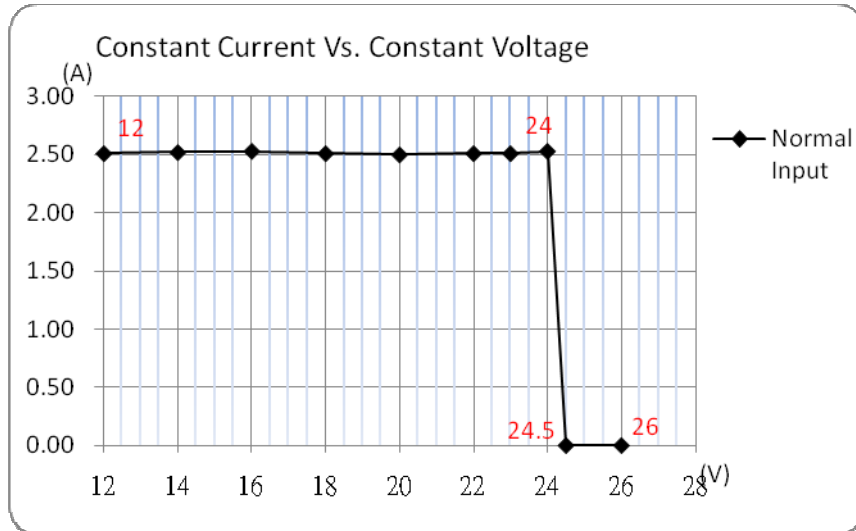


AMEPR60-12500AZ

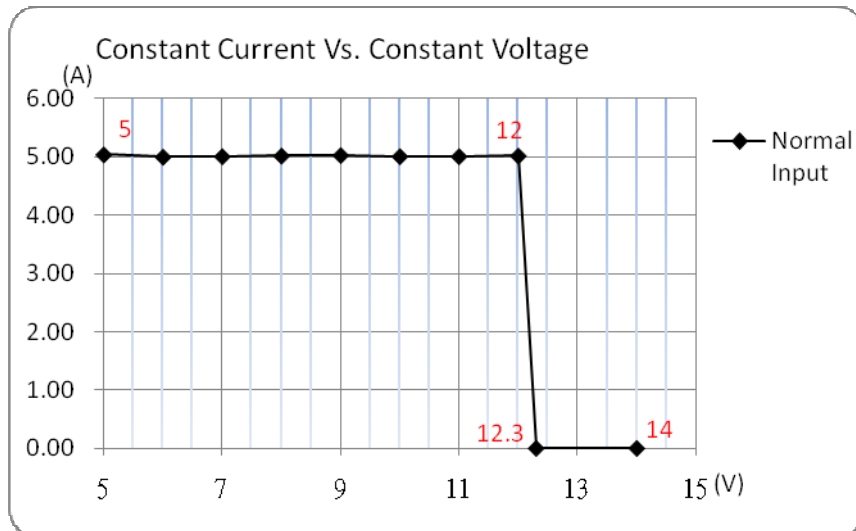


Dimming Control (Output Current vs. R_{adj})

AMEPR60-50120AZ

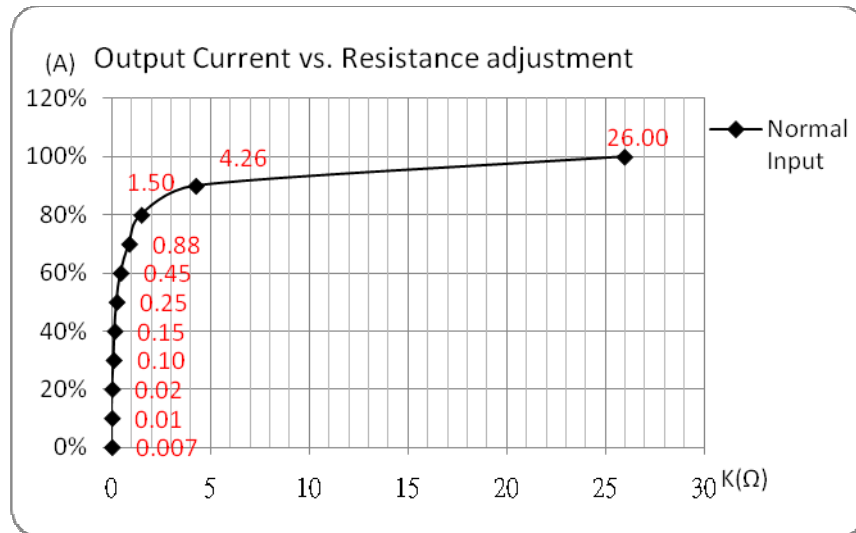


AMEPR60-36170AZ

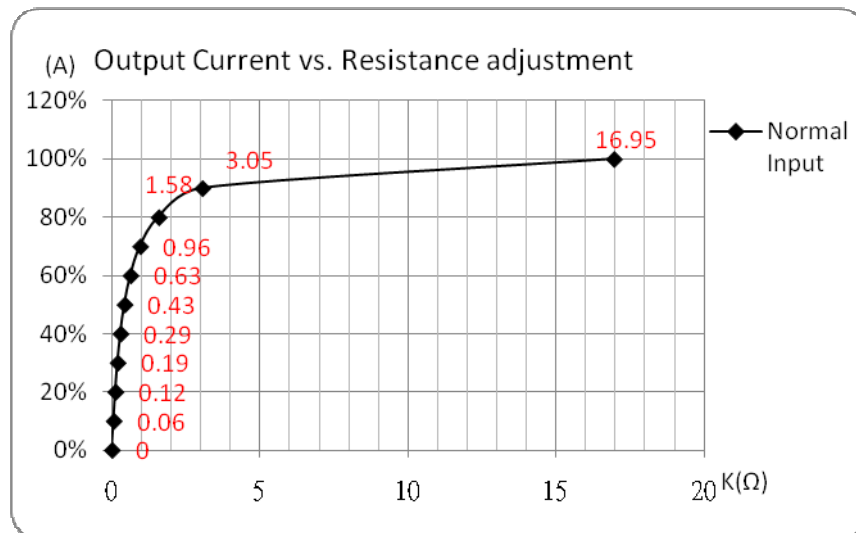


Constant Current vs. Constant Voltage Mode Continued

AMEPR60-24250AZ

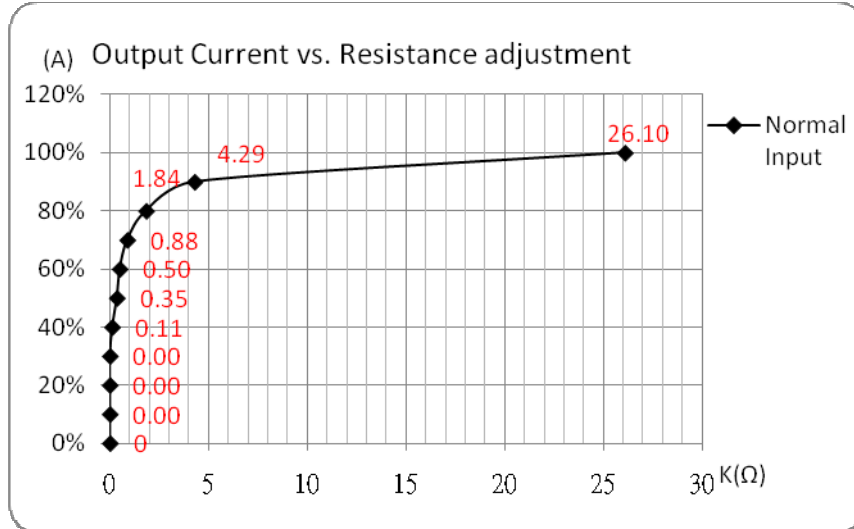

AMEPR60-12500AZ

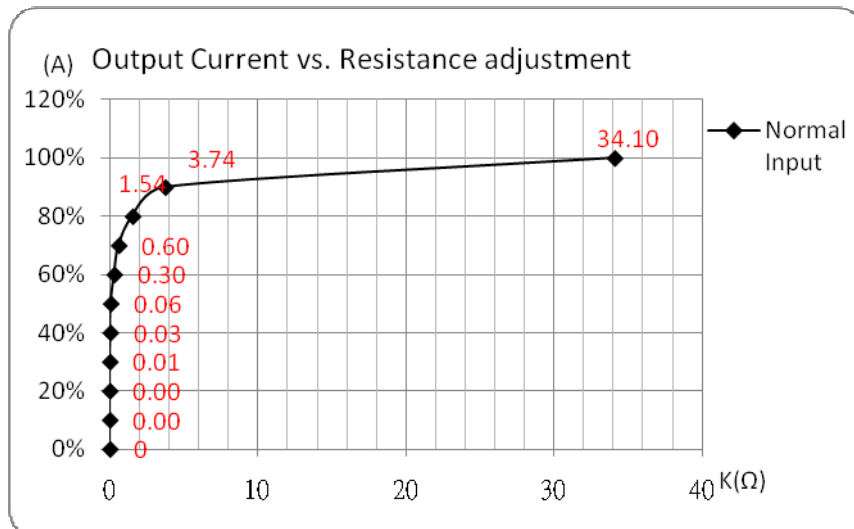

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.