

HIGH FREQUENCY MAGNETICS

Specialty Surface Mount Shielded Transformer

TM00108


- Operates as high frequency pulse transformer in telecom switching systems at various signaling rates
- Interwinding Electrostatic Shield provides low capacitance and high EMI suppression
- Electrical equivalents: 2664A, 2741L2, 2779D
- Operating temperature range: -40° C to +85° C
- Meets IEC 695, 2-2 flammability requirements
- PWB Process Capability: standard printed wiring board assembly techniques, total-immersion cleaning
- Reliability testing: Shock, vibration, temperature cycling, temperature - humidity - bias

ELECTRICAL SPECIFICATIONS AT 25° C

Part Number	Nominal Turns Ratio ±2%	Secondary Inductance ¹ mH min	DCR Ω max		Secondary Leakage Inductance ² μH		Interwinding & Winding to Shield Capacitance ³ pF max		Minimum Interwinding Breakdown Voltage Vrms
	Pri : Sec (5-2) : (4-1)	(4-1)	(4-1)	(5-2)	(4-1)		(4-1) : 6 ⁴	(4-1) : (5-2) ⁵	
2779D	1 : 2	1.58	3.3	2.05	8.5 max	6.5 min	12	3	1500


- measured at 100 kHz, 0.05 Vac
- measured at 1 MHz, 0.05 Vac
- measured at 1 kHz, 1 Vac
- with (5-2) grounded
- with 6 grounded

SCHEMATIC

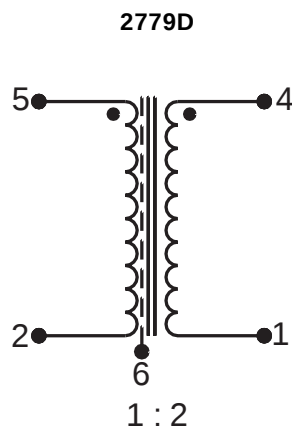

MECHANICAL

2779D

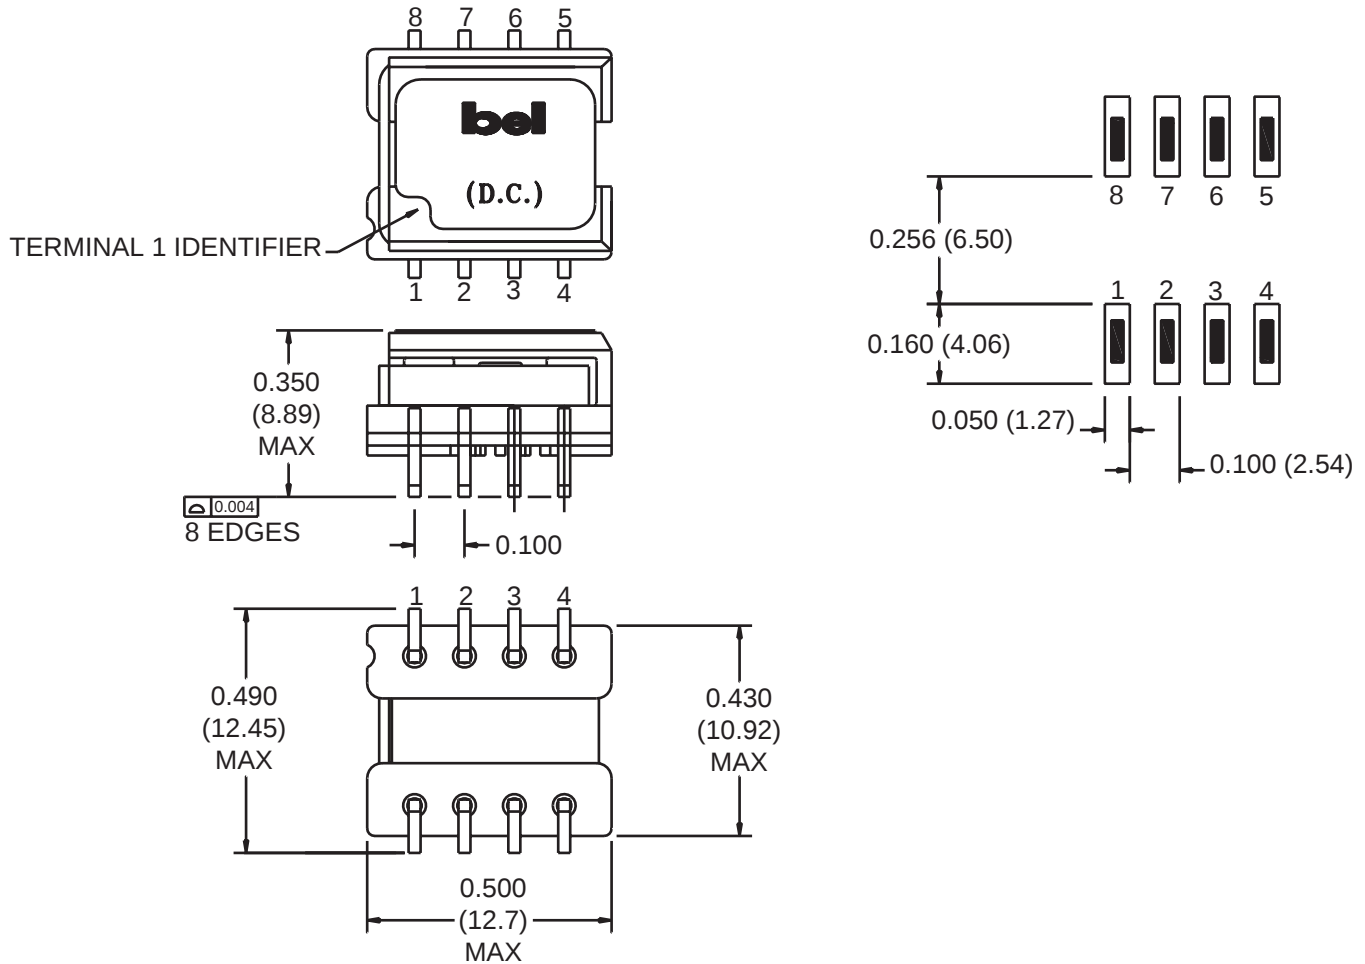

Unless otherwise specified, dimensions are nominal and in inches (millimeters).

©2000 Bel Fuse Inc. Specifications subject to change without notice. 09.00

CORPORATE

Bel Fuse Inc.
198 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

T1-18

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com