


## 2150A, 2151A, 2112A, 2152A, 2153A and 2194A Series Non-Relampable Neon-Incandescent Indicator Lights

### DESCRIPTION AND FEATURES

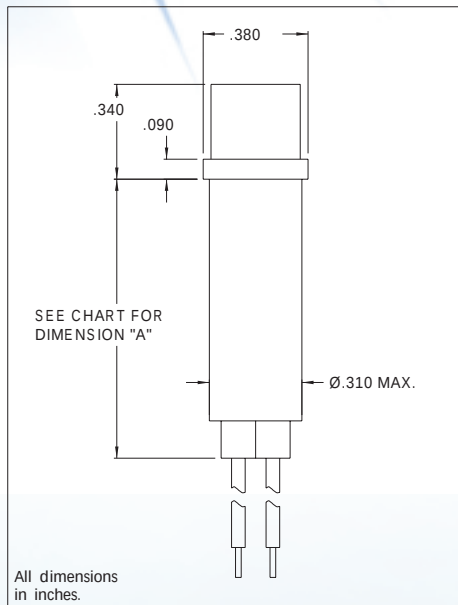

Mounting: Ø.310 MIN., supplied with push-on speednut SN1287.

Wire Leads: No.22 AWG (105°C) 4.40/4.80 long, stripped .430/.570

Lens: Polycarbonate-neon transparent, incandescent-translucent

Bezel: Polished stainless steel. For black finish add "X" after the series letter(s).

Housing: White Nylon

| Lens Color | Neon                      |                           | Incandescent       |                    |
|------------|---------------------------|---------------------------|--------------------|--------------------|
|            | Model No.<br>(105-125VAC) | Model No.<br>(208-250VAC) | Model No.<br>(12V) | Model No.<br>(28V) |
| Red        | 2150A1                    | 2151A1                    | 2194A1-12V         | 2194A1-28V         |
| Clear      | 2150A2                    | 2151A2                    | -                  | -                  |
| Amber      | 2150A3                    | 2151A3                    | 2194A3-12V         | 2194A3-28V         |
| White      | 2150A4                    | 2151A4                    | 2194A4-12V         | 2194A4-28V         |
| Green      | 2152A5*                   | 2153A5*                   | 2194A5-12V         | 2194A5-28V         |
| Blue       | 2152A6**                  | 2153A6**                  | -                  | -                  |
| Lamp used  | C2A+R resistor            | C2A+R resistor            | #2162              | #2187              |
| Lead Color | Black                     | Black/Red                 | Yellow             | Purple             |
| "A" DIM    | 1.310                     | 1.310                     | .830               | .830               |

\* Incorporates G2B lamp and resistor.

\*\* Incorporates T2B lamp and resistor.

Underwriters Laboratories (UL) File No. E20325

Canadian Standards Association (CSA) File No. LR13346