

## 1H1G THRU 1H8G


CURRENT 1.0 Ampere  
VOLTAGE 50 to 1000 Volts

### Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Low forward voltage drop
- High current capability
- High reliability
- Low power loss, high efficiency
- High surge current capability
- High speed switching
- Low leakage

### Mechanical Data

- Case : R-1 molded plastic body
- Epoxy : UL94V-0 rate flame retardant
- Lead : Plated axial lead solderable per MIL-STR-750, method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any
- Weight : 0.007 ounce, 0.19 gram

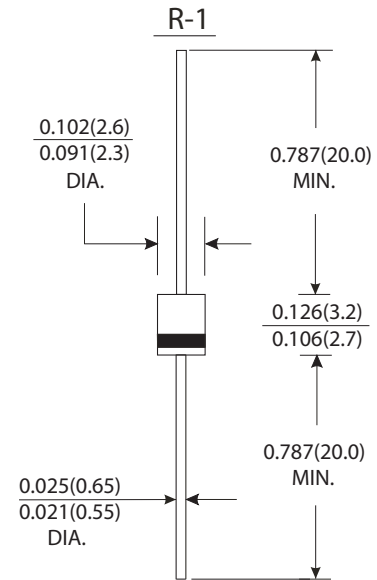

Dimensions in inches and (millimeters)

### Maximum Ratings And Electrical Characteristics

(Ratings at 25 °C ambient temperature unless otherwise specified, Single phase, half wave 60Hz, resistive or inductive load. For capacitive load, derate by 20%)

|                                                                                                          | Symbols                            | 1H1G        | 1H2G | 1H3G | 1H4G | 1H5G | 1H6G | 1H7G | 1H8G | Units |
|----------------------------------------------------------------------------------------------------------|------------------------------------|-------------|------|------|------|------|------|------|------|-------|
| Maximum recurrent peak reverse voltage                                                                   | V <sub>RRM</sub>                   | 50          | 100  | 200  | 300  | 400  | 600  | 800  | 1000 | Volts |
| Maximum RMS voltage                                                                                      | V <sub>RMS</sub>                   | 35          | 70   | 140  | 210  | 280  | 420  | 560  | 700  | Volts |
| Maximum DC blocking voltage                                                                              | V <sub>DC</sub>                    | 50          | 100  | 200  | 300  | 400  | 600  | 800  | 1000 | Volts |
| Maximum average forward rectified current 0.375"(9.5mm) lead length T <sub>A</sub> =55 °C                | I <sub>(AV)</sub>                  | 1.0         |      |      |      |      |      |      |      | Amp   |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)         | I <sub>FSM</sub>                   | 25.0        |      |      |      |      |      |      |      | Amps  |
| Maximum instantaneous forward voltage at 1.0A                                                            | V <sub>F</sub>                     | 1.0         |      |      | 1.3  |      | 1.7  |      |      | Volts |
| Maximum DC Reverse Current at rated DC blocking voltage                                                  | I <sub>R</sub>                     | 5.0         |      |      |      |      |      |      |      | μ A   |
| Maximum full load reverse current full cycle average. 0.375"(9.5mm) lead length at T <sub>L</sub> =55 °C |                                    | 100         |      |      |      |      |      |      |      |       |
| Maximum reverse recovery time (Note 1)                                                                   | T <sub>rr</sub>                    | 50          |      |      |      |      | 70   |      |      | ns    |
| Typical junction capacitance (Note 2)                                                                    | C <sub>J</sub>                     | 20          |      |      |      |      | 15   |      |      | pF    |
| Operating Junction and Storage temperature Range                                                         | T <sub>J</sub><br>T <sub>STG</sub> | -65 to +150 |      |      |      |      |      |      |      | °C    |

#### Notes:

- (1) Test conditions: I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>rr</sub>=0.25A.
- (2) Measured at 1MHz and applied reverse voltage of 4.0 Volts.



## RATINGS AND CHARACTERISTIC CURVES 1H1G THRU 1H8G

FIG.1-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

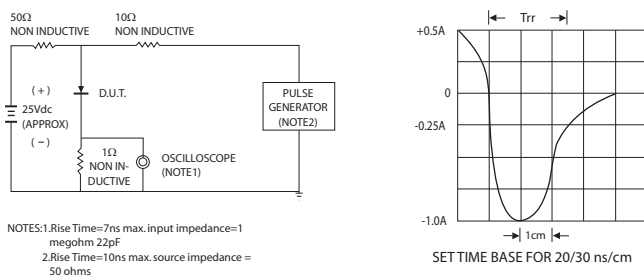


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

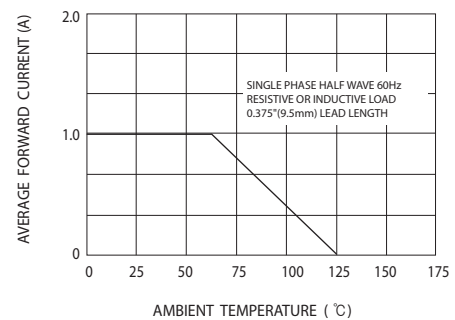


FIG.3-TYPICAL FORWARD CHARACTERISTICS

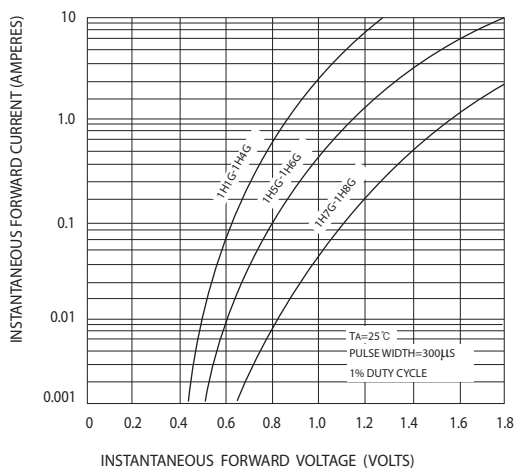


FIG.4-TYPICAL REVERSE CHARACTERISTICS

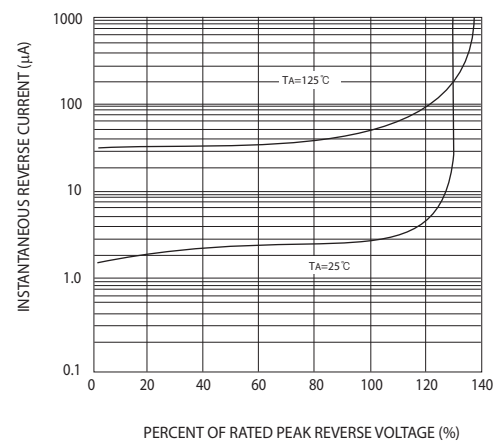


FIG.5-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

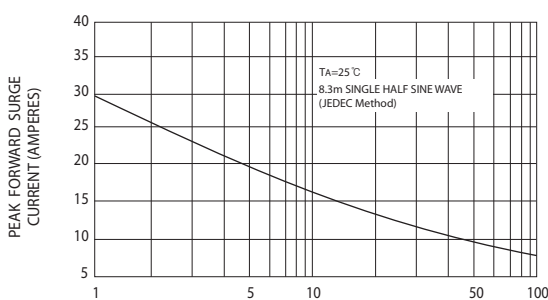


FIG.6-TYPICAL JUNCTION CAPACITANCE

