

ISOLATED DC/DC CONVERTERS

48 V Input 12 V/12 A, 3.3 V/46 A, 5 V/30 A, 1.2 V - 2.5 V/50 A



0RQB-C5T Series RoHS Compliant PRELIMINARY

- Isolated
- High Efficiency
- High Power Density
- Low Cost
- Input Under Voltage Lockout
- Fixed Frequency (330 kHz)
- Active Low/High (Option)
- UL60950 Recognized (UL/cUL)
- Output Over Voltage Shutdown
- OCP/SCP
- Over Temperature Protection
- Remote On/Off
- Output Voltage Trim
- Positive/Negative Remote Sense
- Input Over Voltage Lockout
- Basic Isolation



Description

The 0RQB-C5T Series are isolated dc/dc converters that operate from a nominal 48 V source. These units will provide up to 150 W of output power from a nominal 48 V input. These units are designed to be highly efficient and low cost. Typical efficiency of 12 V output at 48 V input at full load is 93%. Features include remote on/off, over current protection and under-voltage lockout. These converters are provided in an industry standard quarter brick package.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active High	Model Number Active Low
12 V	36 V - 75 V	12 A	144 W	93.0%	0RQB-C5T120	0RQB-C5T12L
5.0 V	36 V - 75 V	30 A	150 W	92.5%	0RQB-C5T050	0RQB-C5T05L
3.3 V	36 V - 75 V	46 A	152 W	91.0%	0RQB-C5T033	0RQB-C5T03L
2.5 V	36 V - 75 V	50 A	125 W	90.5%	0RQB-C5T025	0RQB-C5T02L
1.8 V	36 V - 75 V	50 A	90 W	88.0%	0RQB-C5TV80	0RQB-C5TV8L
1.5 V	36 V - 75 V	50 A	75 W	85.0%	0RQB-C5TV50	0RQB-C5TV5L
1.2 V	36 V - 75 V	50 A	60 W	83.0%	0RQB-C5TV20	0RQB-C5TV2L

Note: Add "G" suffix at the end of the model number to indicate Tray Packaging.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	80 V	
Remote On/Off	-0.3 V	-	18 V	
I/O Isolation Voltage	-	-	2000 V	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

Note: All specifications are typical at nominal input, full load at 25 °C unless noted.

ISOLATED DC/DC CONVERTERS

48 V Input 12 V/12 A, 3.3 V/46 A, 5 V/30 A, 1.2 V - 2.5 V/50 A



Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	36 V	48 V	75 V	
Input Current (full load)				
Vo=12 V	-	-	4.5 A	
Vo=5.0 V	-	-	4.9 A	
Vo=3.3 V	-	-	4.9 A	
Vo=2.5 V	-	-	4.1 A	
Vo=1.8 V	-	-	3.0 A	
Vo=1.5 V	-	-	2.6 A	
Vo=1.2 V	-	-	2.1 A	
Input Current (no load)	-	120 mA	180 mA	
Remote Off Input Current		10 mA	15 mA	
Input Reflected Ripple Current (pk-pk)	-	10 mA	15 mA	Tested with simulated source impedance of 10 uH, 5 Hz to 20 MHz; use a 100 uF /100 V electrolytic capacitor with ESR = 1 ohm max. at 200 kHz at 25 °C.
Input Reflected Ripple Current (rms)	-	1.5 mA	3 mA	
I ² t Inrush Current Transient	-	0.05 A ² s	0.1 A ² s	
Turn-on Voltage Threshold	32 V	34 V	35 V	
Turn-off Voltage Threshold	30 V	32 V	34 V	
Input over voltage Lockout	76 V	78 V	80 V	

Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point				
Vo=12 V	11.790 V	12.030 V	12.270 V	Vin=48 V, Io=50% full load
Vo=5.0 V	4.925 V	5.004 V	5.075 V	
Vo=3.3 V	3.260 V	3.308 V	3.360 V	
Vo=2.5 V	2.450 V	2.503 V	2.550 V	
Vo=1.8 V	1.770 V	1.808 V	1.844 V	
Vo=1.5 V	1.477 V	1.500 V	1.523 V	
Vo=1.2 V	1.176 V	1.200 V	1.224 V	
Line Regulation				
Vo=12 V	-	±8 mV	±15 mV	
Vo=5.0 V	-	±5 mV	±15 mV	
Vo=1.2 V-3.3 V	-	±3 mV	±6 mV	
Load Regulation				
Vo=5.0 V-12 V	-	±10 mV	±20 mV	
Vo=2.5 V-3.3 V	-	±5 mV	±10 mV	
Vo=1.2 V-1.8 V	-	±2 mV	±5 mV	
Regulation Over Temperature (-40 °C to +85 °C)				
Vo=12 V	-	±60 mV	±100 mV	
Vo=5.0 V	-	±40 mV	±65 mV	
Vo=3.3 V	-	±30 mV	±50 mV	
Vo=2.5 V	-	±20 mV	±40 mV	
Vo=1.8 V-1.2 V	-	±15 mV	±30 mV	
Output Current				
Vo=12 V	0 A	-	12 A	
Vo=5.0 V	0 A	-	30 A	
Vo=3.3 V	0 A	-	46 A	
Vo=1.2 V-2.5 V	0 A	-	50 A	

ISOLATED DC/DC CONVERTERS

48 V Input 12 V/12 A, 3.3 V/46 A, 5 V/30 A, 1.2 V - 2.5 V/50 A



Output Specifications (continued)

Parameter		Min	Typ	Max	Notes
Current Limit Threshold		Vo=12 V	14 A	15.5 A	18 A
		Vo=5.0 V	35 A	40 A	45 A
		Vo=3.3 V	50 A	60 A	65 A
		Vo=1.2 V-2.5 V	55 A	60 A	65 A
Short Circuit Surge Transient		-	3 A ² s	5 A ² s	
Ripple and Noise (rms)		Vo=12 V	-	25 mV	30 mV
		Vo=5.0 V	-	20 mV	25 mV
		Vo=3.3 V	-	20 mV	20 mV
		Vo=1.2 V-2.5 V	-	15 mV	20 mV
Ripple and Noise (pk-pk)		Vo=12 V	-	70 mV	90 mV
		Vo=5.0 V	-	60 mV	80 mV
		Vo=3.3 V	-	50 mV	70 mV
		Vo=1.8 V	-	45 mV	60 mV
		Vo=2.5 V	-	40 mV	60 mV
		Vo=1.5 V	-	55 mV	70 mV
		Vo=1.2 V	-	40 mV	60 mV
Turn on Time		10 mS	-	100 mS	
Overshoot at Turn on		-	0%	5%	
Output Capacitance		Vo=12.0 V	0 uF	-	2200 uF
		Vo=5.0 V	0 uF	-	10000 uF
		Vo=1.2 V-3.3 V	0 uF	-	20000 uF
Transient Response					
50% ~ 75% Max Load	Overshoot	Vo=12.0 V	-	600 mV	800 mV
	Settling Time		-	200 uS	300 uS
75% ~ 50% Max Load	Overshoot		-	600 mV	800 mV
	Settling Time		-	200 uS	300 uS
50% ~ 75% Max Load	Overshoot	Vo=5.0 V	-	250 mV	375 mV
	Settling Time		-	100 uS	200 uS
75% ~ 50% Max Load	Overshoot		-	250 mV	375 mV
	Settling Time		-	100 uS	200 uS
50% ~ 75% Max Load	Overshoot	Vo=3.3 V	-	100 mV	200 mV
	Settling Time		-	200 uS	300 uS
75% ~ 50% Max Load	Overshoot		-	100 mV	200 mV
	Settling Time		-	200 uS	300 uS
50% ~ 75% Max Load	Overshoot	Vo=2.5 V	-	100 mV	200 mV
	Settling Time		-	300 uS	400 uS
75% ~ 50% Max Load	Overshoot		-	100 mV	200 mV
	Settling Time		-	300 uS	400 uS
50% ~ 75% Max Load	Overshoot	Vo=1.8 V Vo=1.5 V	-	100 mV	140 mV
	Settling Time		-	200 uS	300 uS
75% ~ 50% Max Load	Overshoot		-	100 mV	140 mV
	Settling Time		-	200 uS	300 uS
50% ~ 75% Max Load	Overshoot	Vo=1.2 V	-	100 mV	120 mV
	Settling Time		-	200 uS	300 uS
75% ~ 50% Max Load	Overshoot		-	100 mV	120 mV
	Settling Time		-	200 uS	300 uS

Note: All specifications are typical at nominal input, full load at 25 °C unless noted.

ISOLATED DC/DC CONVERTERS

48 V Input 12 V/12 A, 3.3 V/46 A, 5 V/30 A, 1.2 V - 2.5 V/50 A



General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				Vin=48 V, full load, Ta=25 °C
Vo=12 V	90%	93%	-	
Vo=5.0 V	89%	92.5%	-	
Vo=3.3 V	88%	91%	-	
Vo=2.5 V	87%	90.5%	-	
Vo=1.8 V	85%	88%	-	
Vo=1.5 V	82%	85%	-	
Vo=1.2 V	80%	83%	-	
Switching Frequency	280 kHz	330 kHz	380 kHz	
Isolation capacitance	-	1500 pF	-	
Input to Output Isolation Voltage	-	-	2000 V	
Remote Sense Compensation	-	-	10% Vo	The total voltage increased by trim and remote sense should not exceed 10%Vo.
Output Voltage Trim Range	80% Vo	-	110% Vo	
Over Temperature Protection	-	125 °C	-	
Over Voltage Protection	-	130% Vo	-	Vin=48V, full load, Hiccup mode
MTBF	TBD			Calculated Per Bell Core SR-332 (Io = Nominal; Ta = 25 °C)
Dimensions	2.30 x 1.45 x 0.395 58.42 x 36.83 x 10.03			
	Inches			
	millimeters			
Weight	-	41 g	-	

Control Specifications

Parameter	Min	Typ	Max	Notes	
Remote On/Off					
Signal Low (Unit On)	Active Low	-0.3 V	-	0.8 V	0RQB-C5TxxL. The remote on/off pin open, Unit off.
Signal High (Unit Off)		2.4 V	-	18 V	
Signal Low (Unit Off)	Active High	-0.3 V	-	0.8 V	0RQB-C5Txx0. The remote on/off pin open, Unit on.
Signal High (Unit On)		2.4 V	-	18 V	
Current Sink		0 mA	-	0.75 mA	

ISOLATED DC/DC CONVERTERS

48 V Input 12 V/12 A, 3.3 V/46 A, 5 V/30 A, 1.2 V - 2.5 V/50 A



Output Trim Equations

Equations for calculating the trim resistor are shown below (Unit: kΩ). The Trim Down resistor should be connected between the Trim pin and Ground pin. The Trim Up resistor should be connected between the Trim pin and the Vout. Only one of the resistors should be used for any given application.


1) For $V_o=1.5\text{ V} - 12\text{ V}$:

$$R_{trimdown} = \frac{511}{|\delta|} - 10.22$$

$$R_{trimup} = \frac{(100 + \delta) \cdot V_o \cdot 5.11 - 626}{1.225 \cdot \delta} - 10.22$$

Note:

$$\delta = \frac{(V_{o_req} - V_o)}{V_o} \times 100[\%]$$

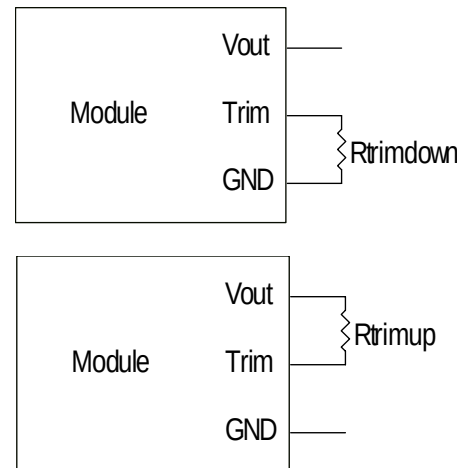

V_{o_req} =Desired (trimmed) output voltage [V]; V_o =output voltage
 $V_o=12.004\text{ V}$ for 12 V output; $V_o=5\text{ V}$ for 5.004 V output; $V_o=3.308\text{ V}$ for 3.3 V output; $V_o=2.503\text{ V}$ for 2.5 V output; $V_o=1.808\text{ V}$ for 1.8 V output; $V_o=1.503\text{ V}$ for 1.5 V output

2) For $V_o=1.2\text{ V}$:

$$R_{trimdown} = \frac{511}{|\delta|} - 10.22$$

$$R_{trimup} = \frac{(100 + \delta) \cdot V_o \cdot 5.11 - 313}{0.6125 \cdot \delta} - 10.22$$

Note:

$$\delta = \frac{(V_{o_req} - V_o)}{V_o} \times 100[\%]$$


V_{o_req} =Desired (trimmed) output voltage [V]; V_o =output voltage
 $V_o=1.202\text{ V}$ for 1.2 V output

ISOLATED DC/DC CONVERTERS


48 V Input 12 V/12 A, 3.3 V/46 A, 5 V/30 A, 1.2 V - 2.5 V/50 A




Efficiency Data

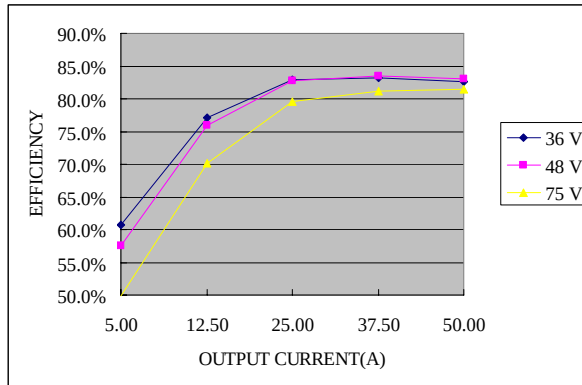


0RQB-C5TV2x

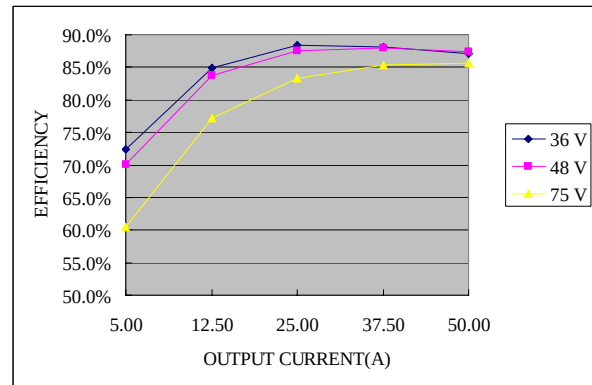


0RQB-C5TV5x

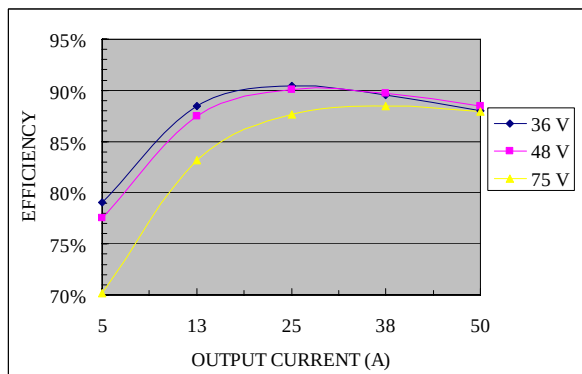


0RQB-C5TV8x

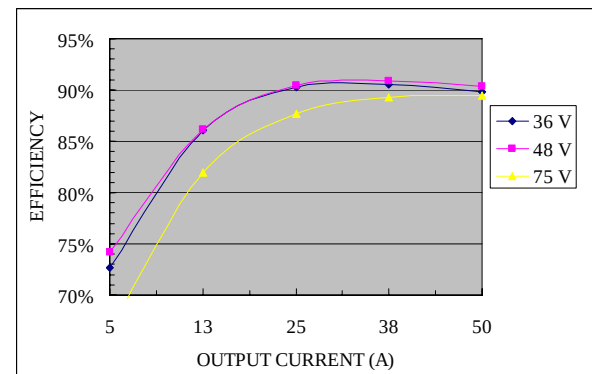

0RQB-C5T02x

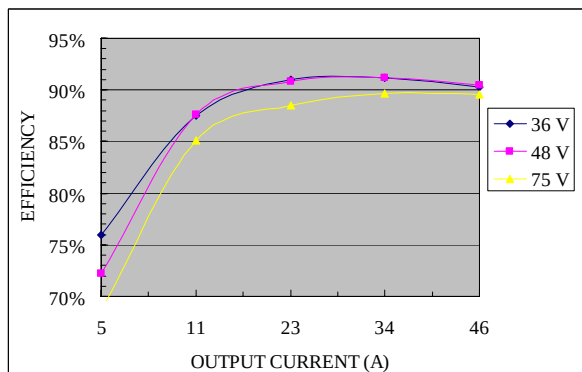

0RQB-C5T03x

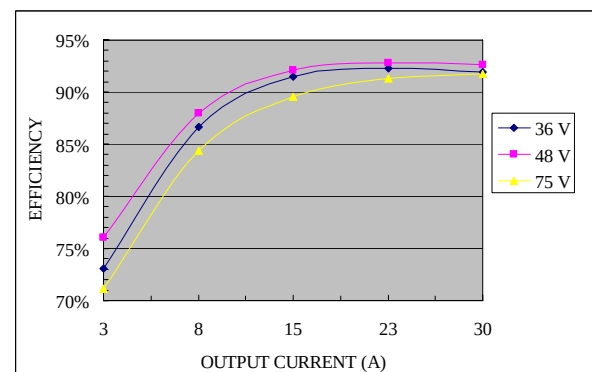


0RQB-C5T05x

ISOLATED DC/DC CONVERTERS

48 V Input 12 V/12 A, 3.3 V/46 A, 5 V/30 A, 1.2 V - 2.5 V/50 A

bel
POWER PRODUCTS


Efficiency Data (continued)

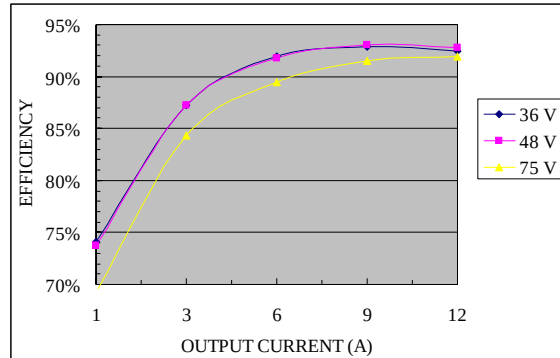


0RQB-C5T12x

Thermal Derating Curves


Vin=48V, with maximum junction temperature of semiconductors derated to 120 degree C.

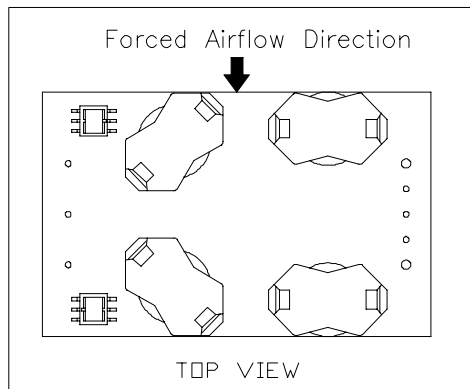


0RQB-C5Txxx

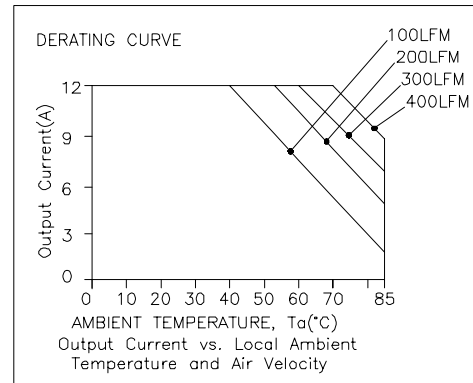

0RQB-C5T12x

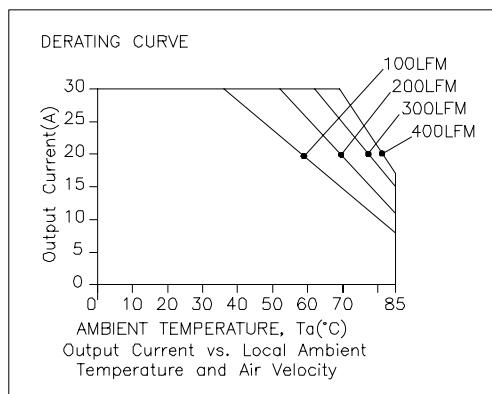

0RQB-C5T05x

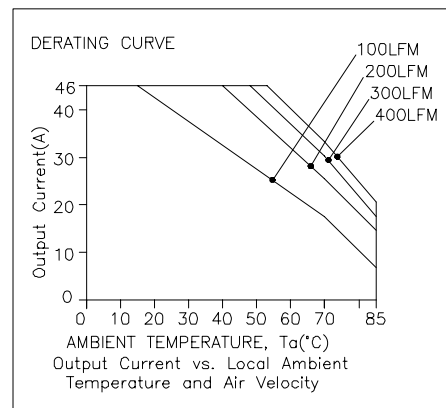


0RQB-C5T03x

ISOLATED DC/DC CONVERTERS


48 V Input 12 V/12 A, 3.3 V/46 A, 5 V/30 A, 1.2 V - 2.5 V/50 A

bel
POWER PRODUCTS


Thermal Derating Curves (continued)

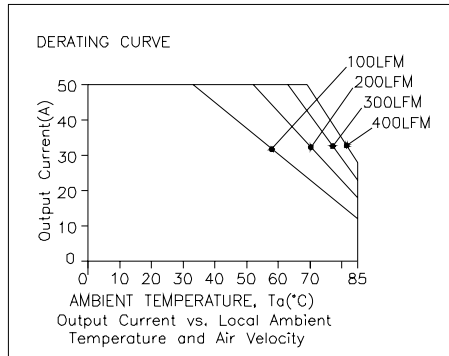


0RQB-C5T02x

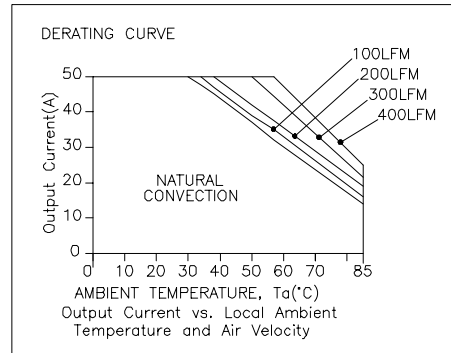

0RQB-C5TV8x

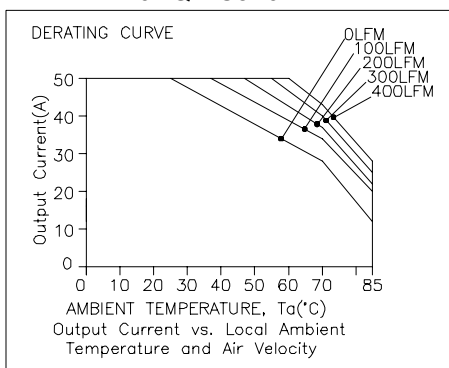


0RQB-C5TV5x

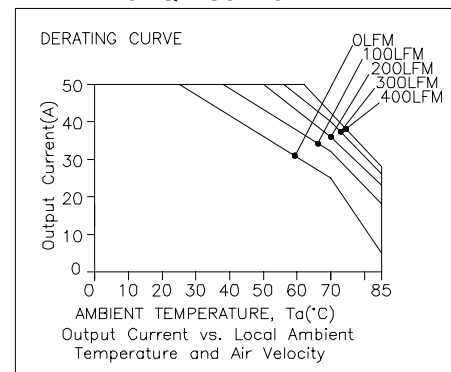

0RQB-C5TV2x

Thermal Reference

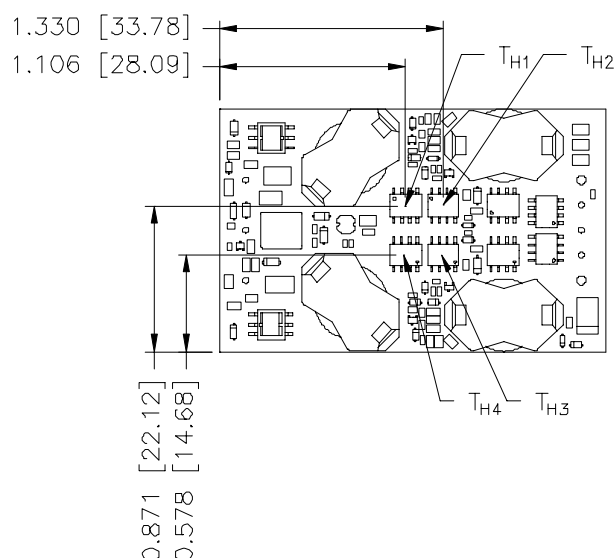


Note: T_{H1} , T_{H2} , T_{H3} and T_{H4} are hot spots which should not exceed 115 degree C.

ISOLATED DC/DC CONVERTERS


48 V Input 12 V/12 A, 3.3 V/46 A, 5 V/30 A, 1.2 V - 2.5 V/50 A




Ripple and Noise Waveforms

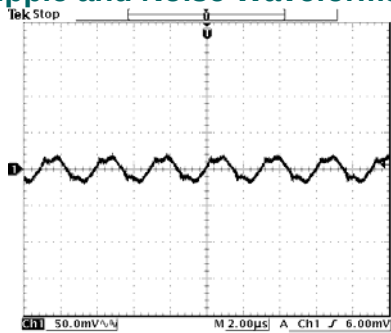


Ripple and noise at full load, 1.2 V/50 A output

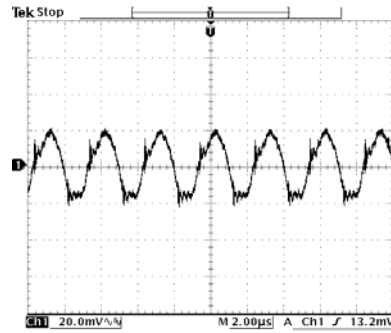


Ripple and noise at full load, 1.5 V/50 A output

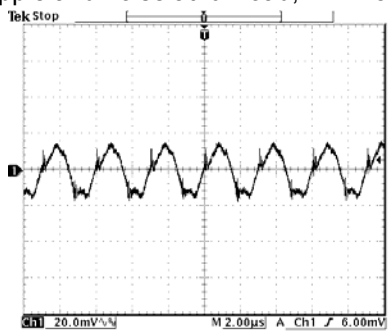


Ripple and noise at full load, 1.8 V/50 A output

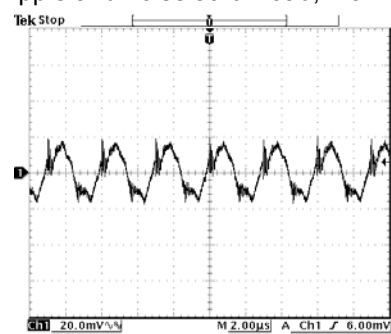


Ripple and noise at full load, 2.5 V/45 A output

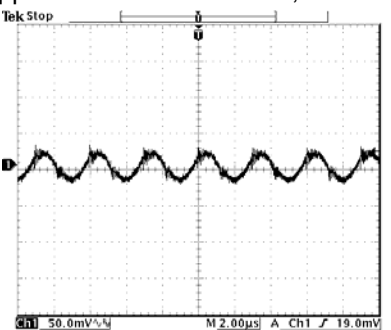

Ripple and noise at full load, 3.3 V/46 A output

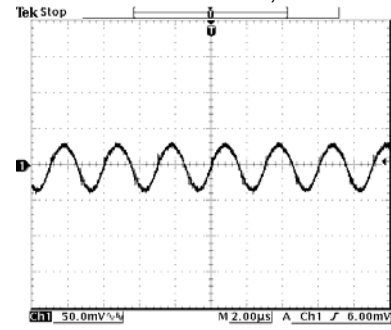

Ripple and noise at full load, 5.0 V/30 A output

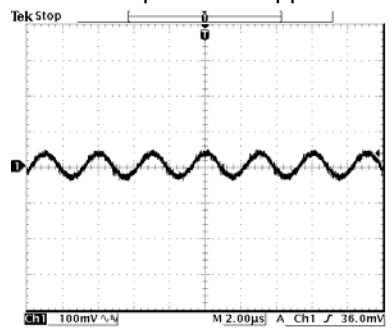

Ripple and noise at full load, 12 V/12 A output


Note: Ripple and noise is tested with a 1 μ F ceramic cap and a 10 μ F tantalum capat output, $T_a=25$ deg C.

ISOLATED DC/DC CONVERTERS


48 V Input 12 V/12 A, 3.3 V/46 A, 5 V/30 A, 1.2 V - 2.5 V/50 A




Transient Response Waveforms

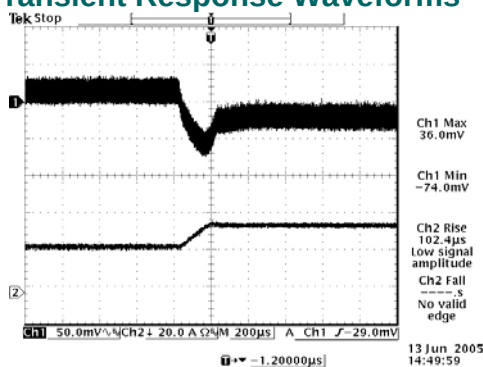


Vout= 1.2 V 50%-75% Load Transients

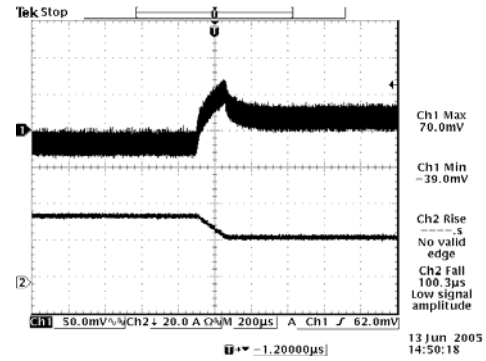


Vout= 1.2 V 75%-50% Load Transients

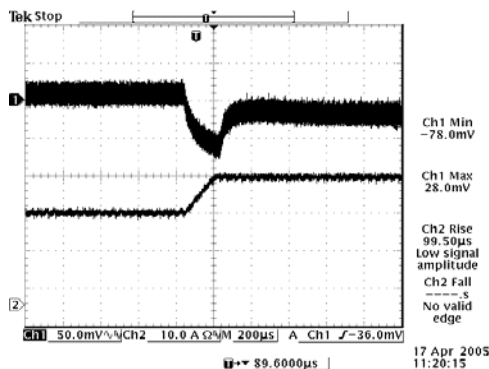


Vout= 1.5 V 50%-75% Load Transients

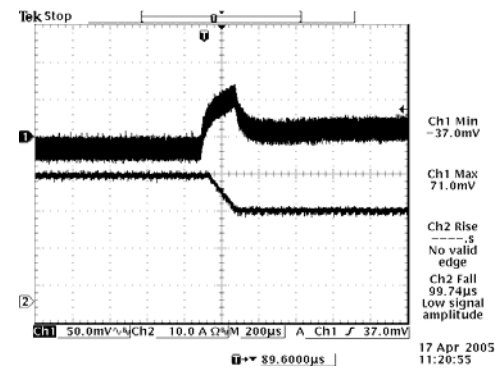


Vout= 1.5 V 75%-50% Load Transients

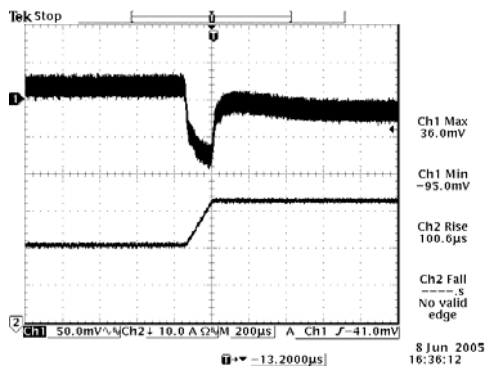


Vout= 1.8 V 50%-75% Load Transients

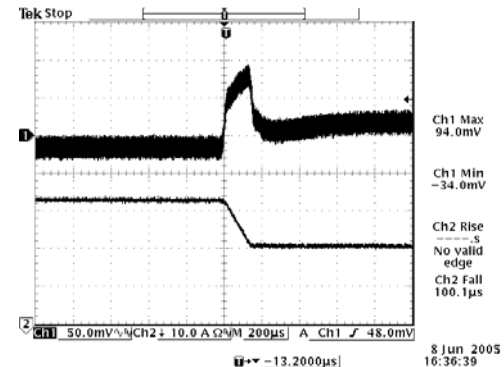

Vout= 1.8 V 75%-50% Load Transients

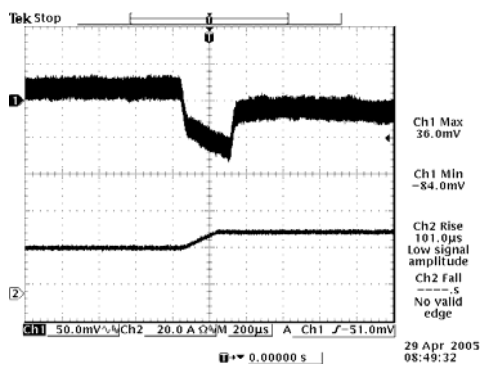

Vout= 2.5 V 50%-75% Load Transients

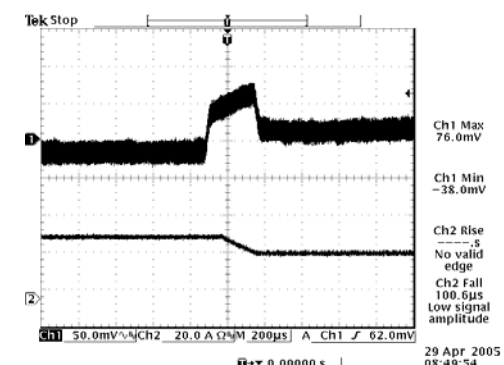


Vout= 2.5 V 75%-50% Load Transients

ISOLATED DC/DC CONVERTERS


48 V Input 12 V/12 A, 3.3 V/46 A, 5 V/30 A, 1.2 V - 2.5 V/50 A




Transient Response Waveforms (continued)

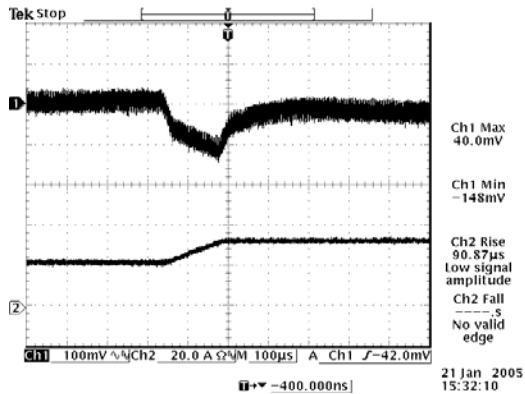


Vout= 3.3 V 50%-75% Load Transients

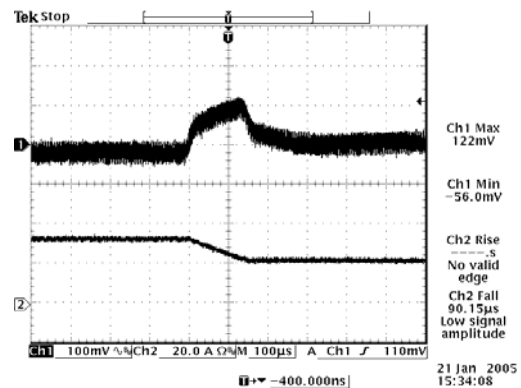


Vout= 3.3 V 75%-50% Load Transients

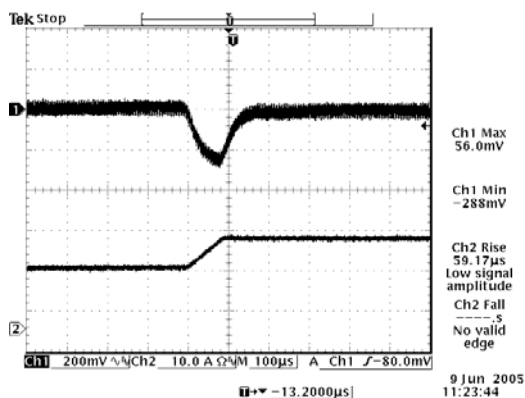


Vout= 5.0 V 50%-75% Load Transients

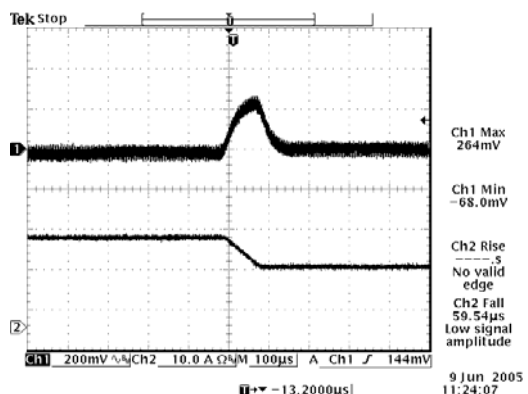

Vout= 5.0 V 75%-50% Load Transients

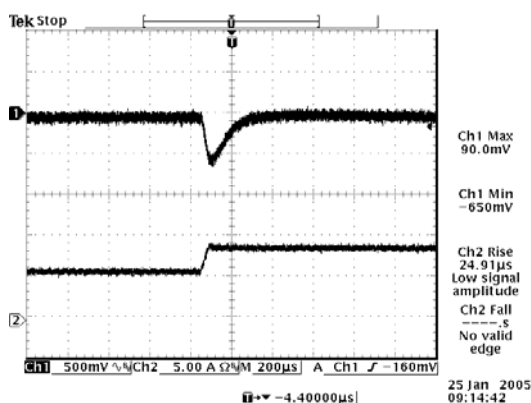

Vout= 12 V 50%-75% Load Transients

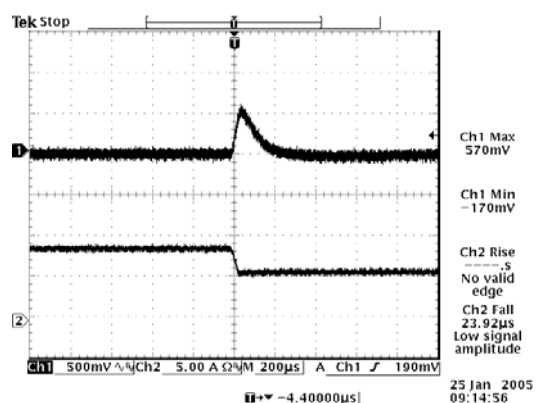



Vout= 12 V 75%-50% Load Transients

ISOLATED DC/DC CONVERTERS


48 V Input 12 V/12 A, 3.3 V/46 A, 5 V/30 A, 1.2 V - 2.5 V/50 A



Mechanical Outline

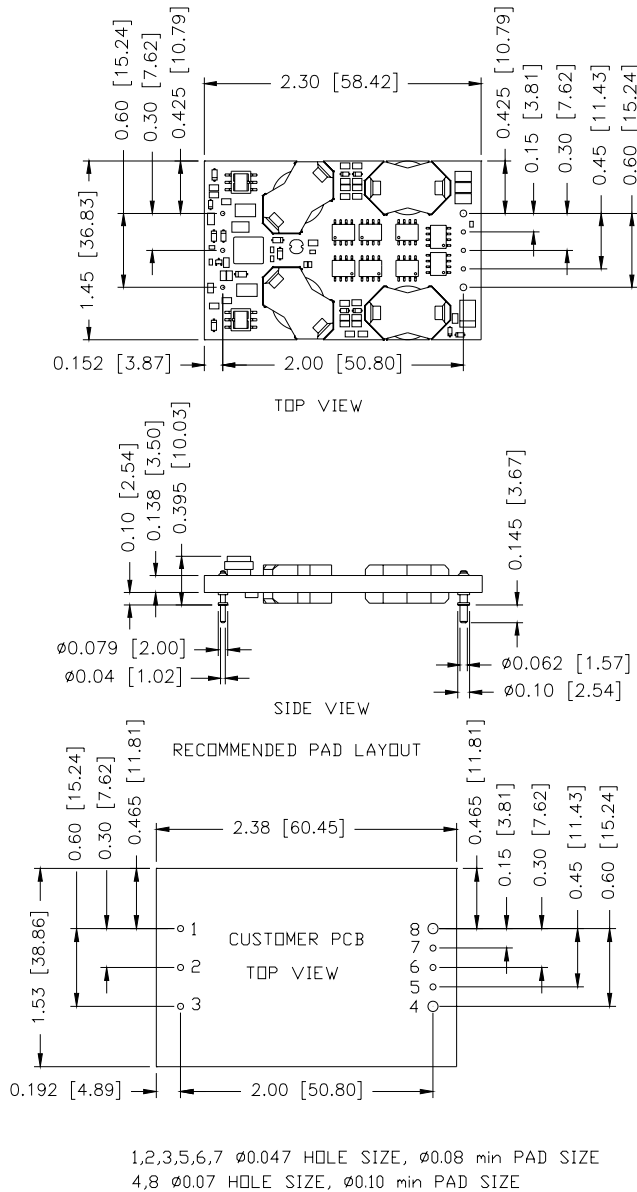

BOTTOM VIEW

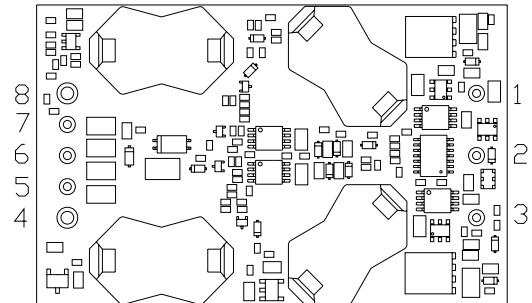

BOTTOM VIEW

Pin Connections

Pin	Function	Pin Size
1	Vin (+)	0.04"
2	Remote On/Off	0.04"
3	Vin (-)	0.04"
4	Vout (-)	0.062"
5	Remote Sense (-)	0.04"
6	Trim	0.04"
7	Remote Sense (+)	0.04"
8	Vout (+)	0.062"

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2006 Bel Fuse Inc. Specifications subject to change without notice. 032806

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com