

M3 SERIES

P10CU-XXXXZ 1KV ISOLATED 2W UNREGULATED DUAL OUTPUT SIP7

Available Inputs:

5, 12, 24 and 48 VDC

Available Outputs:

(+/-) 5, 7.2, 12 and 15 VDC

Other specifications please enquire

Electrical Specifications

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications

Voltage range

+/- 10 %

Filter

Capacitors

Isolation Specifications

Rated voltage

1000 VDC

Leakage current

1 mA

Resistance

10⁹ Ohm

Capacitance

60 pF typ.

Output Specifications

Voltage accuracy

+/- 5 %, max.

Ripple and noise (at 20 MHz BW)

75 mV p-p, max.

Short circuit protection

Momentary

Line voltage regulation

+/- 1,2 % / 1,0 % of Vin

Load voltage regulation

+/- 8 %, load = 20 ~ 100 %

Temperature coefficient

+/- 0,02 % / °C

General Specifications

Efficiency

70 % to 85 %

Switching frequency

85 KHz, typ.

Environmental Specifications

Operating temperature (ambient)

- 40° C to + 85° C

Storage temperature

- 55 °C to + 125 °C

Derating

See graph

Humidity

Up to 90 %, non condensing

Cooling

Free air convection

Physical Characteristics

Dimensions SIP

19,50 x 6,00 x 9,50 mm

0,76 x 0,24 x 0,37 inches

Weight

2,5 g 3,5 g for 48 VDC


Case material

Non conductive black plastic


Examples of Partnumbers/Modelcode

PART NO.	INPUT VOLTAGE (VDC)	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
P10CU-0505Z	5	28	555	+/- 5	+/- 200	72
P10CU-0512Z	5	26	500	+/- 12	+/- 84	80
P10CU-0515Z	5	25	494	+/- 15	+/- 67	81
P10CU-1205Z	12	22	225	+/- 5	+/- 200	74
P10CU-1212Z	12	20	208	+/- 12	+/- 84	80
P10CU-1215Z	12	20	208	+/- 15	+/- 67	80
P10CU-2405Z	24	11	111	+/- 5	+/- 200	75
P10CU-247R2Z	24	10	107	+/- 7,2	+/- 139	78
P10CU-2412Z	24	8	102	+/- 12	+/- 84	81
P10CU-2415Z	24	8	102	+/-15	+/- 67	82

Dimensions

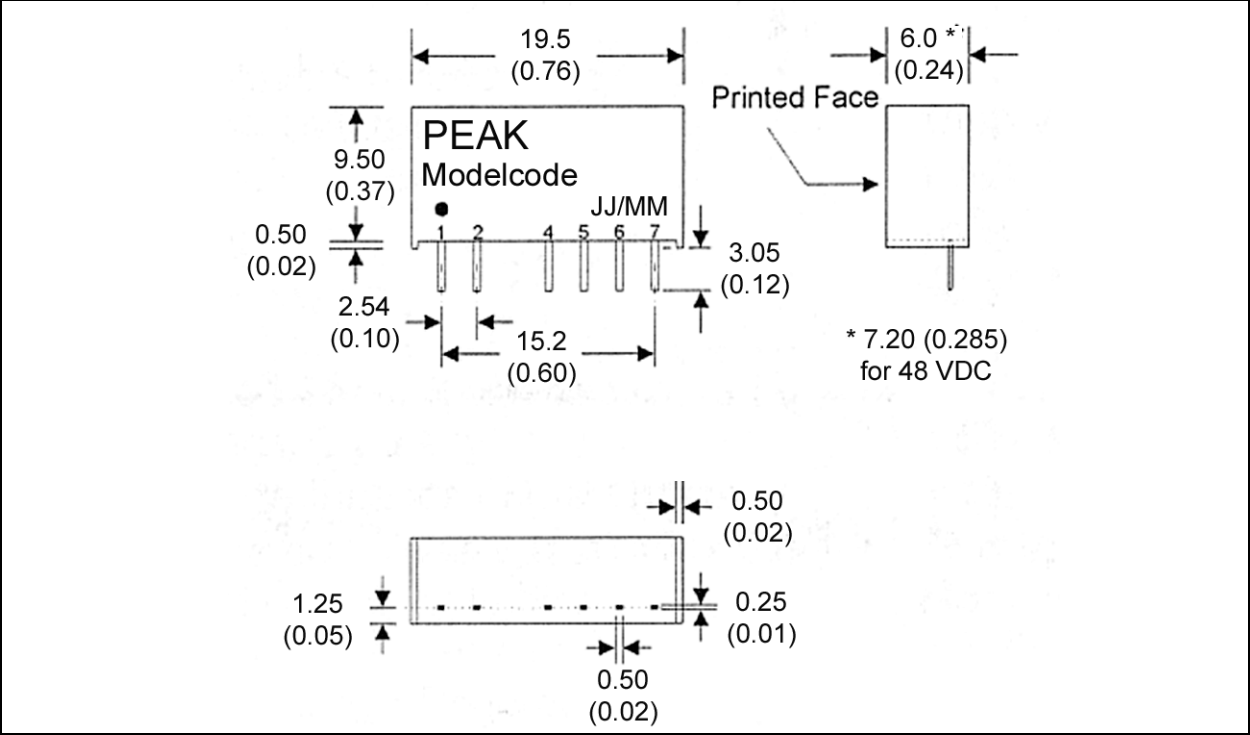

Derating Graph and Pinning

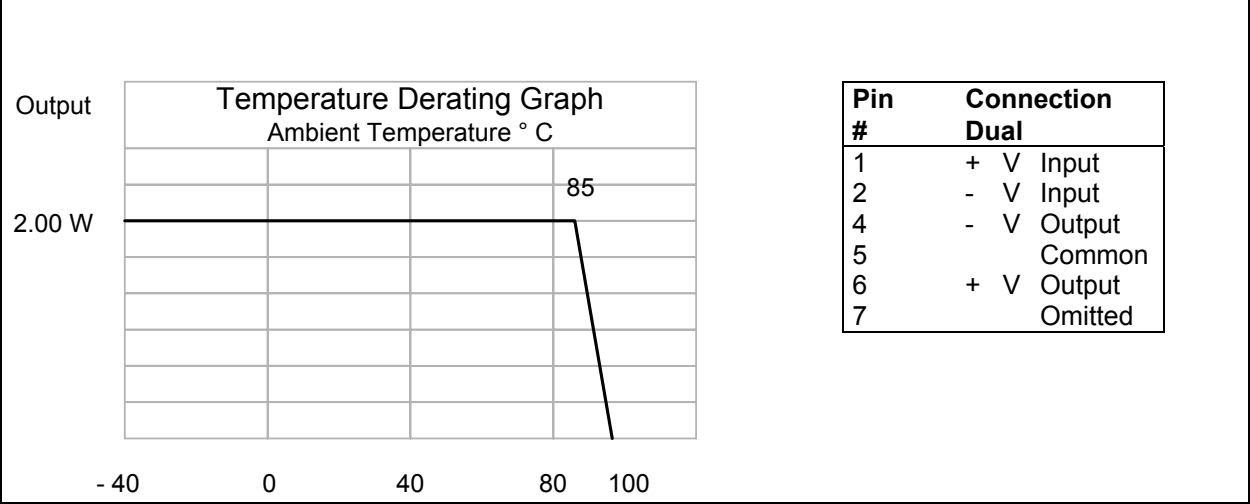

Specification can be changed without notice.

Copyright PEAK electronics GmbH