

UF200G ~ UF206G

GLASS PASSIVATED JUNCTION ULTRAFAST RECOVERY RECTIFIERS

VOLTAGE 50 to 600 Volts **CURRENT** 2.0 Amperes


DO-15 Unit: inch(mm)

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound
- Exceeds environmental standards of MIL-S-19500/228.
- Ultra Fast recovery for high efficiency.
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: Molded plastic, DO-15
- Terminals: Axial leads, solderable per MIL-STD-750, Method 2026
- Polarity: Band denotes cathode
- Mounting Position: Any
- Weight: 0.014 ounce, 0.397 gram

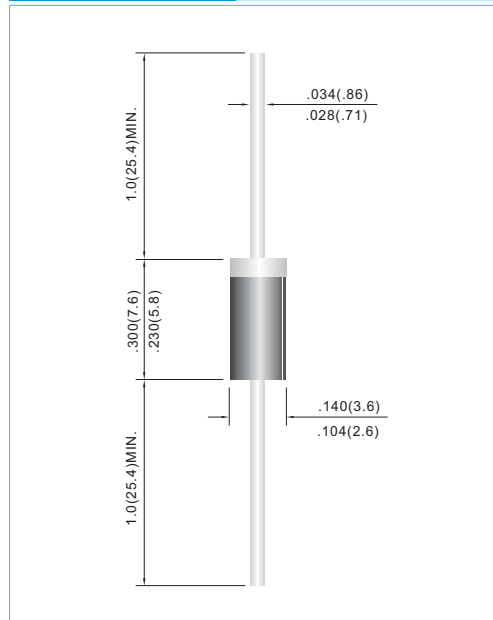

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

PARAMETER	SYMBOL	UF200G	UF201G	UF202G	UF204G	UF206G	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	V
Maximum Average Forward Current .375"(9.5mm) lead length at T _A =55°C	I _{F(AV)}	2.0					A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I _{FSM}	60					A
Maximum Forward Voltage at 2.0A	V _F	1.0			1.3	1.7	V
Maximum DC Reverse Current T _J =25°C at Rated DC Blocking Voltage T _J =125°C	I _R	1.0 200					μA
Typical Junction capacitance (Note 1)	C _J	35					pF
Typical Thermal Resistance(Note 2)	R _{θJA}	45					°C / W
Maximum Reverse Recovery Time (Note 3)	t _{rr}	50				100	ns
Operating Junction and Storage Temperature Range	T _J ,T _{STG}	-55 to +150					°C

NOTES:

- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
- Thermal Resistance from Junction to Ambient and from Junction to lead length 0.375"(9.5mm) P.C.B. mounted.
- Reverse Recovery Time $I_F=.5A$, $I_R=1A$, $t_{rr}=.25A$

UF200G ~ UF206G

RATING AND CHARACTERISTIC CURVES

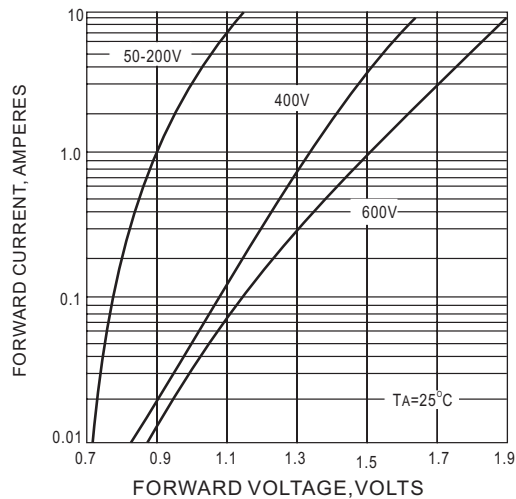


Fig.1 FORWARD CHARACTERISTICS

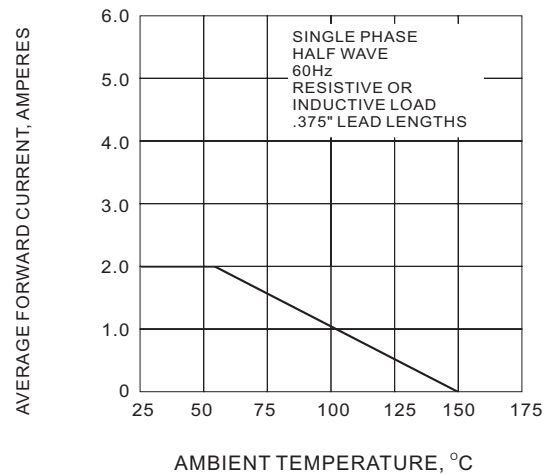


Fig.2 FORWARD CURRENT DERATING CURVE

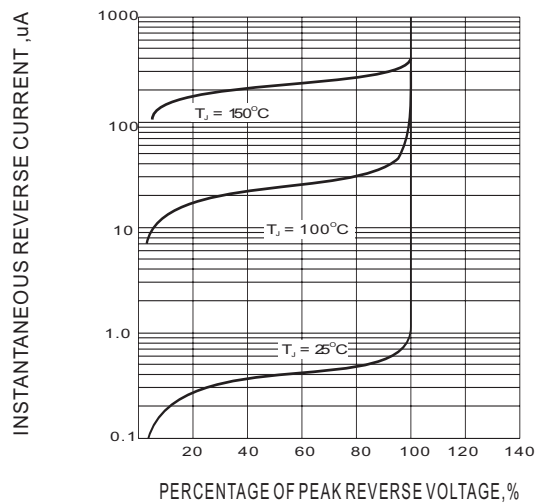


Fig.3 TYPICAL REVERSE CHARACTERISTIC

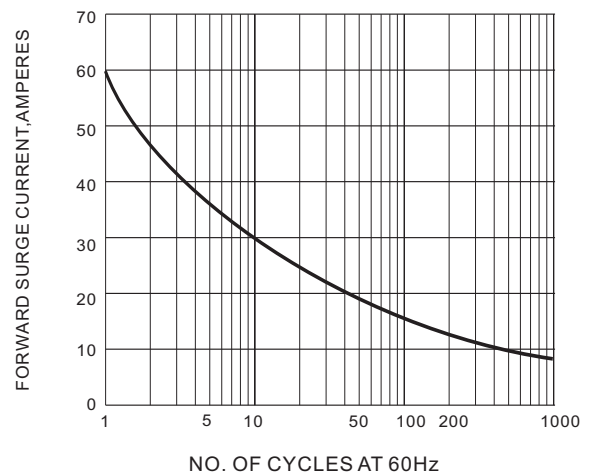


Fig.4 PEAK FORWARD SURGE CURRENT