


FEATURES

- Lower $R_{DS(on)}$
- Improved inductive ruggedness
- Fast switching times
- Rugged polysilicon gate cell structure
- Lower input capacitance
- Extended safe operating area
- Improved high temperature reliability

TO-3PF



1. Gate 2. Drain 3. Source

PRODUCT SUMMARY

Part Number	BV_{DSS}	$R_{DS(on)}$	I_D
IRFS240	200V	0.18Ω	12.5A
IRFS241	150V	0.18Ω	12.5A

ABSOLUTE MAXIMUM RATINGS

Characteristic	Symbol	IRFS240	IRFS241	Unit
Drain-Source Voltage (1)	V_{DSS}	200	150	Vdc
Drain-Gate Voltage ($R_{GS}=1.0M\Omega$)(1)	V_{DGR}	200	150	Vdc
Gate-Source Voltage	V_{GS}	± 20		Adc
Continuous Drain Current $T_c=25^\circ C$	I_D	12.5		Adc
Continuous Drain Current $T_c=100^\circ C$	I_D	8.8		Adc
Drain Current - Pulsed (3)	I_{DM}	72		Adc
Gate Current - Pulsed	I_{GM}	± 1.5		Adc
Single Pulsed Avalanche Energy (4)	EAS	230		mJ
Avalanche Current	IAS	12.5		A
Total Power Dissipation at $T_c=25^\circ C$	P_D	83		Watts
Derate Above $25^\circ C$		0.67		W/ $^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-55 to +150		$^\circ C$
Maximum Lead Temp. for Soldering Purposes, 1/8" from case for 5 seconds	T_L	300		$^\circ C$

Notes : (1) $T_J=25^\circ C$ to $150^\circ C$

(2) Pulse test : Pulse width $\leq 300\mu s$, Duty Cycle $\leq 2\%$

(3) Repetitive rating : Pulse width limited by junction temperature

(4) $L=2.7mH$, $V_{dd}=50V$, $R_G=25\Omega$, Starting $T_J=25^\circ C$

ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$ unless otherwise specified)

Symbol	Characteristic	Min	Typ	Max	Units	Test Conditions
BV _{DSS}	Drain-Source Breakdown Voltage					
	IRFS240	200	-	-	V	V _{GS} =0V, I _D =250 μ A
	IRFS241	150	-	-	V	
V _{GS(th)}	Gate Threshold Voltage	2.0	-	4.0	V	V _{DS} =V _{GS} , I _D =250 μ A
I _{SSS}	Gate-Source Leakage Forward	-	-	100	nA	V _{GS} =20V
I _{SSS}	Gate-Source Leakage Reverse	-	-	-100	nA	V _{GS} =-20V
I _{DSS}	Zero Gate Voltage Drain Current	-	-	250	μ A	V _{DS} =Max. Rating, V _{GS} =0V
		-	-	1000	μ A	V _{DS} =0.8 Max. Rating, V _{GS} =0V, T _C =150 $^\circ\text{C}$
R _{DS(on)}	Static Drain-Source On-Resistance(2)	-	-	0.18	Ω	V _{GS} =10V, I _D =9A
g _{fs}	Forward Transconductance (2)	6.0	-	-	S	V _{DS} $\geq$ 50V, I _D =9A
C _{iss}	Input Capacitance	-	1400	-	pF	V _{GS} =0V, V _{DS} =25V, f=1MHz
C _{oss}	Output Capacitance	-	240	-	pF	
C _{rss}	Reverse Transfer Capacitance	-	95	-	pF	
t _{d(on)}	Turn-On Delay Time	-	-	30	ns	V _{DD} =0.5 BV _{DSS} , I _D =18A, Z _o =9.1 Ω (MOSFET switching times are essentially independent of operating temperature)
t _r	Rise Time	-	-	60	ns	
t _{d(off)}	Turn-Off Delay Time	-	-	80	ns	
t _f	Fall Time	-	-	60	ns	
Q _g	Total Gate Charge (Gate-Source Plus Gate-Drain)	-	-	64	nC	V _{GS} =10V, I _D =18A, V _{DS} =0.8 Max. Rating (Gate charge is essentially independent of operating temperature)
Q _{gs}	Gate-Source Charge	-	12.5	-	nC	
Q _{gd}	Gate-Drain ("Miller") Charge	-	25.3	-	nC	

THERMAL RESISTANCE

Symbol	Characteristics		All	Units	Remark
R _{thJC}	Junction-to-Case	MAX	1.5	K/W	
R _{thCS}	Case-to-Sink	TYP	0.24	K/W	Mounting surface flat
R _{thJA}	Junction-to-Ambient	MAX	40	K/W	Free Air Operation





Notes : (1) T_J=25 $^\circ\text{C}$ to 150 $^\circ\text{C}$ (2) Pulse test : Pulse width $\leq$ 300 μ s, Duty Cycle $\leq$ 2%


(3) Repetitive rating : Pulse width limited by junction temperature

SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS


Symbol	Characteristic	Min	Typ	Max	Units	Test Conditions
I_S	Continuous Source Current (Body Diode)	-	-	18	A	Modified MOSFET symbol showing the integral reverse P-N junction rectifier
I_{SM}	Pulse Source Current (Body Diode) (3)	-	-	72	A	
V_{SD}	Diode Forward Voltage (2)	-	-	2.0	V	$T_J=25^\circ\text{C}$, $I_S=18\text{A}$, $V_{GS}=0\text{V}$
t_{rr}	Reverse Recovery Time	-	650	-	ns	$T_J=25^\circ\text{C}$, $I_F=18\text{A}$, $dI_F/dt=100\text{A}/\mu\text{S}$

- Notes : (1) $T_J=25^\circ\text{C}$ to 150°C
 (2) Pulse test : Pulse width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$
 (3) Repetitive rating : Pulse width limited by junction temperature

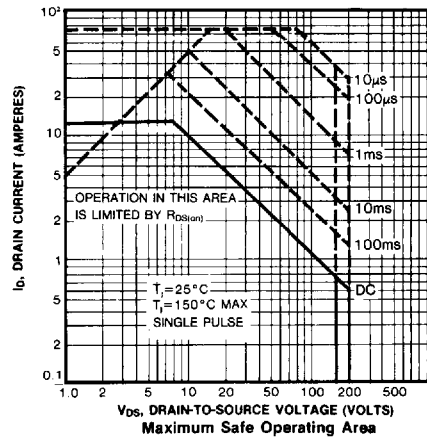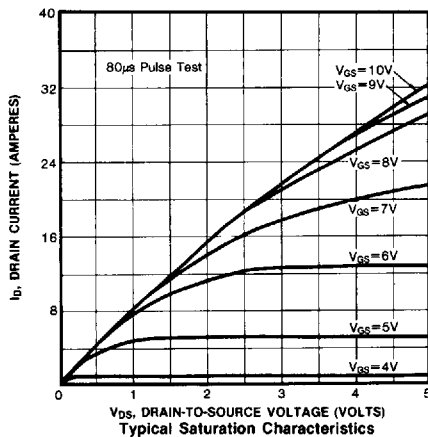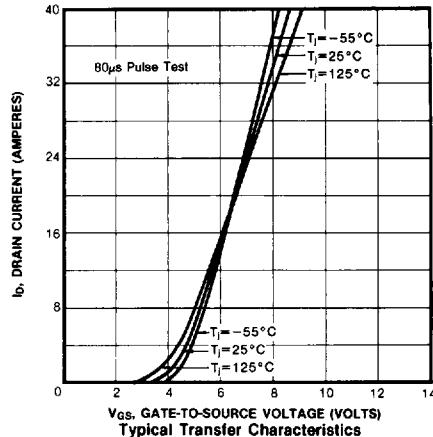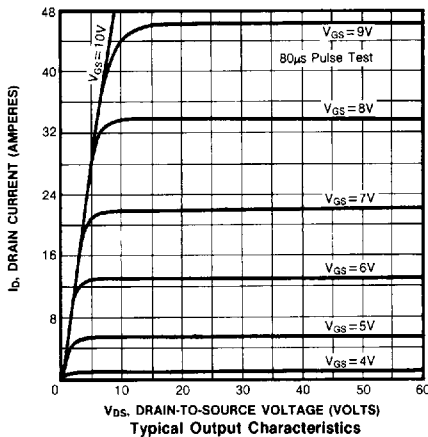


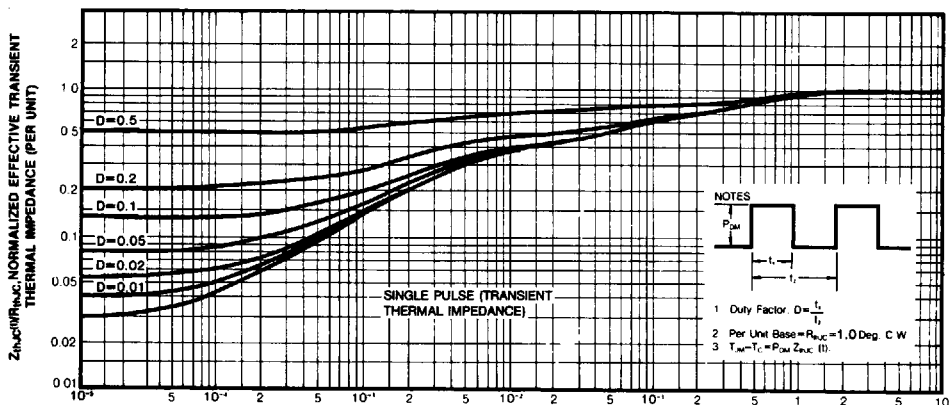


11. SQUARE WAVE PULSE DURATION (SECONDS)
Maximum Effective Transient Thermal Impedance Junction-to-Case Vs. Pulse Duration

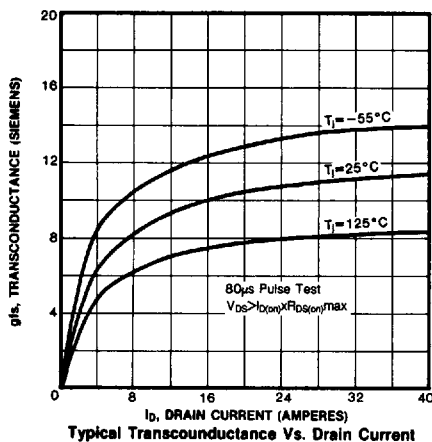


Typical Transconductance Vs. Drain Current

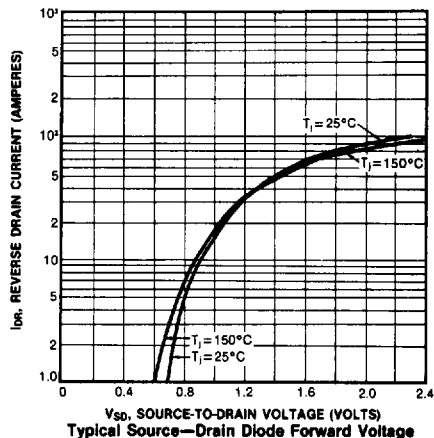

Typical Source-Drain Diode Forward Voltage

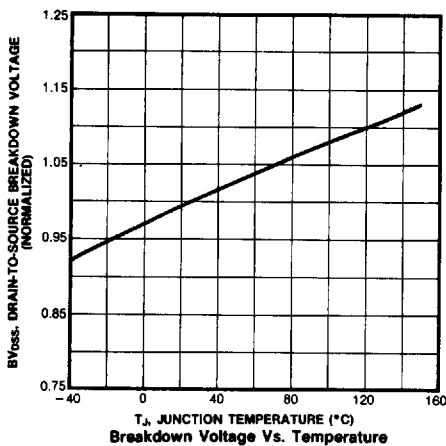

Breakdown Voltage Vs. Temperature

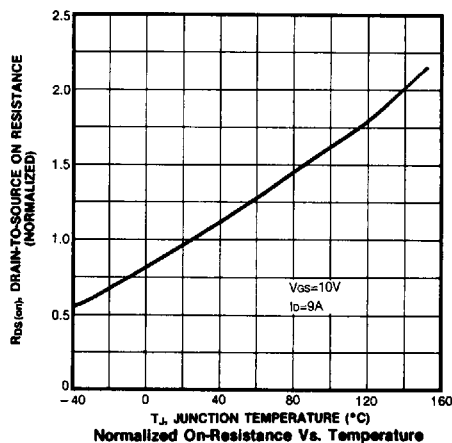

Normalized On-Resistance Vs. Temperature

