

Features

- 144 Pin JEDEC Standard, 8 Byte Small Outline Dual In-line Memory Module with 8 Byte busses
- 4Mx64 Extended Data Out SO DIMM
- Performance:

		-50	-60
t_{RAC}	RAS Access Time	60ns	70ns
t_{CAC}	CAS Access Time	13ns	15ns
t_{AA}	Access Time From Address	25ns	30ns
t_{RC}	Cycle Time	84ns	104ns
t_{HPC}	EDO Mode Cycle Time	20ns	25ns

- All inputs and outputs are LVTTTL (3.3V) compatible
- Single 3.3V $\pm$ 0.3V Power Supply
- Au contacts

- Optimized for byte-write non-parity applications
- System Performance Benefits:
 - Reduced noise (18 V_{SS}/18V_{CC} pins)
 - Byte write, byte read accesses
 - Serial PDs
- Extended Data Out (EDO) Mode, Read-Modify-Write Cycles
- Refresh Modes: $\overline{RAS}$ -Only, CBR Hidden Refresh, and Self Refresh
- 4096 refresh cycles distributed across 256ms
- 12/10 addressing (Row/Column)
- Card size: 2.66" x 1.0" x 0.149"
- DRAMS in TSOP Package

Description


IBM11T4645MP is an industry standard 144-pin 8-byte Small Outline Dual In-line Memory Module (SO DIMM) which is organized as a 4Mx64 high speed memory array designed for use in non-parity applications. The SO DIMM uses 4 4Mx16 EDO DRAMs in TSOP packages. The use of EDO DRAMs allows for a reduction in Page Mode Cycle time from 40ns (Fast Page) to 15ns for 60ns EDO modules.

This card uses *serial presence detects* implemented via a serial EEPROM using the two pin I²C Protocol. This communication protocol uses CLOCK (SCL)

and DATA I/O (SDA) lines to synchronously clock data between the master (ex: The System Microprocessor) and the slave EEPROM device. The device address for the EEPROM is set to zero at the card. The first 128 bytes are utilized by the SO DIMM manufacturer and the second 128 bytes are available to the end user.

All IBM 144-pin SO DIMMs provide a high performance, flexible 8-byte interface in a 2.66" long space-saving footprint. Related products are the 1Mx64, 2Mx64 and the x72 (ECC) SO DIMMs.

Card Outline

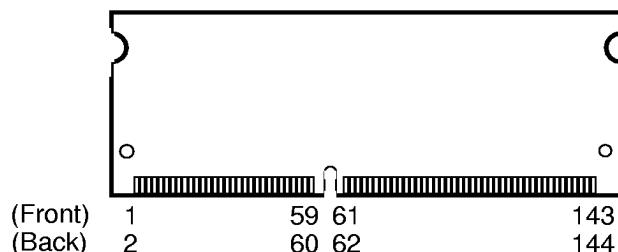



Pin Description

RAS0	Row Address Strobe
CAS0 - CAS7	Column Address Strobe
WE	Read/write Input
OE	Output Enable
A0 - A11	Address Inputs
DQ0 - DQ63	Data Input/Output
V _{CC}	Power (3.3V)
V _{SS}	Ground
NC	No Connect
SCL	Serial Presence Detect Clock Input
SDA	Serial Presence Detect Data Input

Pinout


Pin#	Front Side	Pin#	Back Side	Pin#	Front Side	Pin#	Back Side
1	V _{SS}	2	V _{SS}	73	OE	74	NC
3	DQ0	4	DQ32	75	V _{SS}	76	V _{SS}
5	DQ1	6	DQ33	77	NC	78	NC
7	DQ2	8	DQ34	79	NC	80	NC
9	DQ3	10	DQ35	81	V _{CC}	82	V _{CC}
11	V _{CC}	12	V _{CC}	83	DQ16	84	DQ48
13	DQ4	14	DQ36	85	DQ17	86	DQ49
15	DQ5	16	DQ37	87	DQ18	88	DQ50
17	DQ6	18	DQ38	89	DQ19	90	DQ51
19	DQ7	20	DQ39	91	V _{SS}	92	V _{SS}
21	V _{SS}	22	V _{SS}	93	DQ20	94	DQ52
23	CAS0	24	CAS4	95	DQ21	96	DQ53
25	CAS1	26	CAS5	97	DQ22	98	DQ54
27	V _{CC}	28	V _{CC}	99	DQ23	100	DQ55
29	A0	30	A3	101	V _{CC}	102	V _{CC}
31	A1	32	A4	103	A6	104	A7
33	A2	34	A5	105	A8	106	A11
35	V _{SS}	36	V _{SS}	107	V _{SS}	108	V _{SS}
37	DQ8	38	DQ40	109	A9	110	A12
39	DQ9	40	DQ41	111	A10	112	A13
41	DQ10	42	DQ42	113	V _{CC}	114	V _{CC}
43	DQ11	44	DQ43	115	CAS2	116	CAS6
45	V _{CC}	46	V _{CC}	117	CAS3	118	CAS7
47	DQ12	48	DQ44	119	V _{SS}	120	V _{SS}
49	DQ13	50	DQ45	121	DQ24	122	DQ56
51	DQ14	52	DQ46	123	DQ25	124	DQ57
53	DQ15	54	DQ47	125	DQ26	126	DQ58
55	V _{SS}	56	V _{SS}	127	DQ27	128	DQ59
57	NC	58	NC	129	V _{CC}	130	V _{CC}
59	NC	60	NC	131	DQ28	132	DQ60
VOLTAGE KEY				133	DQ29	134	DQ61
61	DU	62	DU	135	DQ30	136	DQ62
63	V _{CC}	64	V _{CC}	137	DQ31	138	DQ63
65	DU	66	DU	139	V _{SS}	140	V _{SS}
67	WE	68	NC	141	SDA	142	SCL
69	RAS0	70	NC	143	V _{CC}	144	V _{CC}
71	NC	72	NC				

Note: All pin assignments are consistent for all 8 Byte versions.

Ordering Information

Part Number	Organization	Speed	Leads	Dimension	Power
IBM11T4645MP-50	4Mx64	50ns	Au	2.66"x1.0"x 0.149"	3.3V
IBM11T4645MP-60	4Mx64	60ns	Au	2.66"x1.0"x 0.149"	3.3V

Block Diagram

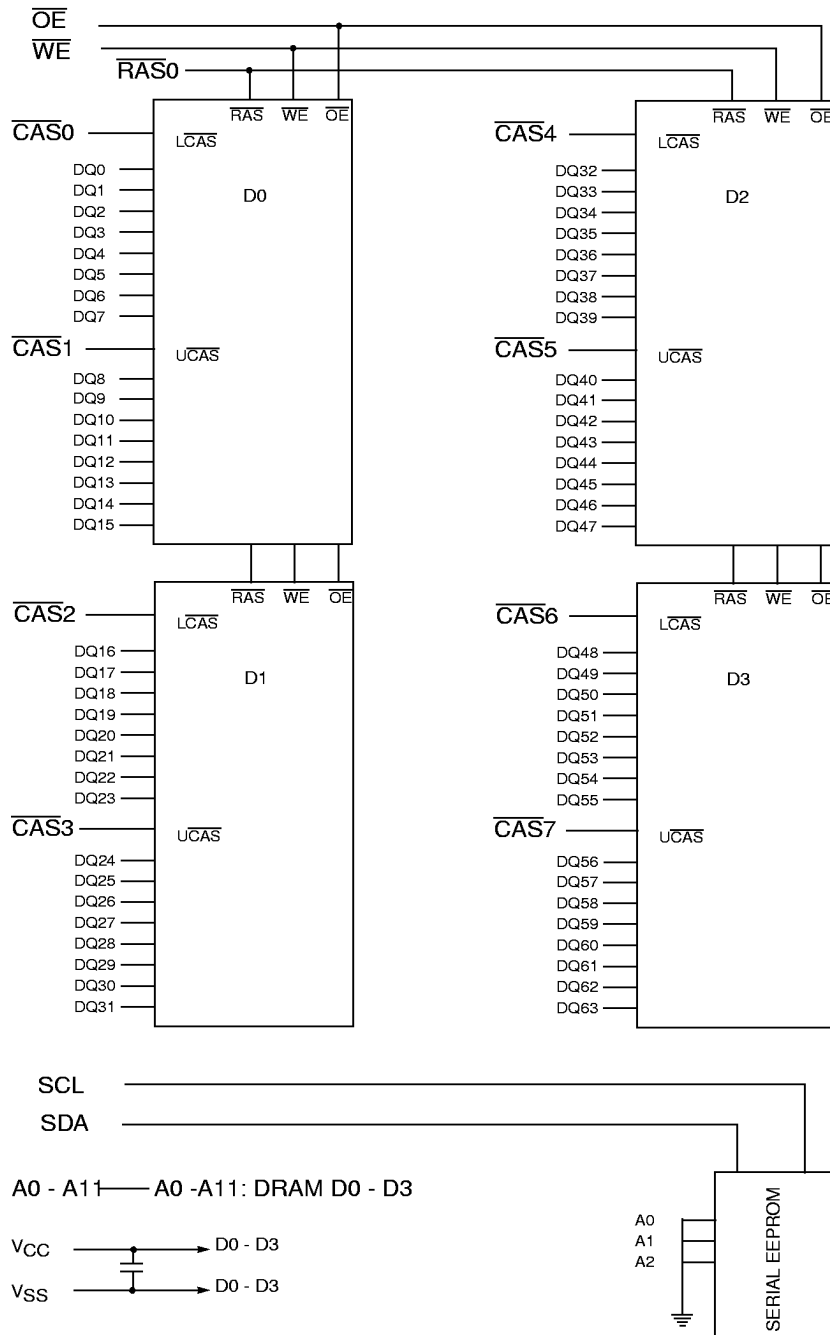

Truth Table

Function	RAS	CAS	WE	OE	Row Address	Column Address	DQx
Standby	H	X	X	X	X	X	High Impedance
Read	L	L	H	L	Row	Col	Valid Data Out
Early-Write	L	L	L	X	Row	Col	Valid Data In
Late-Write	L	L	H→L	H	Row	Col	Valid Data In
RMW	L	L	H→L	L→H	Row	Col	Valid Data In/Out
EDO Page Mode - Read 1st Cycle	L	H→L	H	L	Row	Col	Valid Data Out
Subsequent Cycles	L	H→L	H	L	N/A	Col	Valid Data Out
EDO Page Mode - Write 1st Cycle	L	H→L	L	X	Row	Col	Valid Data In
Subsequent Cycles	L	H→L	L	X	N/A	Col	Valid Data In
EDO Page Mode - RMW 1st Cycle	L	H→L	H→L	L→H	Row	Col	Valid Data In/Out
Subsequent Cycles	L	H→L	H→L	L→H	N/A	Col	Valid Data In/Out
RAS-Only Refresh	L	H	X	X	Row	N/A	High Impedance
CAS-Before-RAS Refresh	H→L	L	H	X	X	X	High Impedance
Hidden Refresh	Read	L→H→L	L	H	L	Row	Data Out
	Write	L→H→L	L	H	X	Row	Data In
Self Refresh	H→L	L	H	X	X	X	High Impedance

Serial Presence Detect

			SPD Entry Value	SPD Entry								Hex
				Binary								
Byte #	Description			Bit 7	Bit 6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0	
0	Number of SPD Bytes		128	1	0	0	0	0	0	0	0	80
1	Total # Bytes in Serial PD		256	0	0	0	0	1	0	0	0	08
2	Memory Type		EDO	0	0	0	0	0	0	1	0	02
3	# of Row Addresses		12	0	0	0	0	1	1	0	0	0C
4	# of Column Addresses		10	0	0	0	0	1	0	1	0	0A
5	# of Sodimm Banks		1	0	0	0	0	0	0	0	1	01
6	Module Data Width		64	0	1	0	0	0	0	0	0	40
7	Module Data Width (Cont.)		0	0	0	0	0	0	0	0	0	00
8	Module Interface Levels		LVTTL	0	0	0	0	0	0	0	1	01
9	Ras Access	50ns	50	0	0	1	1	0	0	1	0	32
		60ns	60	0	0	1	1	1	1	0	0	3C
10	Cas Access	13ns	13	0	0	0	0	1	1	0	1	0D
		15ns	15	0	0	0	0	1	1	1	1	0F
11	Dimm Config(Error Det/Corr.)		None	0	0	0	0	0	0	0	0	00
12	Refresh Rate/Type		SR/4x(62.5us)	1	0	0	0	0	1	0	0	84
13	Primary DRAM Type Organization		x16	0	0	0	1	0	0	0	0	10
14	Secondary DRAM Type Organization		undefined	0	0	0	0	0	0	0	0	00

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units	Notes
V_{CC}	Power Supply Voltage	-0.5 to +4.6	V	1
V_{IN}	Input Voltage	-0.5 to min ($V_{CC} + 0.5$, 4.6)	V	1
$V_{IN/OUT}(SPD)$	Input Voltage(Serial PD Device)	-0.3 to 6.5	V	1
V_{OUT}	Output Voltage	-0.5 to min ($V_{CC} + 0.5$, 4.6)	V	1
T_{OPR}	Operating Temperature	0 to +70	°C	1
T_{STG}	Storage Temperature	-55 to +150	°C	1
PD	Power Dissipation	2.4	W	1
I_{OUT}	Short Circuit Output Current	50	mA	1

1. Stresses greater than those listed may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated is not implied. Exposure to absolute maximum rating condition for extended periods may affect reliability.

Recommended DC Operating Conditions ($T_A = 0$ to 70°C)

Symbol	Parameter	Min	Typ	Max	Units	Notes
V_{CC}	Supply Voltage	3.0	3.3	3.6	V	1
V_{IH}	Input High Voltage	2.0	—	$V_{CC} + 0.3$	V	1, 2
$V_{IH}(SPD)$	Input High Voltage(Serial PD Device)	$V_{CC} \times 0.7$	—	$V_{CC} + 0.5$	V	1, 2
V_{IL}	Input Low Voltage	-0.3	—	0.8	V	1, 2
$V_{IL}(SPD)$	Input Low Voltage(Serial PD Device)	-0.3	—	$V_{CC} \times 0.3$	V	1, 2
$V_{OL}(SPD)$	Output Low Voltage(Serial PD Device) $I_{OL} = 3\text{ma}$	—	—	0.4	V	

1. All voltages referenced to V_{SS} .
2. V_{IH} may overshoot to $V_{CC} + 2.0\text{V}$ for pulse widths of $\leq 4.0\text{ns}$. Additionally, V_{IL} may undershoot to -2.0V for pulse widths $\leq 4.0\text{ns}$. Pulse widths measured at 50% points with amplitude measured peak to DC reference.

Capacitance ($T_A = 0$ to $+70^\circ\text{C}$, $V_{CC} = 3.3\text{V} \pm 0.3\text{V}$)

Symbol	Parameter	Max	Units
C_{I1}	Input Capacitance (A0-A11)	48	pF
C_{I2}	Input Capacitance (RAS, WE, OE)	56	pF
C_{I3}	Input Capacitance ($\overline{\text{CAS}}$)	15	pF
C_{I4}	Input Capacitance (SCL)	8	pF
C_{IO1}	Input/Output Capacitance (DQ0-63)	12	pF
C_{IO2}	Input/Output Capacitance (SDA)	10	pF

DC Electrical Characteristics (T_A = 0 to +70°C, V_{CC} = 3.3V ± 0.3V)

Symbol	Parameter	3.3 Volt		Units	Notes
		Min.	Max.		
I _{CC1}	Operating Current Average Power Supply Operating Current (RAS, CAS, Address Cycling: t _{RC} = t _{RC} min.)	-50	—	700	mA 1, 2, 3
		-60	—	580	
I _{CC2}	Standby Current (TTL) Power Supply Standby Current (RAS = CAS = V _{IH})	—	8.1	mA	
I _{CC3}	RAS Only Refresh Current Average Power Supply Current, RAS Only Mode (RAS Cycling, CAS = V _{IH} : t _{RC} = t _{RC} min)	-50	—	580	mA 1, 3
		-60	—	480	
I _{CC4}	EDO Page Mode Current Average Power Supply Current, EDO Page Mode (RAS = V _{IL} , CAS, Address Cycling: t _{PC} = t _{PC} min)	-50	—	600	mA 1, 2, 3
		-60	—	480	
I _{CC5}	Standby Current (CMOS) Power Supply Standby Current (RAS = CAS = V _{CC} - 0.2V)	—	900	μA	
I _{CC6}	CAS Before RAS Refresh Current Average Power Supply Current during Self Refresh CBR cycle with RAS, CAS, Cycling: t _{RC} = t _{RC} min)	-50	—	600	mA 1, 3
		-60	—	500	
I _{CC7}	Self Refresh Current Average Power Supply Current during Self Refresh CBR cycle with RAS ≥ t _{RASS} (min); CAS held low; WE = V _{CC} - 0.2V; Addresses and D _{IN} = V _{CC} - 0.2V OR 0.2.	—	1700	μA	
I _{IL}	Input Leakage Current Input Leakage Current, any input (0.0 ≤ V _{IN} ≤ (V _{CC} + 0.3V)), All Other Pins Not Under Test = 0V x=y	RAS, WE, OE, ADD	-40	+40	μA
		CAS	-10	+10	
I _{OL}	Output Leakage Current (D _{OUT} is disabled, 0.0 ≤ V _{OUT} ≤ V _{CC})	-10	+10	μA	
V _{OH}	Output Level (TTL) Output "H" Level Voltage (I _{OUT} = -5mA)	2.4	V _{CC}	V	
V _{OL}	Output Level (TTL) Output "L" Level Voltage (I _{OUT} = +4.2mA)	0.0	0.4	V	

1. I_{CC1}, I_{CC3}, I_{CC4} and I_{CC6} depend on cycle rate.
2. I_{CC1} and I_{CC4} depend on output loading. Specified values are obtained with the output open.
3. Address can be changed once or less while RAS = V_{IL}. In the case of I_{CC4}, it can be changed once or less when CAS = V_{IH}.

AC Characteristics (T_A = 0 to +70°C, V_{CC} = 3.3V ± 0.3V)

1. V_{IH} (min) and V_{IL} (max) are reference levels for measuring timing of input signals. Transition times are measured between V_{IH} and V_{IL}.
2. An initial pause of 100μs is required after power-up followed by 8 $\overline{\text{RAS}}$ only refresh cycles before proper device operation is achieved. In case of using internal refresh counter, a minimum of 8 $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh cycles instead of 8 $\overline{\text{RAS}}$ only refresh cycles is required..
3. AC measurements assume t_T = 2ns.
4. Valid column addresses are A0 through A8.

Read, Write, Read-Modify-Write and Refresh Cycles (Common Parameters)

Symbol	Parameter	-50		-60		Unit	Notes
		Min	Max	Min	Max		
t _{RC}	Random Read or Write Cycle Time	84	—	104	—	ns	
t _{RP}	$\overline{\text{RAS}}$ Precharge Time	30	—	40	—	ns	
t _{CP}	$\overline{\text{CAS}}$ Precharge Time	8	—	10	—	ns	
t _{RAS}	$\overline{\text{RAS}}$ Pulse Width	50	100K	60	100K	ns	
t _{CAS}	$\overline{\text{CAS}}$ Pulse Width	8	100K	10	100K	ns	
t _{ASR}	Row Address Setup Time	0	—	0	—	ns	
t _{RAH}	Row Address Hold Time	8	—	10	—	ns	
t _{ASC}	Column Address Setup Time	0	—	0	—	ns	
t _{CAH}	Column Address Hold Time	8	—	10	—	ns	
t _{RCD}	$\overline{\text{RAS}}$ to $\overline{\text{CAS}}$ Delay Time	12	37	14	45	ns	1
t _{RAD}	$\overline{\text{RAS}}$ to Column Address Delay Time	10	25	12	30	ns	2
t _{RSH}	$\overline{\text{RAS}}$ Hold Time	8	—	10	—	ns	
t _{CSH}	$\overline{\text{CAS}}$ Hold Time	45	—	50	—	ns	
t _{CRP}	$\overline{\text{CAS}}$ to $\overline{\text{RAS}}$ Precharge Time	5	—	5	—	ns	
t _{OED}	$\overline{\text{OE}}$ to D _{IN} Delay Time	13	—	15	—	ns	3
t _{DZO}	$\overline{\text{OE}}$ Delay Time from D _{IN}	0	—	0	—	ns	4
t _{DZC}	$\overline{\text{CAS}}$ Delay Time from D _{IN}	0	—	0	—	ns	4
t _T	Transition Time (Rise and Fall)	1	50	1	50	ns	

1. Operation within the t_{RCD}(max) limit ensures that t_{RAC}(max) can be met. The t_{RCD}(max) is specified as a reference point only: If t_{RCD} is greater than the specified t_{RCD}(max) limit, then access time is controlled by t_{CAC}.
2. Operation within the t_{RAD}(max) limit ensures that t_{RAC}(max) can be met. The t_{RAD}(max) is specified as a reference point only: If t_{RAD} is greater than the specified t_{RAD}(max) limit, then access time is controlled by t_{AA}.
3. Either t_{CDD} or t_{OED} must be satisfied.
4. Either t_{DZC} or t_{DZO} must be satisfied.

Write Cycle

Symbol	Parameter	-50		-60		Unit	Notes
		Min	Max	Min	Max		
t_{WCS}	Write Command Set Up Time	0	—	0	—	ns	1
t_{WCH}	Write Command Hold Time	8	—	10	—	ns	
t_{WP}	Write Command Pulse Width	7	—	10	—	ns	
t_{RWL}	Write Command to $\overline{RAS}$ Lead Time	8	—	10	—	ns	
t_{CWL}	Write Command to $\overline{CAS}$ Lead Time	8	—	10	—	ns	
t_{DS}	D_{IN} Setup Time	0	—	0	—	ns	2
t_{DH}	D_{IN} Hold Time	7	—	10	—	ns	2

1. t_{WCS} , t_{RWD} , t_{CWD} , t_{AWD} , and t_{CPW} are not restrictive parameters. They are included in the data sheet as electrical characteristics only. If $t_{WCS} \geq t_{WCS}(\text{min.})$, the entire cycle is an early write cycle and the data pin will remain open circuit (high impedance) through the entire cycle; If $t_{RWD} \geq t_{RWD}(\text{min.})$, $t_{CWD} \geq t_{CWD}(\text{min.})$, $t_{AWD} \geq t_{AWD}(\text{min.})$ and $t_{CPW} \geq t_{CPW}(\text{min.})$ (Fast Page Mode), the cycle is a Read-Modify-Write cycle and the data will contain read from the selected cell; If neither of the above sets of conditions are met, the condition of the data (at access time) is indeterminate.
2. These parameters are referenced to $\overline{LCAS}$ or $\overline{UCAS}$ leading edge in early write cycles and to $\overline{WE}$ leading edge in Read-Modify-Write cycles.

Read Cycle

Symbol	Parameter	-50		-60		Unit	Notes
		Min	Max	Min	Max		
t_{RAC}	Access Time from $\overline{RAS}$	—	50	—	60	ns	1, 2, 4
t_{CAC}	Access Time from $\overline{CAS}$	—	13	—	15	ns	1, 4
t_{AA}	Access Time from Address	—	25	—	30	ns	1, 4
t_{OEA}	Access Time from $\overline{OE}$	—	13	—	15	ns	4
t_{RCS}	Read Command Setup Time	0	—	0	—	ns	
t_{RCH}	Read Command Hold Time to $\overline{CAS}$	0	—	0	—	ns	5
t_{RRH}	Read Command Hold Time to $\overline{RAS}$	0	—	0	—	ns	5
t_{RAL}	Column Address to $\overline{RAS}$ Lead Time	25	—	30	—	ns	
t_{CLZ}	$\overline{CAS}$ to Output in Low-Z	0	—	0	—	ns	
t_{OES}	$\overline{OE}$ setup time prior to $\overline{CAS}$	5	—	5	—	ns	
t_{ORD}	$\overline{OE}$ setup time prior to $\overline{RAS}$ (Hidden Refresh)	0	—	0	—	ns	
t_{CDD}	$\overline{CAS}$ to D_{IN} Delay Time	13	—	15	—	ns	3
t_{OEZ}	Output Buffer Turn-off Delay from $\overline{OE}$	0	13	0	15	ns	6
t_{OFF}	Output Buffer Turn-off Delay	0	13	0	15	ns	6

1. Operation within the $t_{RCD}(\text{max.})$ limit ensures that $t_{RAC}(\text{max.})$ can be met. $t_{RCD}(\text{max.})$ is specified as a reference point only. If t_{RCD} is greater than the specified $t_{RCD}(\text{max.})$ limit, then access time is controlled by t_{CAC} .
2. Operation within the $t_{RAD}(\text{max.})$ limit ensures that $t_{RAC}(\text{max.})$ can be met. $t_{RAD}(\text{max.})$ is specified as a reference point only. If t_{RAD} is greater than the specified $t_{RAD}(\text{max.})$ limit, then access time is controlled by t_{AA} .
3. Either t_{CDD} or t_{OED} must be satisfied.
4. Measured with the specified current load and 100pF.
5. Either t_{RCH} or t_{RRH} must be satisfied.
6. $t_{OFF}(\text{max})$ and $t_{OEZ}(\text{max})$ define the time at which the output achieves the open circuit condition and is not referenced to output voltage levels.

Read-Modify-Write Cycle

Symbol	Parameter	-50		-60		Unit	Notes
		Min	Max	Min	Max		
t_{RWC}	Read-Modify-Write Cycle Time	111	—	135	—	ns	
t_{RWD}	$\overline{RAS}$ to $\overline{WE}$ Delay Time	67	—	79	—	ns	1
t_{CWD}	$\overline{CAS}$ to $\overline{WE}$ Delay Time	30	—	34	—	ns	1
t_{AWD}	Column Address to $\overline{WE}$ Delay Time	42	—	49	—	ns	1
t_{OEH}	$\overline{OE}$ Command Hold Time	7	—	10	—	ns	

1. t_{WCS} , t_{RWD} , t_{CWD} , t_{AWD} , and t_{CPW} are not restrictive parameters. They are included in the data sheet as electrical characteristics only. If $t_{WCS} \geq t_{WCS}(\text{min.})$, the entire cycle is an early write cycle and the data pin will remain open circuit (high impedance) through the entire cycle; If $t_{RWD} \geq t_{RWD}(\text{min.})$, $t_{CWD} \geq t_{CWD}(\text{min.})$, $t_{AWD} \geq t_{AWD}(\text{min.})$ and $t_{CPW} \geq t_{CPW}(\text{min.})$ (Fast Page Mode), the cycle is a Read-Modify-Write cycle and the data will contain read from the selected cell; If neither of the above sets of conditions are met, the condition of the data (at access time) is indeterminate.

EDO Mode Cycle

Symbol	Parameter	-50		-60		Units	Notes
		Min.	Max.	Min.	Max.		
t_{HCAS}	$\overline{CAS}$ Pulse Width (EDO Page Mode)	8	10K	10	10K	ns	
t_{HPC}	EDO Page Mode Cycle Time (Read/Write)	20	—	25	—	ns	
t_{HPRWC}	EDO Page Mode Read Modify Write Cycle Time	51	—	66	—	ns	
t_{DOH}	Data-out Hold Time from $\overline{CAS}$	5	—	5	—	ns	
t_{WHZ}	Output buffer Turn-Off Delay from $\overline{WE}$	0	10	0	10	ns	
t_{WPZ}	$\overline{WE}$ Pulse Width to Output Disable at $\overline{CAS}$ High	7	—	10	—	ns	
t_{CPRH}	$\overline{RAS}$ Hold Time from $\overline{CAS}$ Precharge	27	—	35	—	ns	
t_{CPA}	Access Time from $\overline{CAS}$ Precharge	—	27	—	35	ns	1
t_{RASP}	EDO Page Mode $\overline{RAS}$ Pulse Width	50	200K	60	200K	ns	
t_{OEP}	$\overline{OE}$ High Pulse Width	7	—	10	—	ns	
t_{OEHC}	$\overline{OE}$ High Hold Time from $\overline{CAS}$ High	7	—	10	—	ns	

1. Measured with the specified current load and 100pF at $V_{OL} = 0.8V$ and $V_{OH} = 2.0V$.

Refresh Cycle

Symbol	Parameter	-50		-60		Unit	Notes
		Min	Max	Min	Max		
t_{CHR}	CAS Hold Time (CAS before RAS Refresh Cycle)	8	—	10	—	ns	
t_{CSR}	CAS Setup Time (CAS before RAS Refresh Cycle)	5	—	5	—	ns	
t_{WRP}	WE Setup Time (CAS before RAS Refresh Cycle)	8	—	10	—	ns	
t_{WRH}	WE Hold Time (CAS before RAS Refresh Cycle)	8	—	10	—	ns	
t_{RPC}	RAS Precharge to CAS Hold Time	5	—	5	—	ns	
t_{REF}	Refresh Period	—	256	—	256	ms	1
1. 4096 refreshes are required every 256ms.							

Self Refresh Cycle


Symbol	Parameter	-50		-60		Unit	Notes
		Min	Max	Min	Max		
t_{RASS}	RAS Pulse Width During Self Refresh Cycle	100	—	100	—	μ s	1
t_{RPS}	RAS Precharge Time During Self Refresh Cycle)	84	—	104	—	ns	1
t_{CHS}	CAS Hold Time During Self Refresh Cycle)	50	—	50	—	ns	1
1. When using Self Refresh mode, the following refresh operations must be performed to ensure proper DRAM operation: If row addresses are being refreshed in an EVENLY DISTRIBUTED manner over the refresh interval using CBR refresh cycles, then only one CBR cycle must be performed immediately after exit from Self Refresh. If row addresses are being refreshed in any other manner (ROR - Distributed/Burst; or CBR-Burst) over the refresh interval, then a full set of row refreshes must be performed immediately before entry to and immediately after exit from Self Refresh.							

Presence Detect Read and Write Cycle


Symbol	Parameter	Min	Max	Unit	Notes
f_{SCL}	SCL Clock Frequency		100	KHZ	
T_I	Noise Suppression Time Constant at SCL, SDA Inputs		100	ns	
t_{AA}	SCL Low to SDA Data Out Valid	0.3	3.5	μ s	
t_{BUF}	Time the Bus Must Be Free before a New Transmission Can Start	4.7		μ s	
$t_{HD:STA}$	Start Condition Hold Time	4.0		μ s	
t_{LOW}	Clock Low Period	4.7		μ s	
t_{HIGH}	Clock High Period	4.0		μ s	
$t_{SU:STA}$	Start Condition Setup Time(for a Repeated Start Condition)	4.7		μ s	
$t_{HD:DAT}$	Data in Hold Time	0		μ s	
$t_{SU:DAT}$	Data in Setup Time	250		ns	
t_r	SDA and SCL Rise Time		1	μ s	
t_f	SDA and SCL Fall Time		300	ns	
$t_{SU:STO}$	Stop Condition Setup Time	4.7		μ s	
t_{DH}	Data Out Hold Time	300		ns	
t_{WR}	Write Cycle Time		10	ms	1

1. The write cycle time(t_{WR}) is the time from a valid stop condition of a write sequence to the end of the internal erase/program cycle. During the write cycle, the bus interface circuits are disabled, SDA is allowed to remain high per the bus-level pull-up resistor, and the device does not respond to its slave address.

Read Cycle

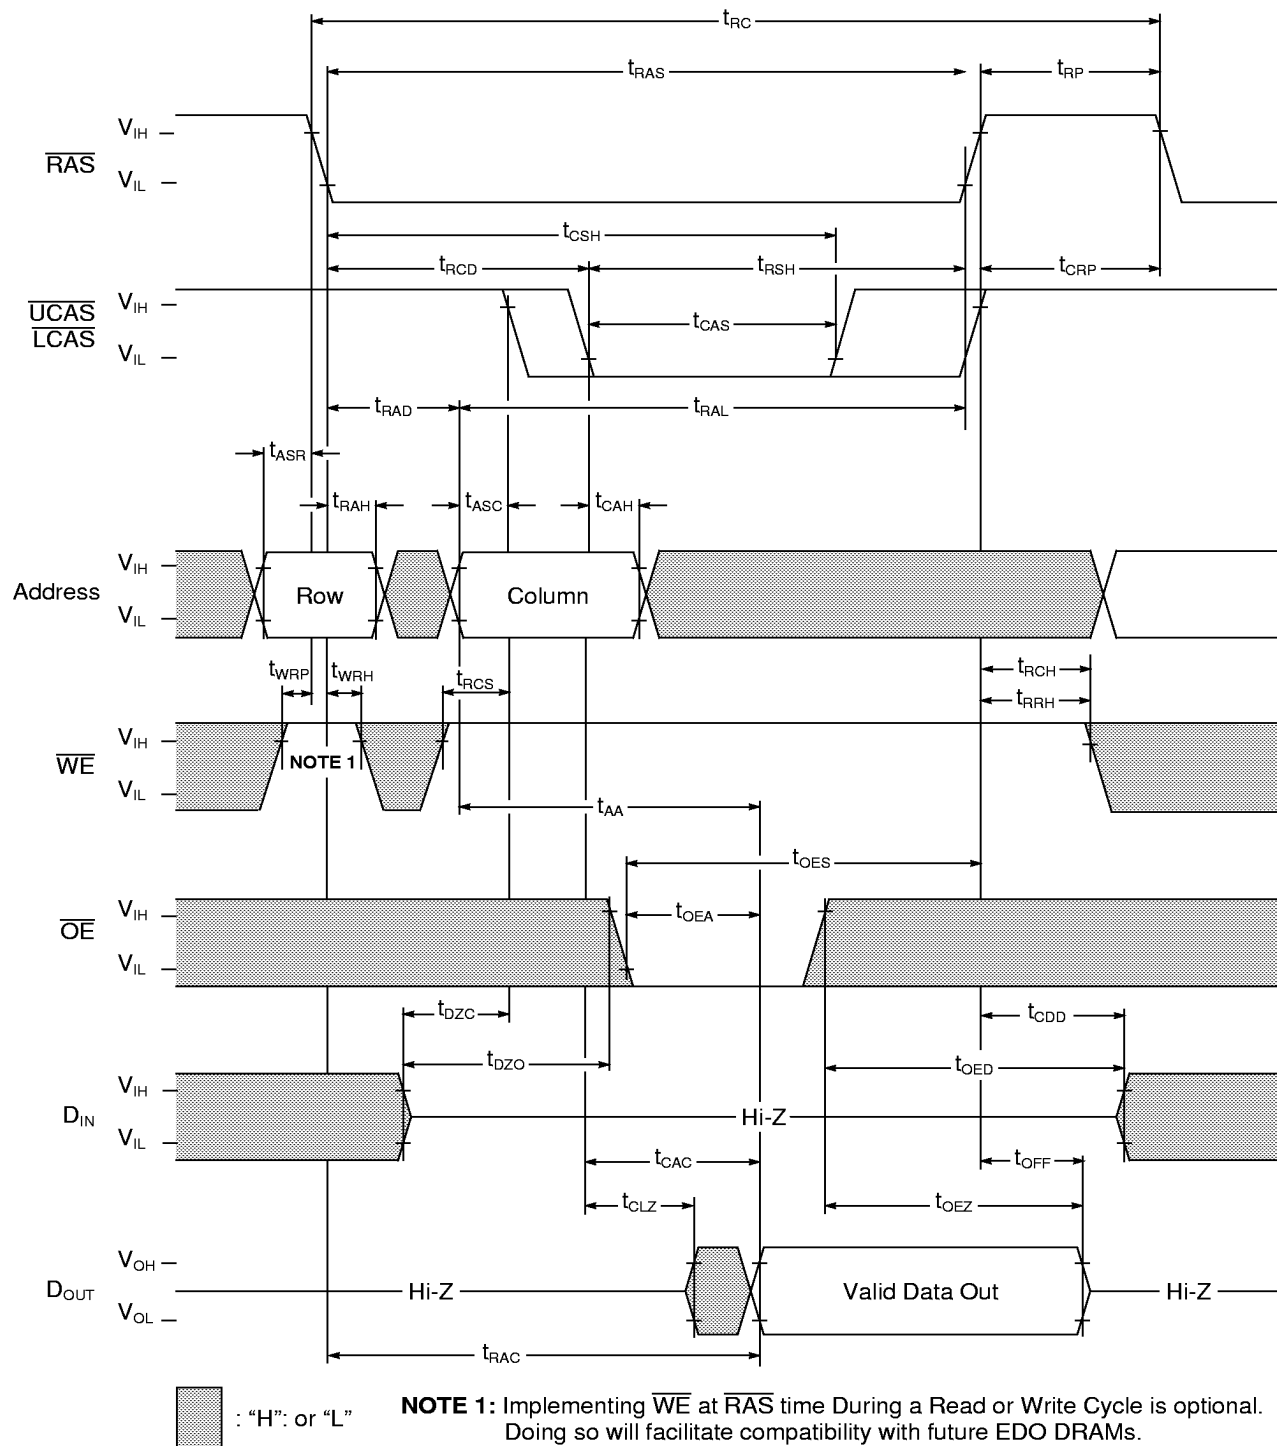


Write Cycle (Early Write)

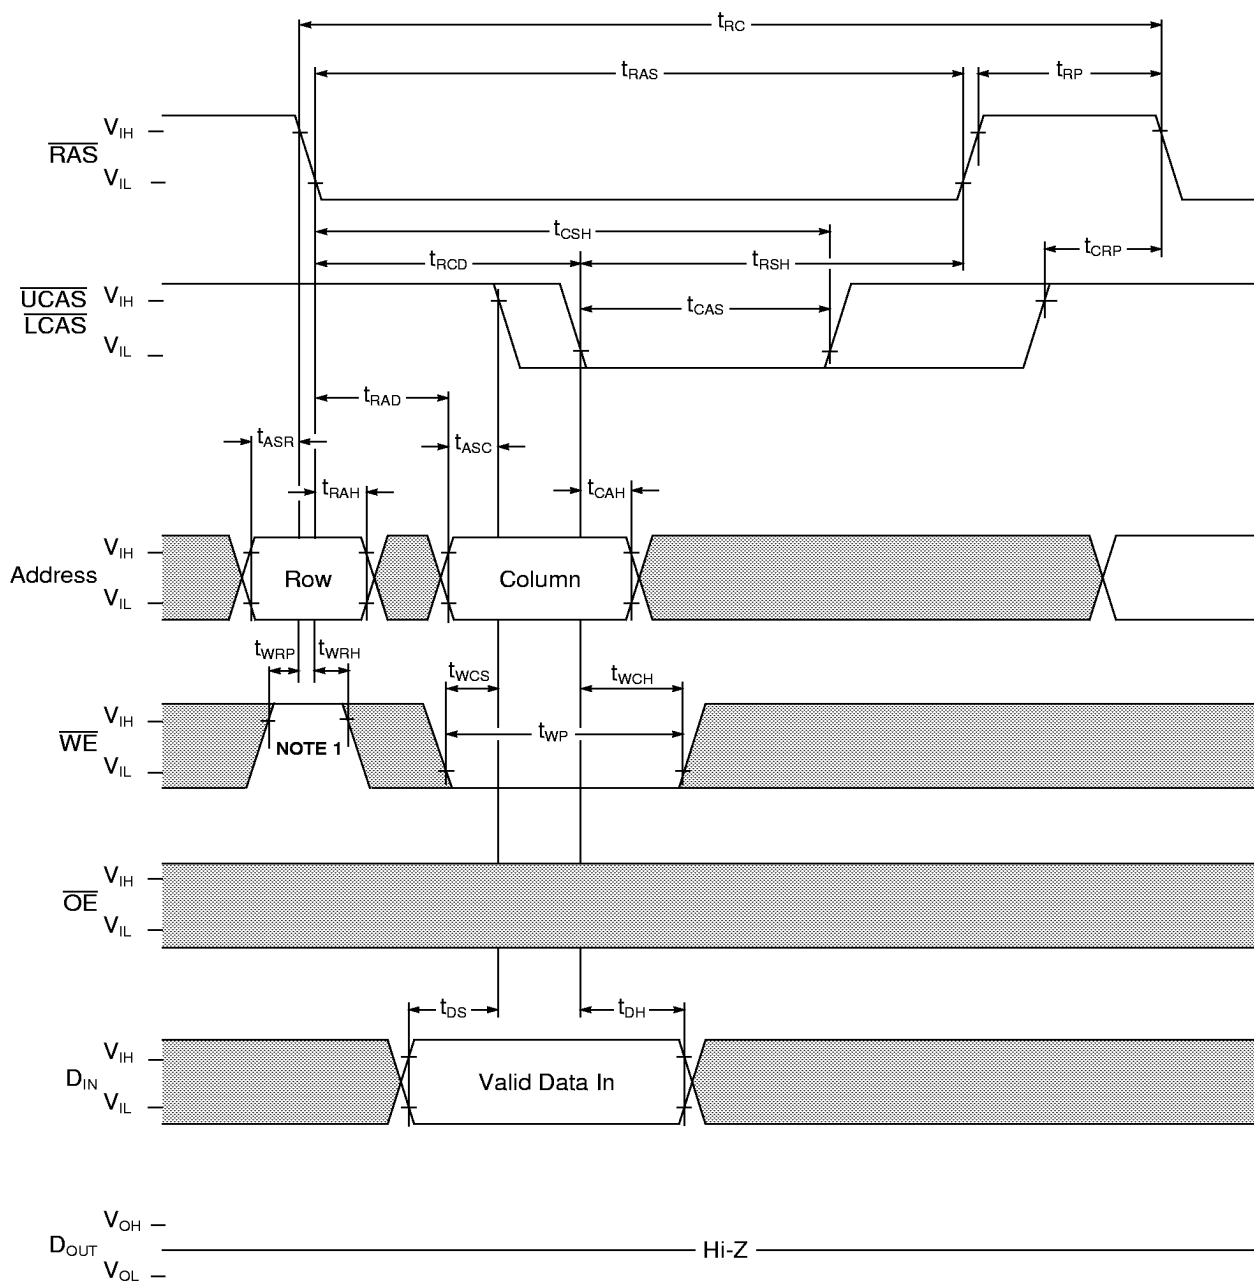

□ : "H" or "L"


NOTE 1: Implementing $\overline{WE}$ at $\overline{RAS}$ time During a Read or Write Cycle is optional. Doing so will facilitate compatibility with future EDO DRAMs.

Write Cycle (Late Write)

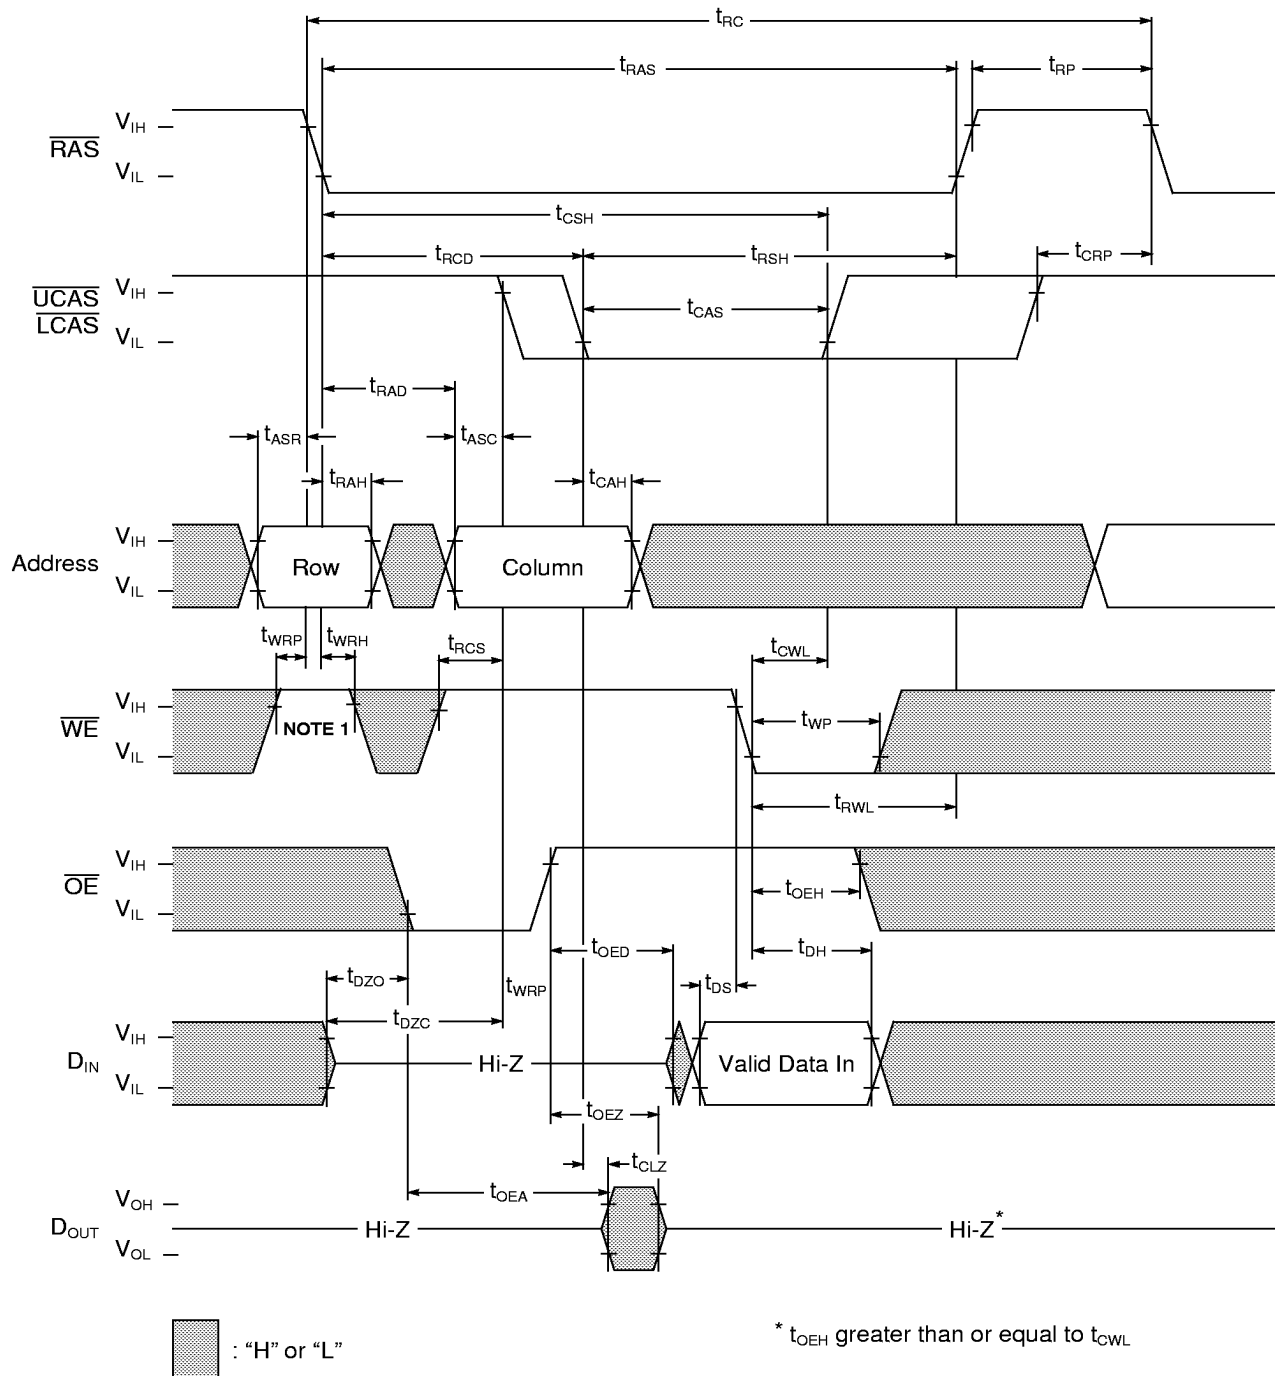

NOTE 1: Implementing $\overline{\text{WE}}$ at $\overline{\text{RAS}}$ time During a Read or Write Cycle is optional. Doing so will facilitate compatibility with future EDO DRAMs.

Read-Modify-Write-Cycle

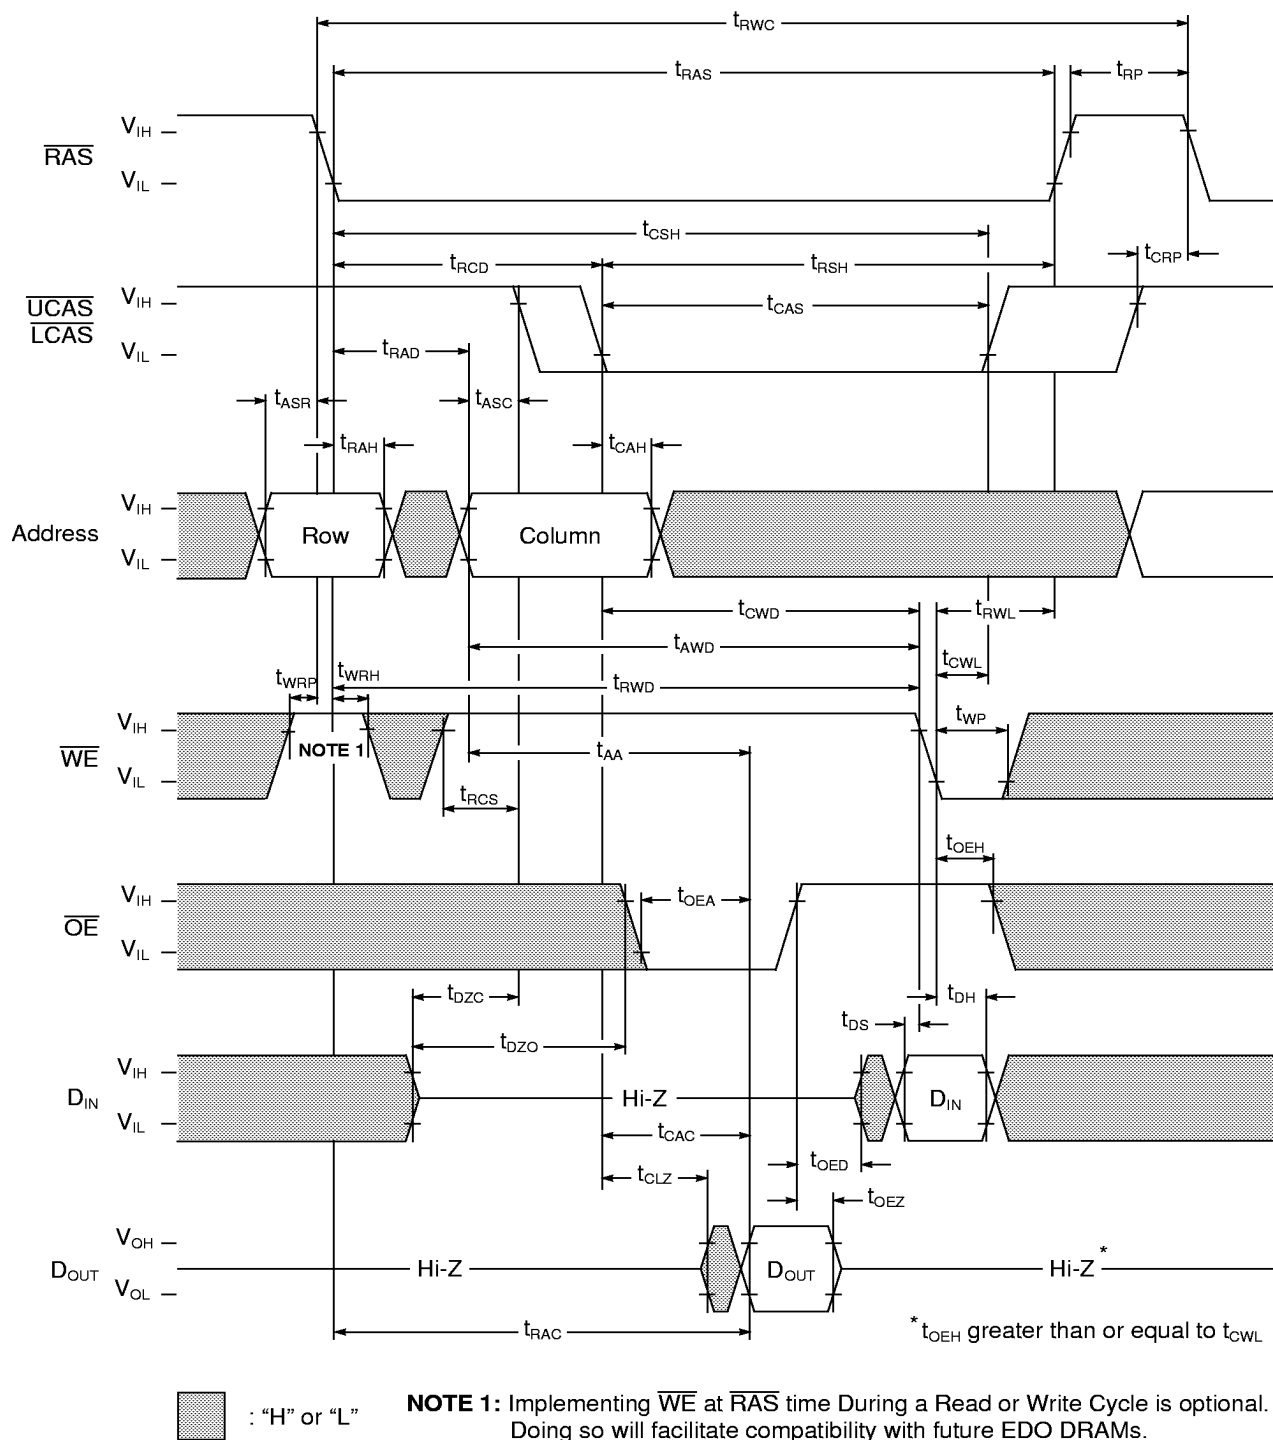


The diagram illustrates the timing relationships for a DRAM read cycle. The signals shown are:

- RAS**: Row Address Strobe, active low. Timing parameters include t_{RASP} (pulse width), t_{CRP} (setup before RAS precharge), t_{CPRH} (hold after RAS precharge), and t_{RPH} (hold after RAS precharge).
- UCAS/LCAS**: Column Address Strobe/Latch Strobe, active low. Timing parameters include t_{RCD} (row-to-column delay), t_{HPC} (hold after RAS), t_{CP} (column pulse width), t_{HCAS} (hold after column address), t_{RSH} (row-to-column setup), t_{RAL} (row-to-column delay), and t_{CAH} (column address hold).
- Address**: Row and Column addresses. Timing parameters include t_{ASR} (address setup), t_{RAH} (row address hold), t_{ASC} (address-to-column delay), t_{CAH} (column address hold), t_{RAD} (row address delay), t_{WRP} (write recovery), t_{WRH} (write recovery hold), and t_{RCS} (row-to-column setup).
- WE**: Write Enable, active low. Timing parameters include t_{CAC} (column address-to-column output delay), t_{CPA} (column pulse-to-column output delay), t_{AA} (access-to-column output delay), t_{WP} (write pulse width), and t_{OFF} (write pulse offset).
- OE**: Output Enable, active low. Timing parameters include t_{OES} (output enable setup), t_{OEA} (output enable delay), t_{RAC} (row address-to-column output delay), t_{AA} (access-to-column output delay), t_{DOH} (data output hold), t_{CLZ} (column latch-to-column output delay), and t_{OEZ} (output enable delay).
- D_OUT**: Data Output. Timing parameters include t_{DOH} (data output hold) and t_{CLZ} (column latch-to-column output delay).


NOTE 1: Implementing $\overline{WE}$ at $\overline{RAS}$ time During a Read or Write Cycle is optional. Doing so will facilitate compatibility with future EDO DRAMs.

EDO Page Mode Read Cycle ($\overline{\text{OE}}$ Control)

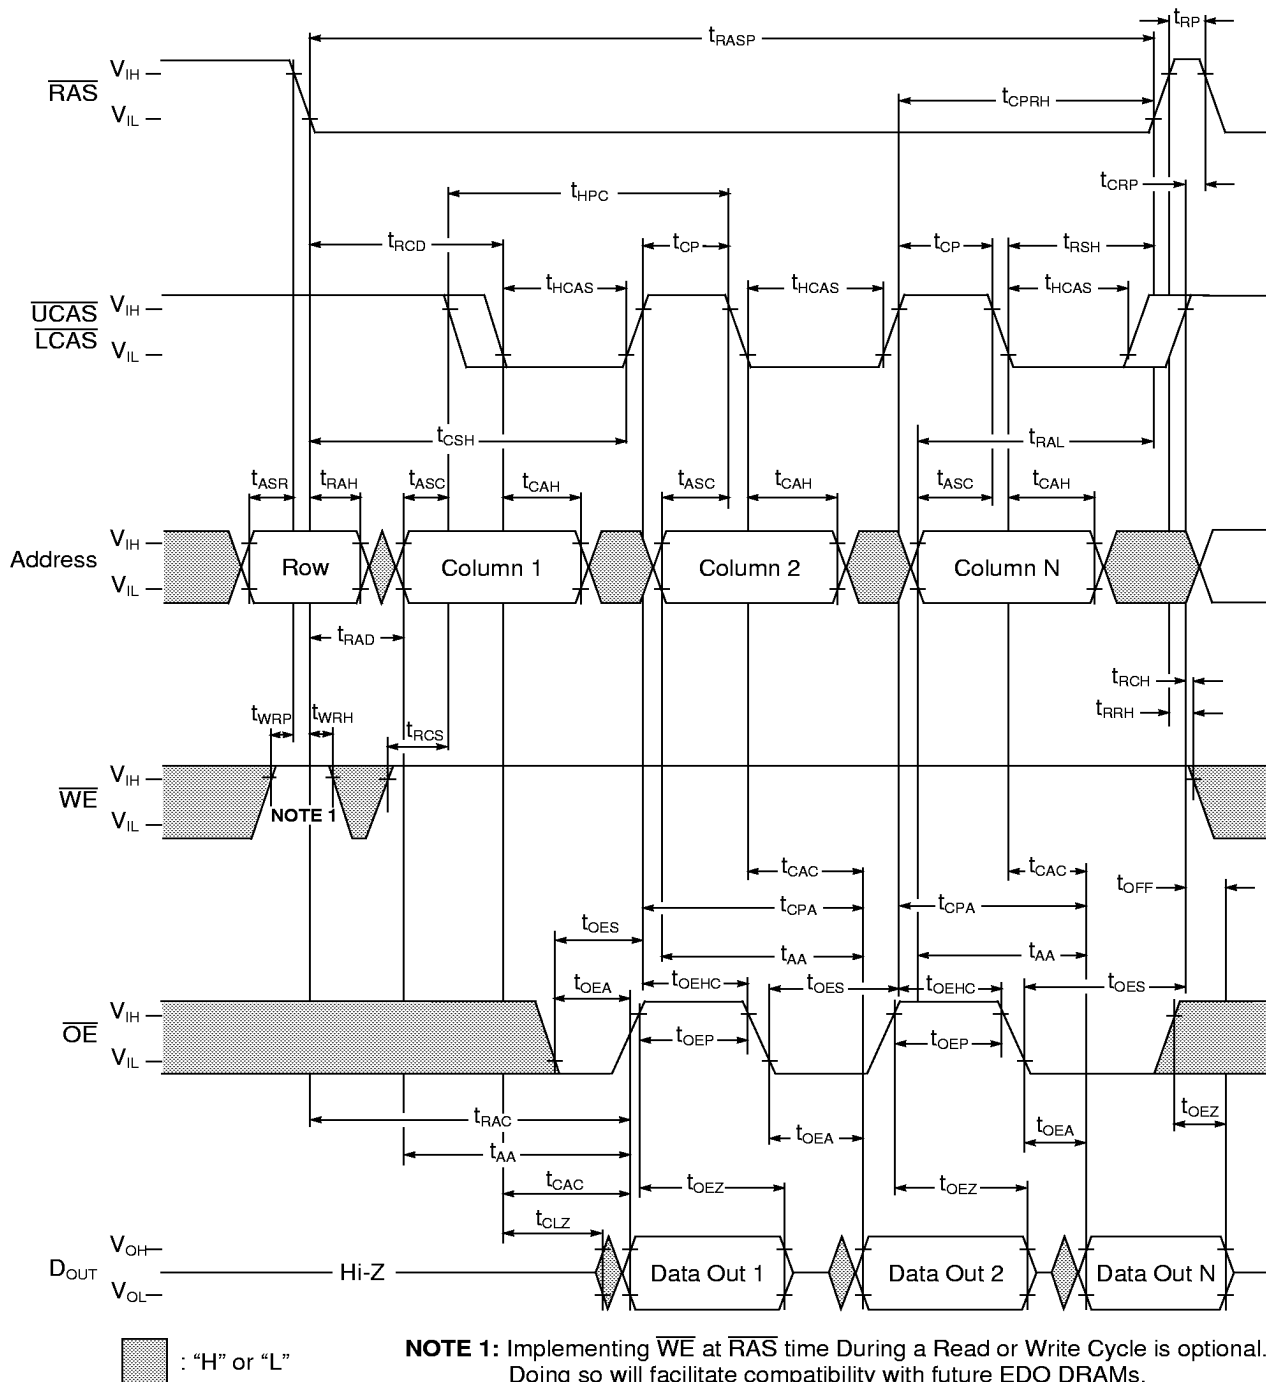


[illegible]


EDO Page Mode Late Write Cycle

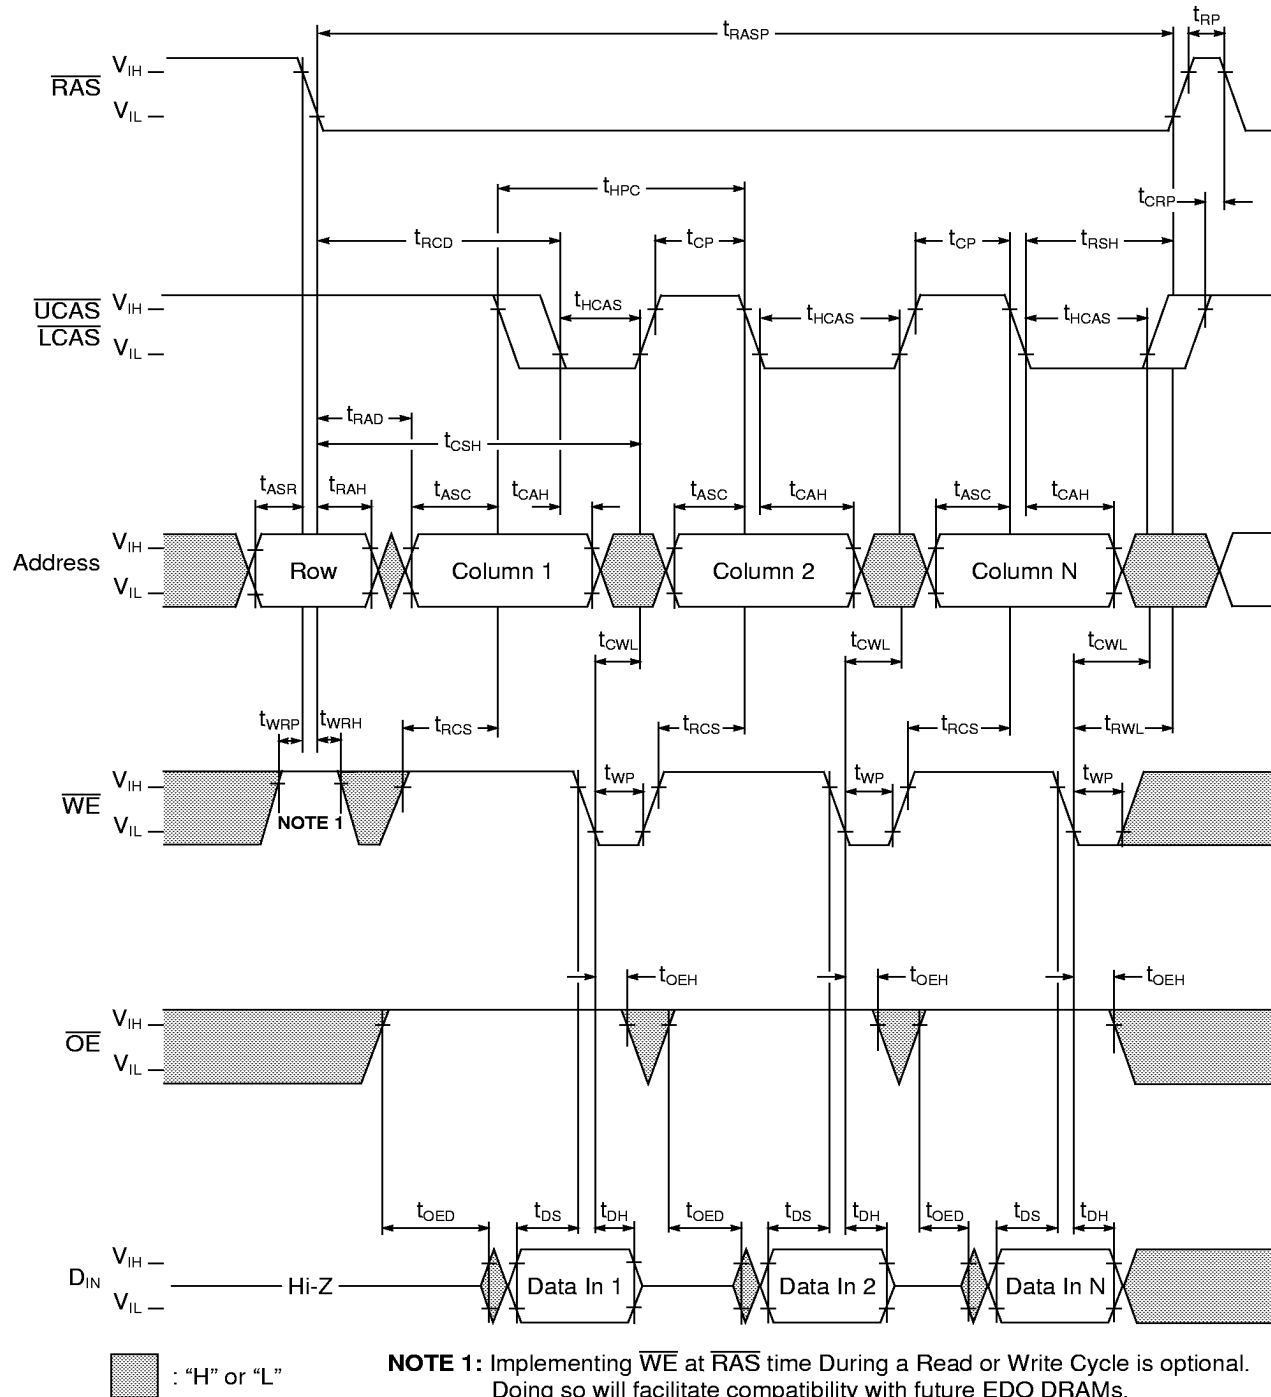

EDO Page Mode Read Modify Write Cycle

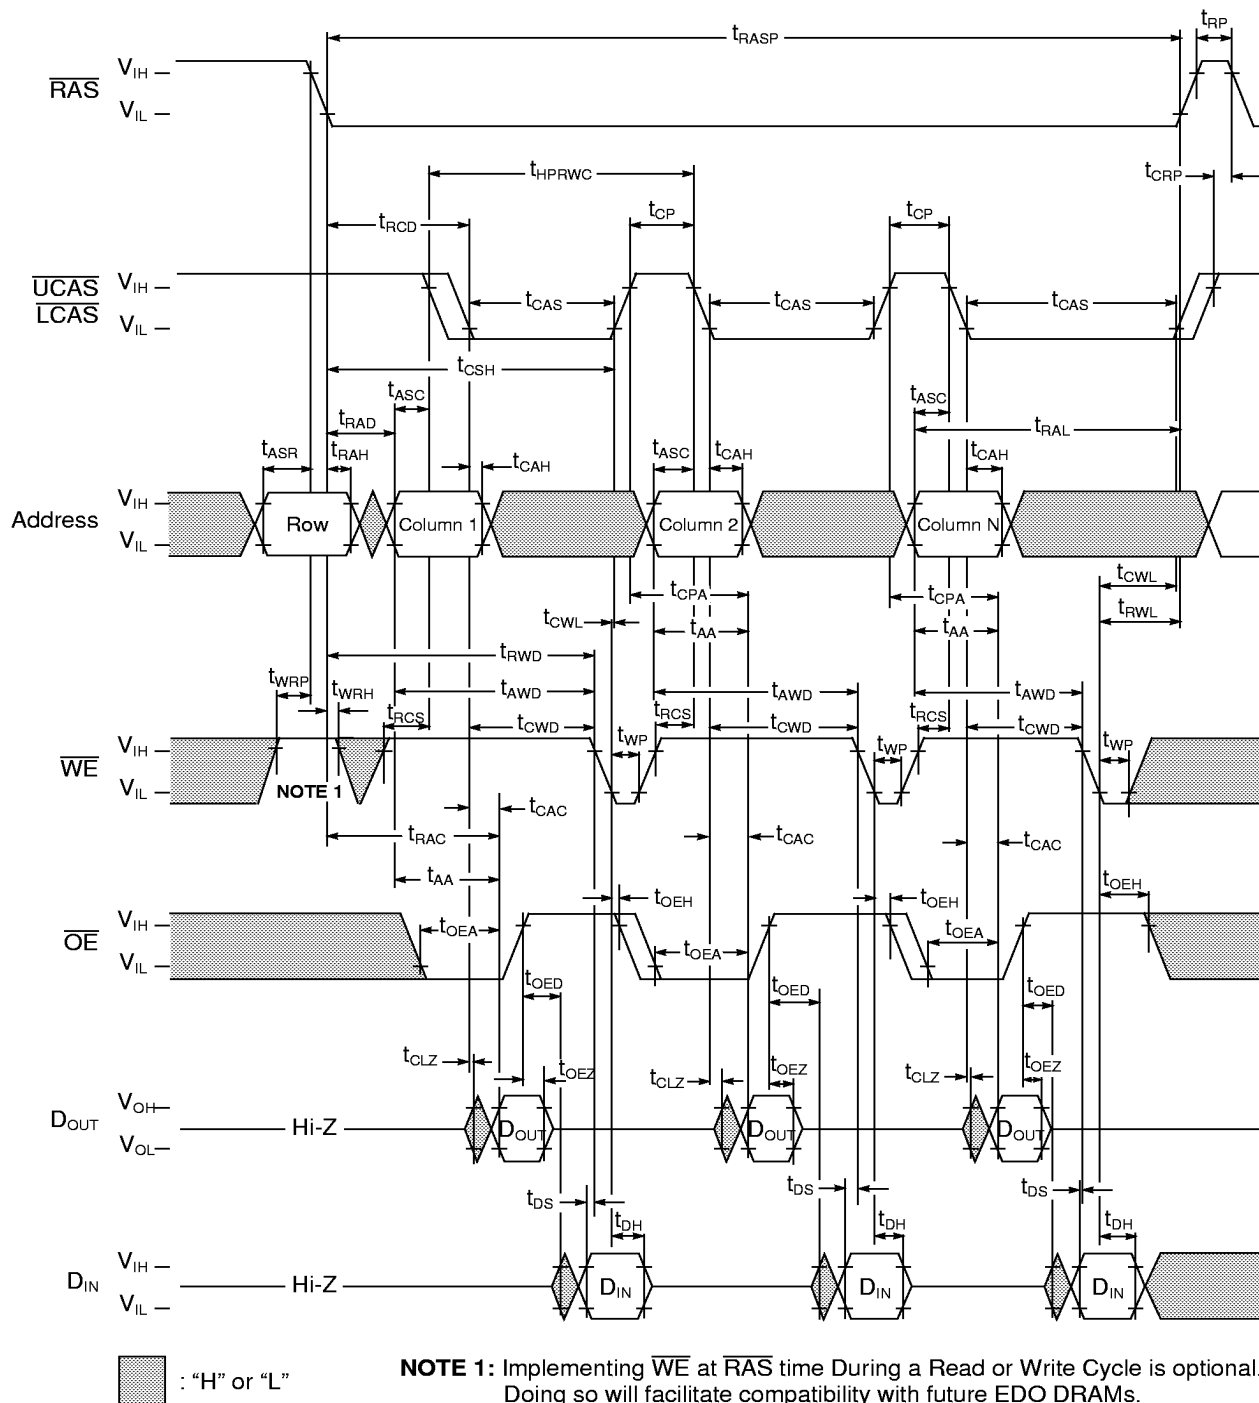


RAS Only Refresh Cycle

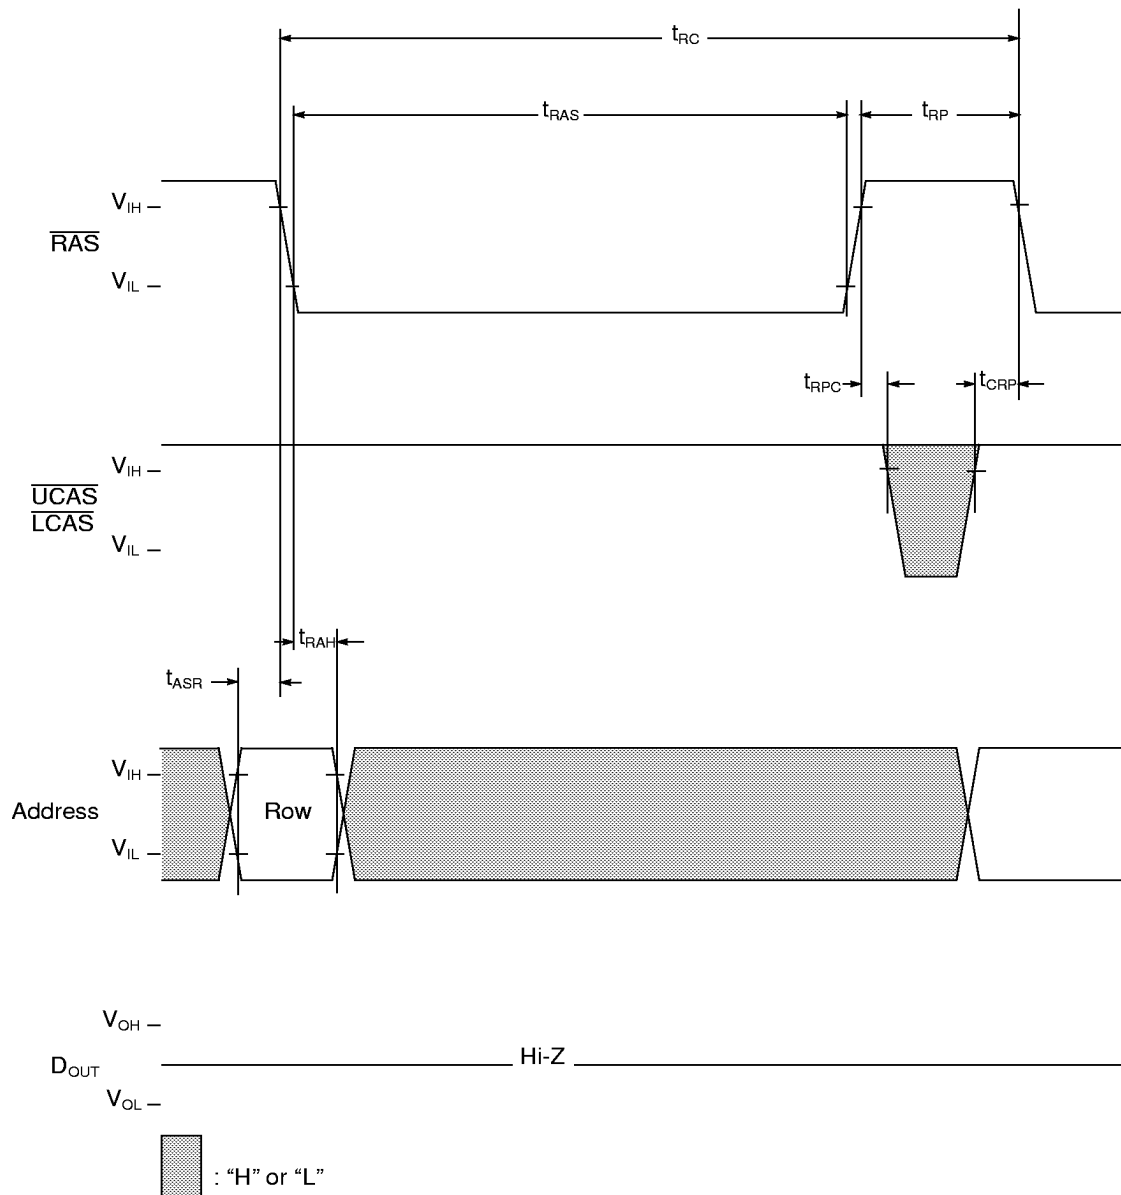


Note: $\overline{\text{WE}}$, $\overline{\text{OE}}$, D_{IN} are "H" or "L"

CAS Before RAS Refresh Cycle

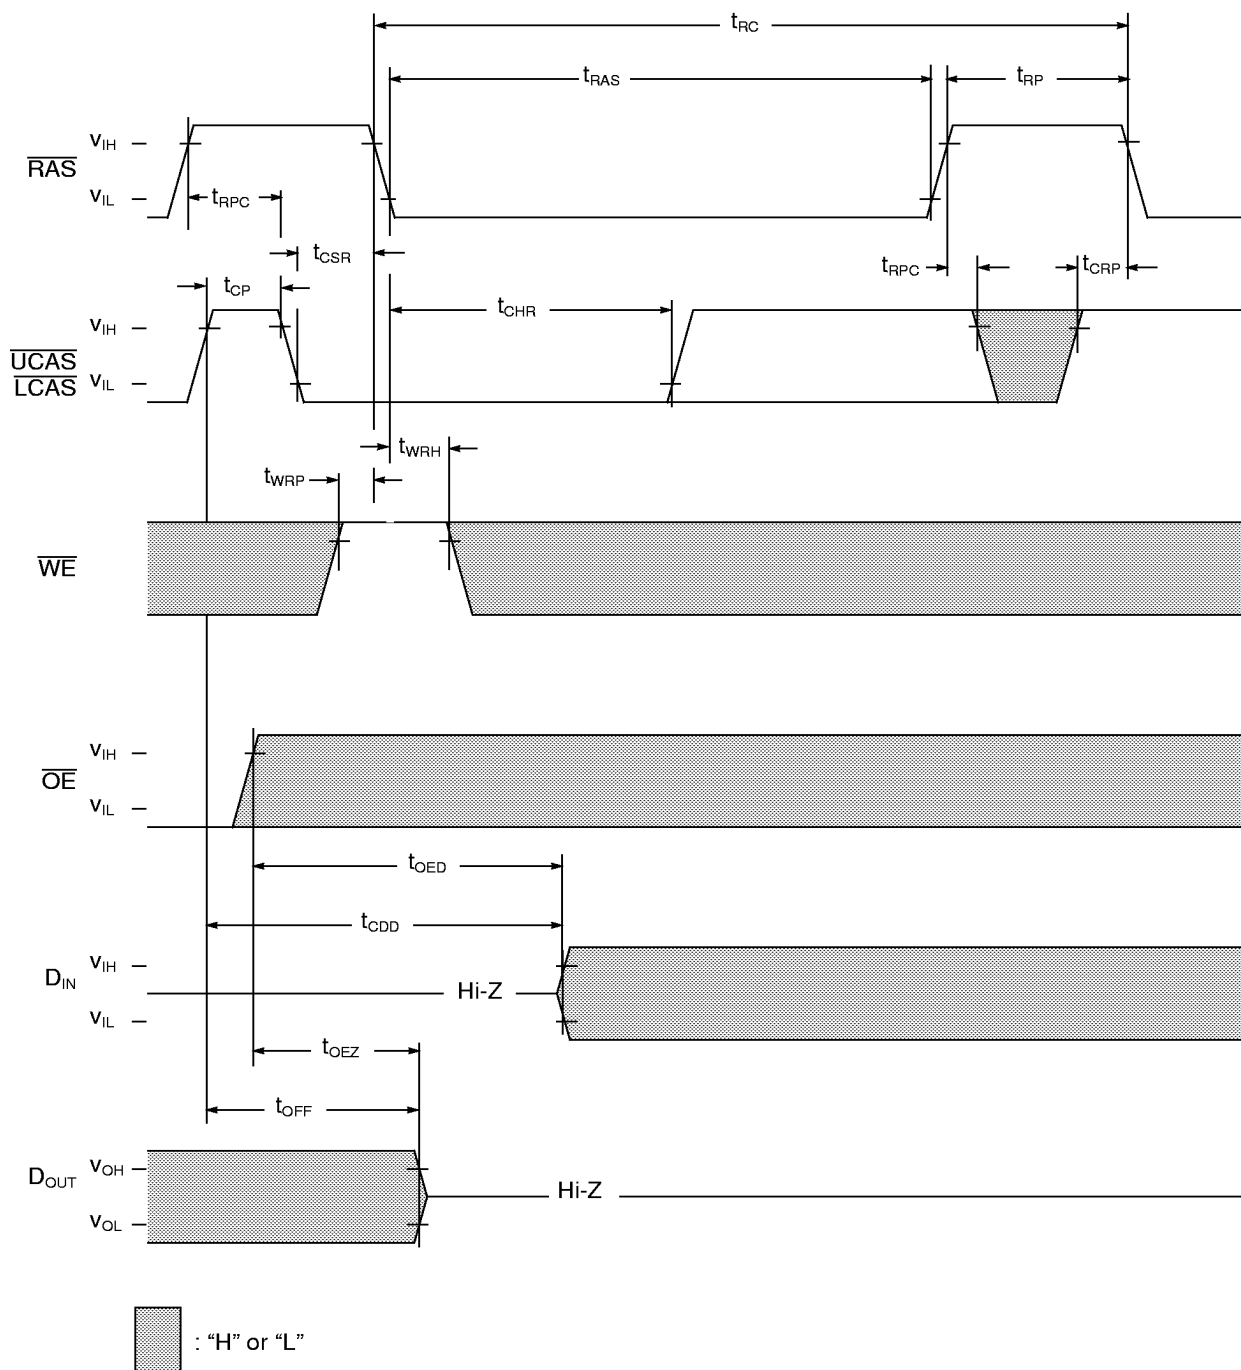


Note: Addresses are "H" or "L"


Hidden Refresh Cycle (Read)

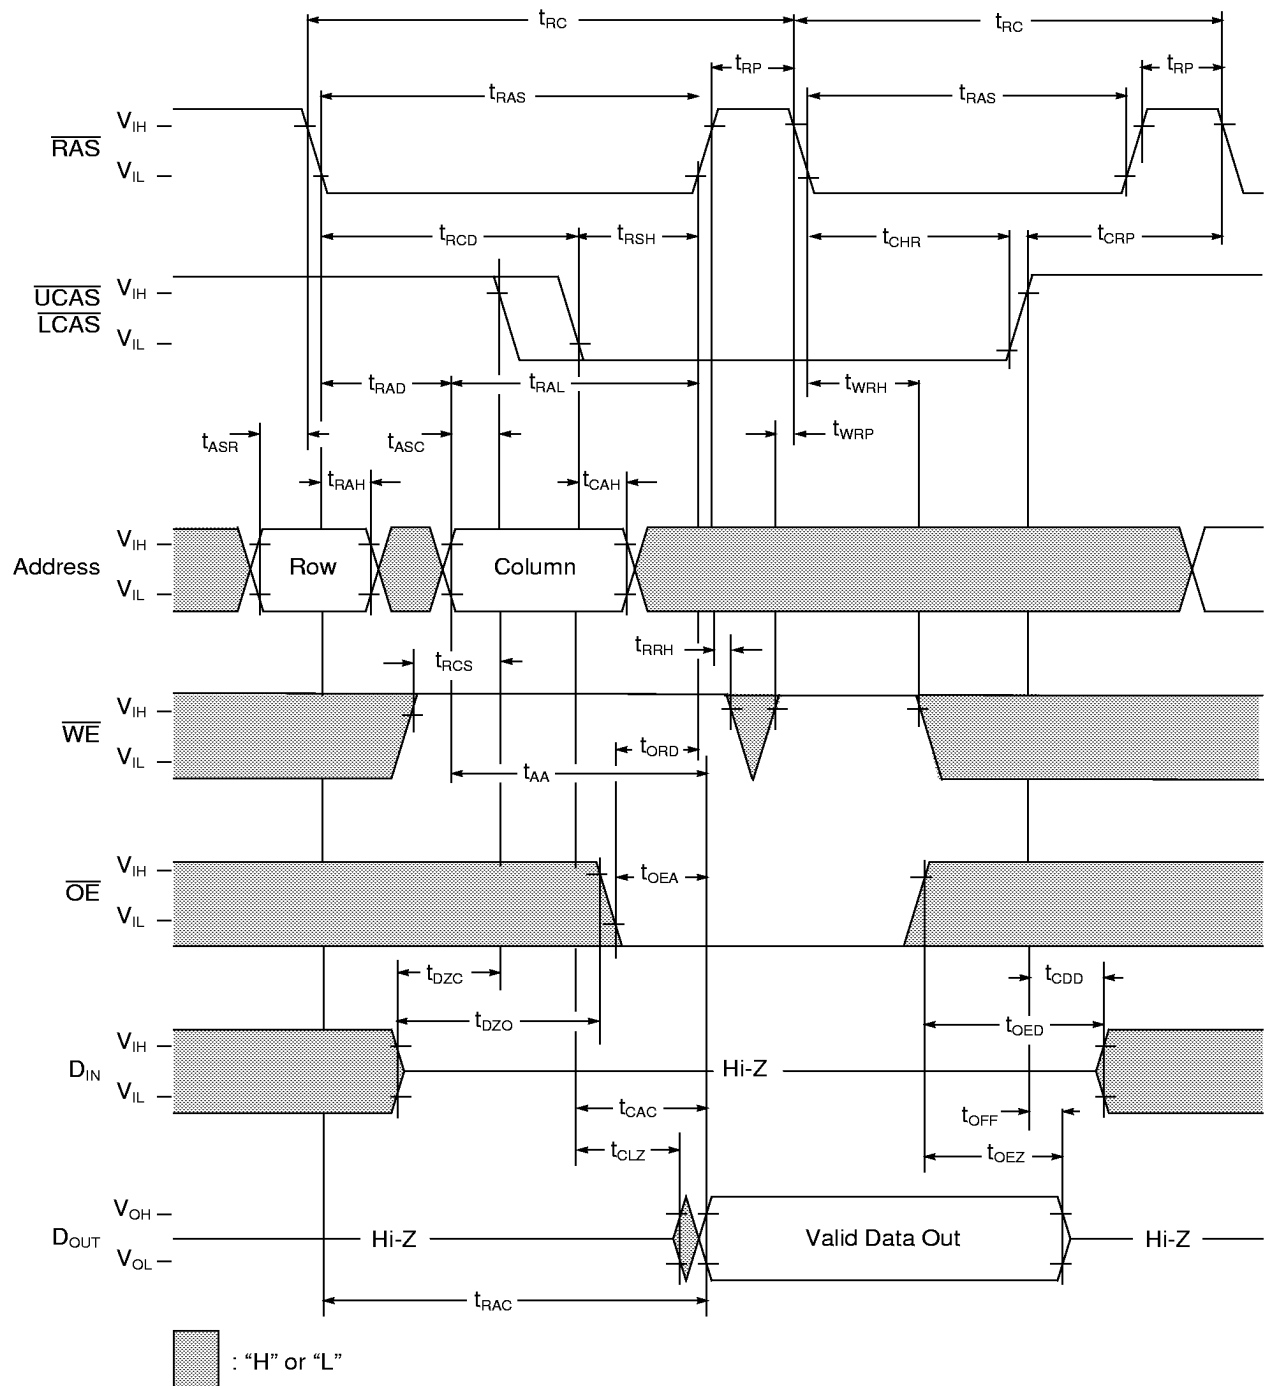

Hidden Refresh Cycle (Write)

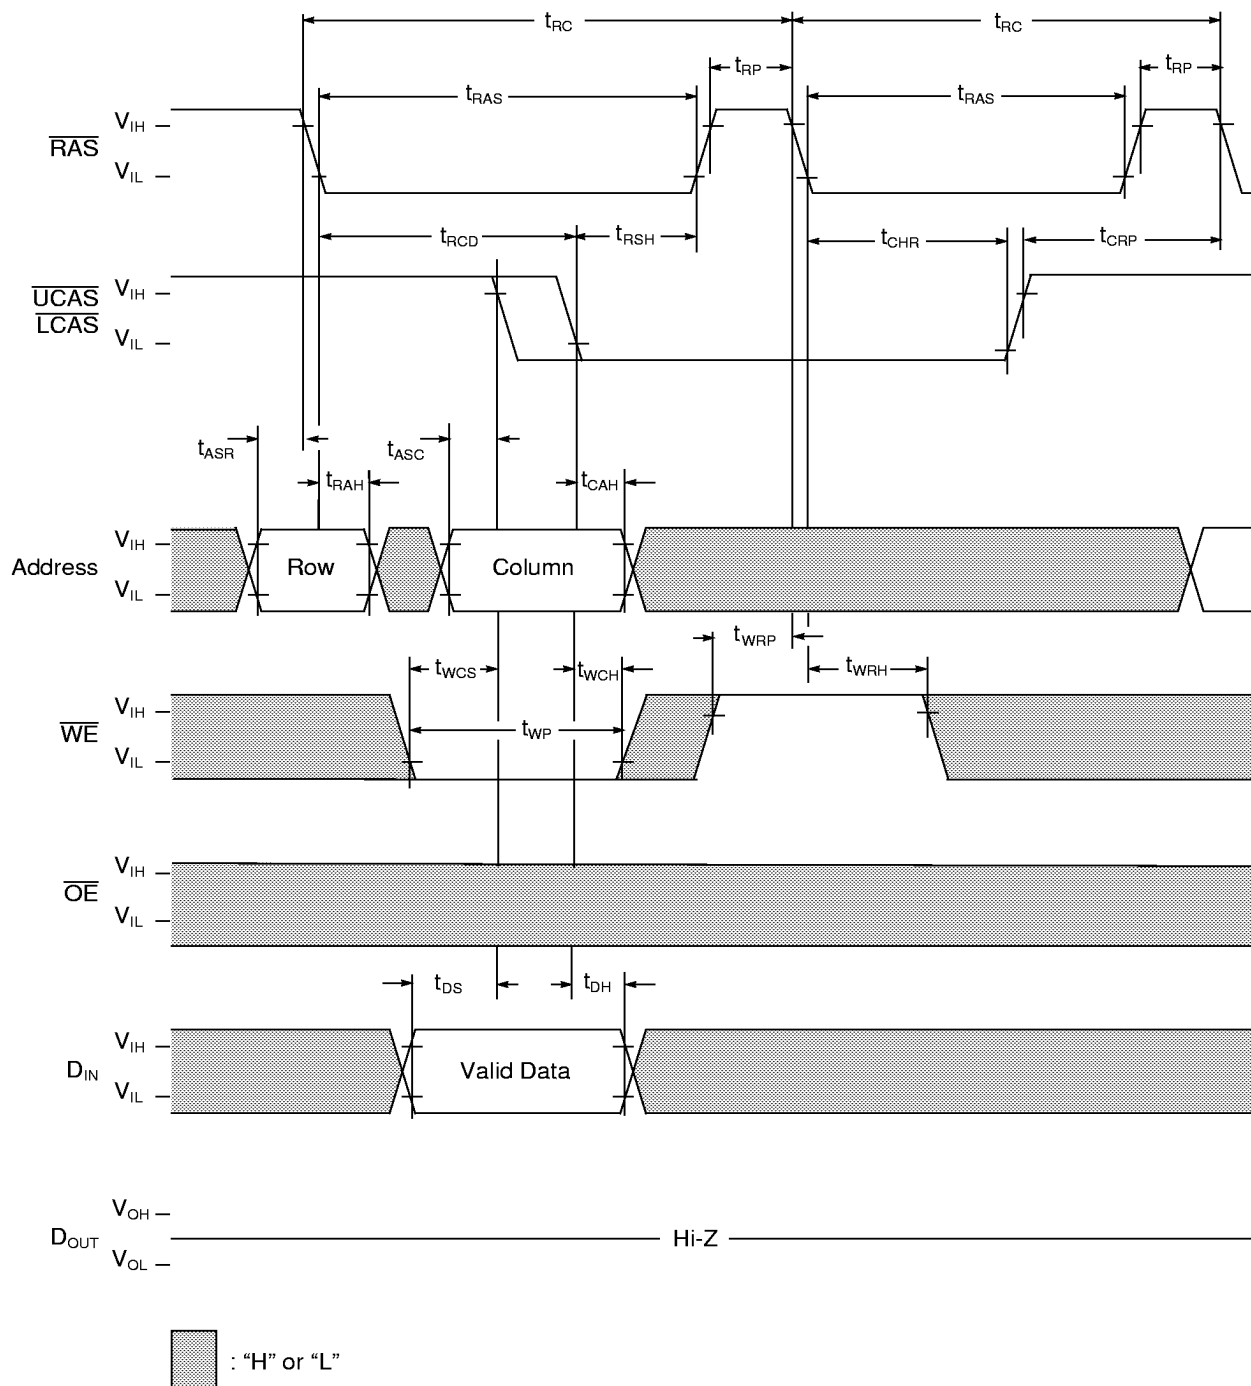


Self Refresh Cycle (Sleep Mode) - Low Power version only

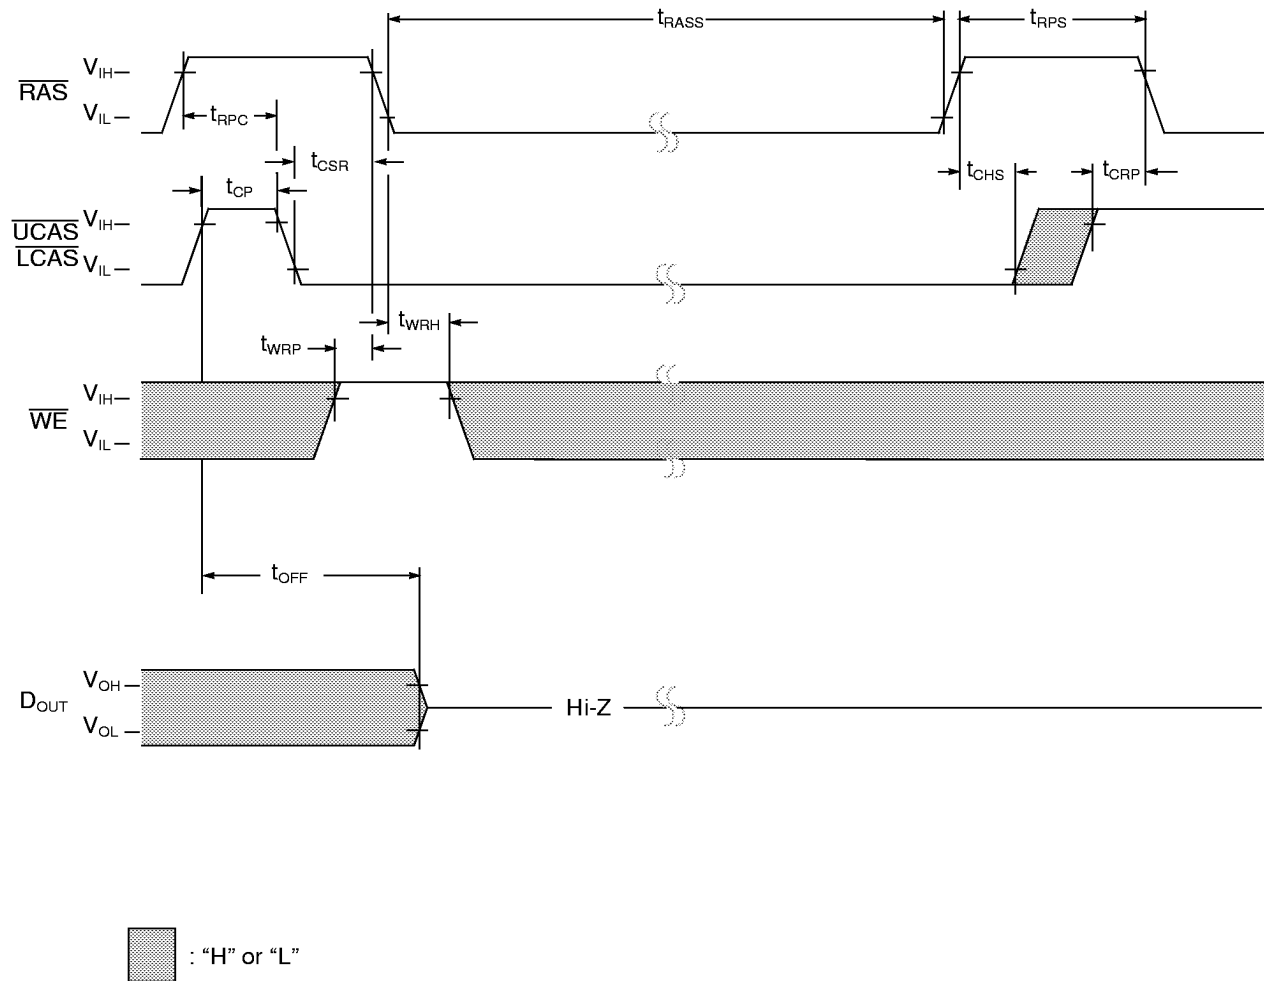

NOTE: Address and OE are "H" or "L"

Once t_{RASS} (min) is provided and RAS remains low, the DRAM will be in Self Refresh, commonly known as "Sleep Mode."

Presence Detect (EEPROM) Bus Timing

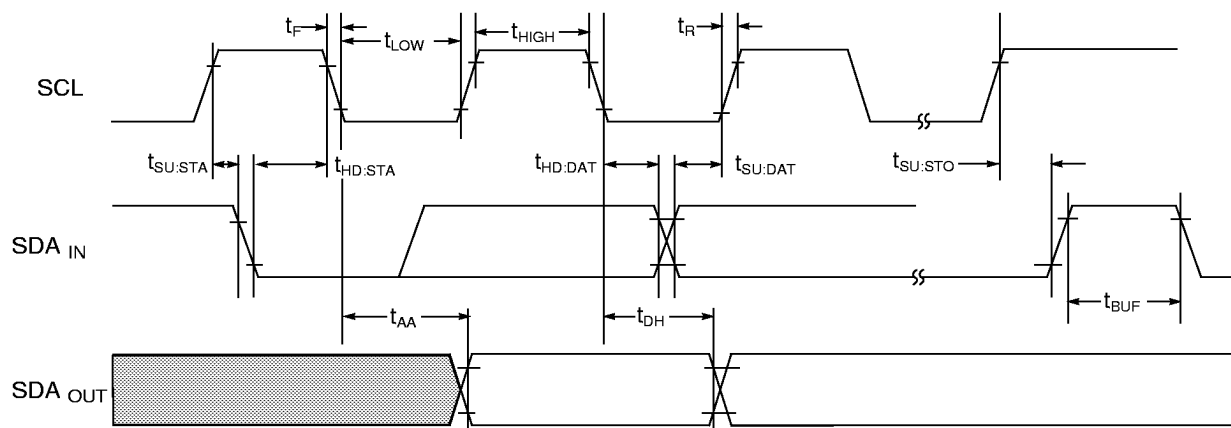

Presence Detect Operation

Clock and Data Conventions: Data states on the SDA line can change only during SCL low. SDA state changes during SCL HIGH are reserved for indicating start and stop conditions (Figure 1 & Figure 2).

Start Condition: All commands are preceded by the start condition, which is a HIGH to LOW transition of SDA when SCL is high. The serial PD device continuously monitors the SDA and SCL lines for the start condition and will not respond to any command until this condition has been met.

Stop Condition: All communications are terminated by a stop condition, which is a LOW to HIGH transition of SDA when SCL is HIGH. The stop condition is also used to place the serial PD device into standby power mode.

Acknowledge: Acknowledge is a software convention used to indicate successful data transfers. The transmitting device, either master or slave, will release the bus after transmitting eight bits. During the ninth clock cycle the receiver will pull the SDA line LOW to acknowledge that it received the eight bits of data (Figure 3).

The PD device will always respond with an acknowledge after recognition of a start condition and its slave address. If both the device and a write operation have been selected, The PD device, will respond with an acknowledge after the receipt of each subsequent eight bit word. In the read mode the PD device will transmit eight bits of data, release the SDA line and monitor the line for an acknowledge. If an acknowledge is detected and no

stop condition is generated by the master, the slave will continue to transmit data. If an acknowledge is not detected, the slave will terminate further data transmissions and await the stop condition to return to standby power mode.

Figure 1. Data Window

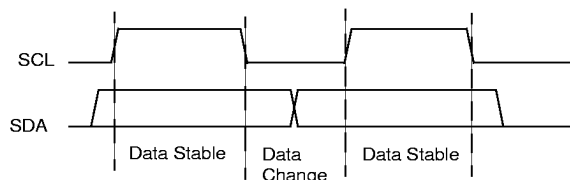


Figure 2. Definition of Start & Stop



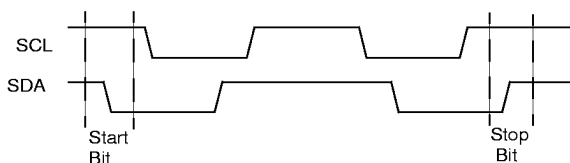


Figure 3. Acknowledge Response From Receiver

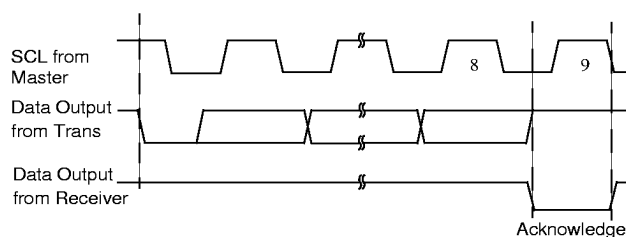

Layout Drawing

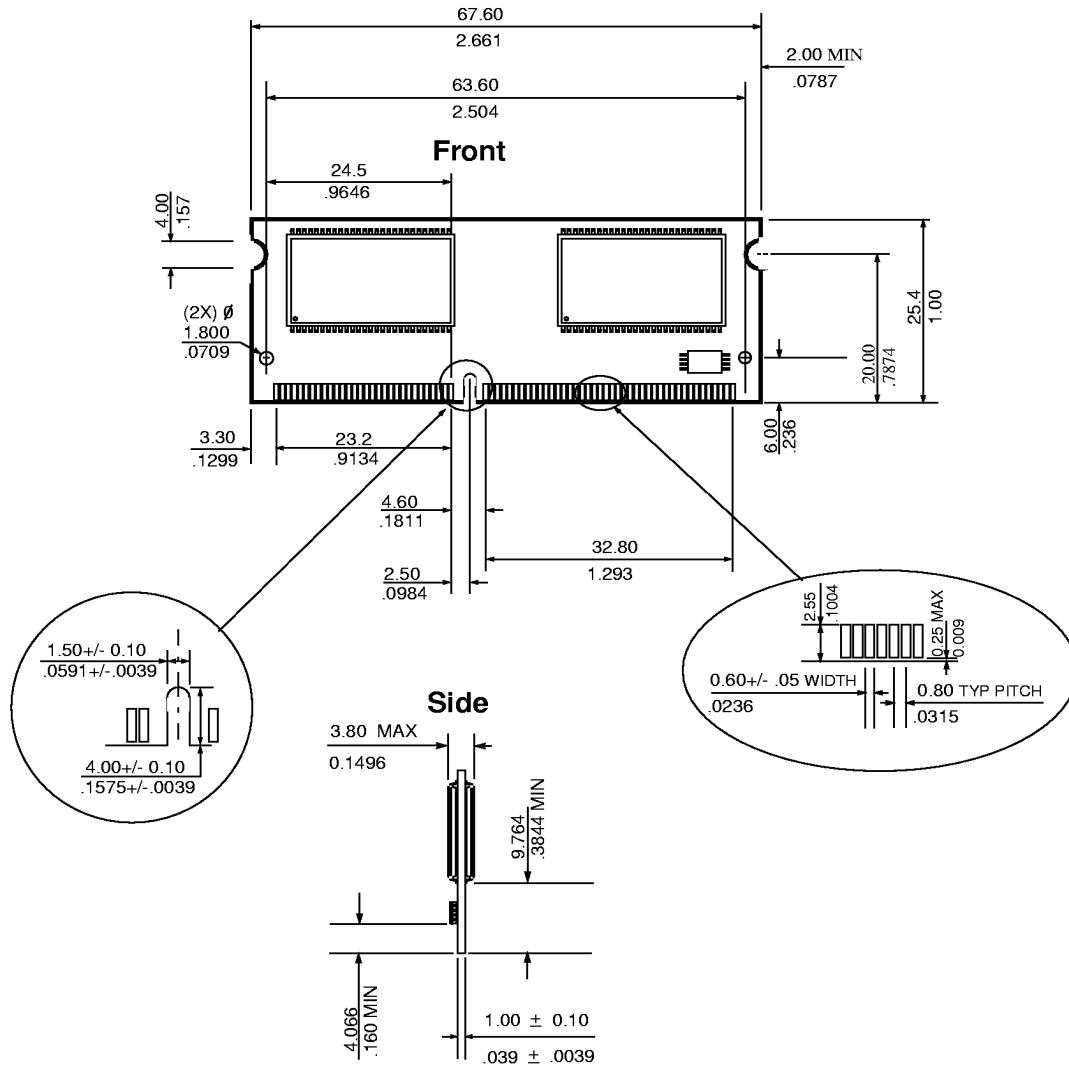

Note: All dimensions are typical unless otherwise stated.

MILLIMETERS
INCHES

Revision Log

Rev	Contents of Modification
1/96	Initial Release.
4/96	Correct typo's
7/96	Corrected typo in features
8/96	Corrected typo in Serial Presence Detect table (refresh rate/type)
11/96	Corrected typo in Serial Presence Detect table Changed t _{ODD} to t _{OED}