



# Series IAC, (S)MIAC, X4IAC

## AC Input Modules

- Status Indicating LED on X4 Series
- UL, CSA, and CE

Solid state I/O switching modules deliver an electrically clean, photo-isolated, noise-free "output" interface from logic level control systems to external loads such as motors, valves, solenoids, etc. -- or an "input" interface from the load or sensors to microprocessor or computer-based logic level systems. Designed for long, reliable service in demanding industrial environments.

### INPUT SPECIFICATIONS

|                                        | IAC5<br>(S)MIAC5<br>X4IAC5 | IAC15<br>(S)MIAC15<br>X4IAC15 | IAC24<br>(S)MIAC24<br>X4IAC24 | IAC5A<br>(S)MIAC5A<br>X4IAC5A | IAC15A<br>(S)MIAC15A<br>X4IAC15A | IAC24A<br>(S)MIAC24A<br>X4IAC24A |
|----------------------------------------|----------------------------|-------------------------------|-------------------------------|-------------------------------|----------------------------------|----------------------------------|
| Nominal input voltage [Vrms/Vdc]       | 120                        | 120                           | 120                           | 240                           | 240                              | 240                              |
| Minimum Input Voltage [Vrms/Vdc]       | 90                         | 90                            | 90                            | 180                           | 180                              | 180                              |
| Maximum Input Voltage [Vrms/Vdc]       | 140                        | 140                           | 140                           | 280                           | 280                              | 280                              |
| Maximum Input Current [mA rms]         | 10                         | 10                            | 10                            | 8                             | 8                                | 8                                |
| Drop Out Current [mA rms]              | 2.5                        | 2.5                           | 2.5                           | 1.5                           | 1.5                              | 1.5                              |
| Allowable Off-state Current [mA rms]   | 3.0                        | 3.0                           | 3.0                           | 2.0                           | 2.0                              | 2.0                              |
| Allowable Off-state Voltage [Vrms/Vdc] | 50.0                       | 50.0                          | 50.0                          | 120                           | 120                              | 120                              |

### OUTPUT SPECIFICATIONS

|                                         | 5       | 15        | 24        | 5       | 15        | 24        |
|-----------------------------------------|---------|-----------|-----------|---------|-----------|-----------|
| Nominal Logic Voltage [Vdc]             | 5       | 15        | 24        | 5       | 15        | 24        |
| Minimum Logic Voltage [Vdc] (X4 Series) | 1.5 (3) | 8.5 (10)  | 16.5 (18) | 1.5 (3) | 8.5 (10)  | 16.5 (18) |
| Maximum Logic Voltage [Vdc] (X4 Series) | 6.0 (7) | 18.5 (20) | 30.5 (32) | 6.0 (7) | 18.5 (20) | 30.5 (32) |
| Typical Logic Supply Current [mAdc]     | 10      | 10        | 10        | 10      | 10        | 10        |
| Max. Logic Supply Current [mAdc]        | 18.5    | 16        | 14        | 18.5    | 16        | 14        |
| Max. Logic Sup. Leak. Current [μAdc]    | 10      | 10        | 10        | 10      | 10        | 10        |
| Maximum Output Voltage [Vdc]            | 30      | 30        | 30        | 30      | 30        | 30        |
| Maximum Output Current [mAdc]           | 50      | 50        | 50        | 50      | 50        | 50        |
| Max. Output Leakage Current [μAdc]      | 10      | 10        | 10        | 10      | 10        | 10        |
| Max. Output Voltage Drop [mVdc]         | 200     | 200       | 200       | 200     | 200       | 200       |
| Maximum Turn-on Time [msec]             | 20      | 20        | 20        | 20      | 20        | 20        |
| Maximum Turn-off Time [msec]            | 30      | 30        | 30        | 30      | 30        | 30        |

©1998 CRYDOM CORP Specifications subject to change without notice.





# Series IAC, (S)MIAC, X4IAC


## AC Input Modules

### GENERAL SPECIFICATIONS


|                             |               |
|-----------------------------|---------------|
| Operating temperature range | -30 to +80°C  |
| Storage temperature range   | -40 to +100°C |
| Isolation                   | 4,000 V rms   |
| Capacitance input to output | 8 pF          |
| Line frequency range        | 47 to 63 Hz   |
| Package Color               | Yellow        |

### WIRING & MECHANICAL DIAGRAMS


#### Standard Series, IAC

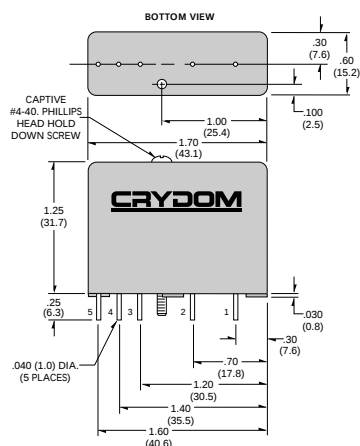

#### Standard and Mini Pack




#### X4 Series




#### MINI-PACK Series, (S)MIAC


##### SM Prefix

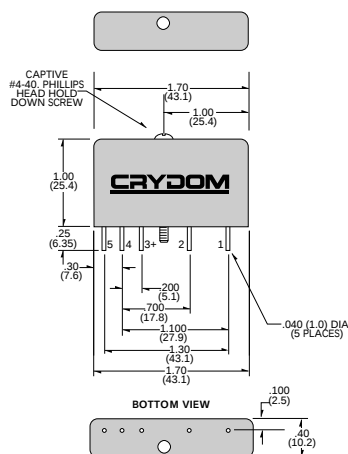

##### M Prefix

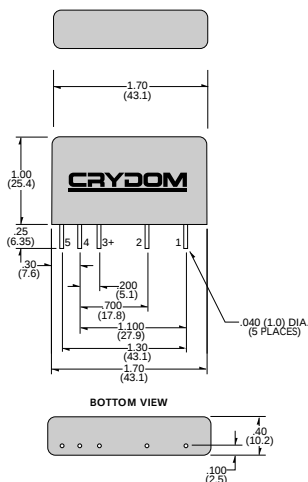

#### X4 Series, X4IAC

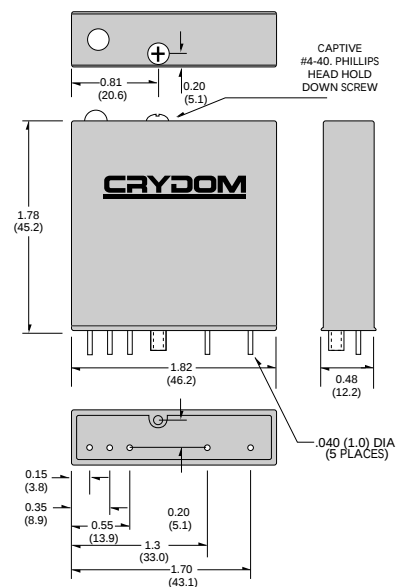

### APPLICATION NOTES

- Do not install or remove modules in live (electrically hot) circuits. High voltage may be present.
- An externally located commutating diode must be installed across inductive loads
- I/O module boards also available

All dimensions are in inches (millimeters)

©1998 CRYDOM CORP Specifications subject to change without notice.

For recommended applications and more information contact:

USA: (800) 8 CRYDOM • (800) 827-9366 • (619) 715-7200 • fax (619) 715-7280

Crydom Corp, 9525 Chesapeake Drive, San Diego, CA 92123 • e-mail: sales@crydom.com

WEB SITE: <http://www.crydom.com> FASTFAX Product Information: (888) 267-9191

UK: (44)1202 812300 • fax (44)1202 812340 Crydom International Ltd., 85, Condor Close, Woolbridge Industrial Estate, Three-Legged Cross, Wimborne, Dorset, England BH21 6SU

GERMANY: (49) (0)6874 182580 • fax (49)(0)6874 182585 Crydom GmbH, Gewerbegebiet Im Schachen, D-66687 Nunkirchen, Germany • e-mail: Vertrieb@crydom.com

