

# Hex inverter schmitt trigger

**74F14**

## FEATURE

- Industrial temperature range available (−40°C to +85°C)

## DESCRIPTION

The 74F14 contains six logic inverters which accept standard TTL input signals and provide standard TTL output levels. They are capable of transforming slowly changing input signals into sharply defined, jitter free output signals. In addition, they have greater noise margin than conventional inverters. Each circuit contains a Schmitt trigger followed by a Darlington level shifter and a phase splitter driving a TTL totem-pole output. The Schmitt trigger uses positive feedback to effectively speed-up slow input transitions, and provide different input threshold voltages for positive-going and negative-going input threshold (typically 800mV) is determined internally by resistor ratios and is insensitive to temperature and supply voltage variations.

| TYPE  | TYPICAL PROPAGATION DELAY | TYPICAL SUPPLY CURRENT( TOTAL) |
|-------|---------------------------|--------------------------------|
| 74F14 | 5.0ns                     | 18mA                           |

## ORDERING INFORMATION

| DESCRIPTION        | ORDER CODE                                                                               |                                                                                            |
|--------------------|------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
|                    | COMMERCIAL RANGE<br>$V_{CC} = 5V \pm 10\%$ ,<br>$T_{amb} = 0^{\circ}C$ to $+70^{\circ}C$ | INDUSTRIAL RANGE<br>$V_{CC} = 5V \pm 10\%$ ,<br>$T_{amb} = -40^{\circ}C$ to $+85^{\circ}C$ |
| 14-pin plastic DIP | N74F14N                                                                                  | I74F14N                                                                                    |
| 14-pin plastic SO  | N74F14D                                                                                  | I74F14D                                                                                    |


## INPUT AND OUTPUT LOADING AND FAN OUT TABLE

| PINS        | DESCRIPTION | 74F (U.L.)<br>HIGH/LOW | LOAD VALUE<br>HIGH/LOW |
|-------------|-------------|------------------------|------------------------|
| Dn          | Data inputs | 1.0/1.0                | 20 $\mu$ A/0.6mA       |
| $\bar{Q}_n$ | Data output | 50/33                  | 1.0mA/20mA             |

Note to input and output loading and fan out table

- One (1.0) FAST unit load is defined as: 20 $\mu$ A in the high state and 0.6mA in the low state.

## LOGIC DIAGRAM

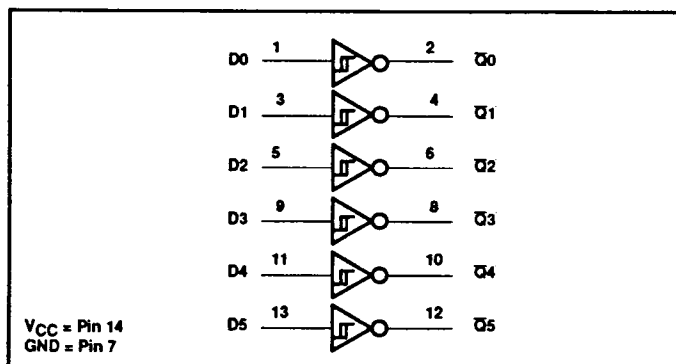


## FUNCTION TABLE

| INPUTS | OUTPUT      |
|--------|-------------|
| Dn     | $\bar{Q}_n$ |
| L      | H           |
| H      | L           |


Notes to function table

- H = High voltage level
- L = Low voltage level


## PIN CONFIGURATION

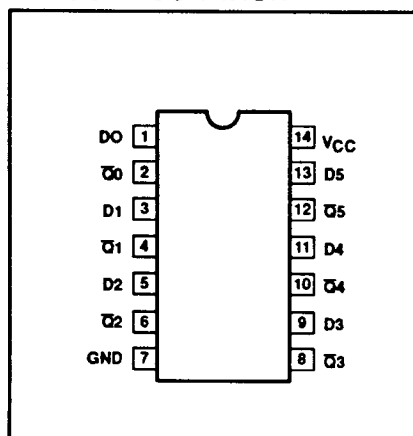

## LOGIC SYMBOL

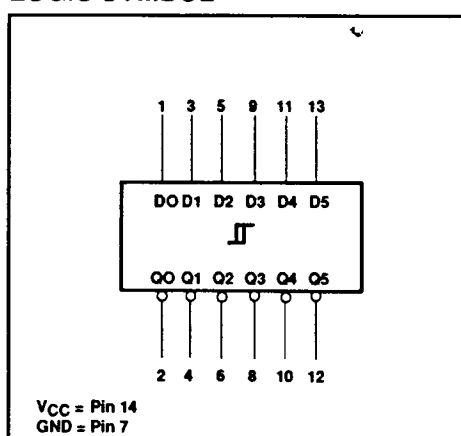

## IEC/IEEE SYMBOL

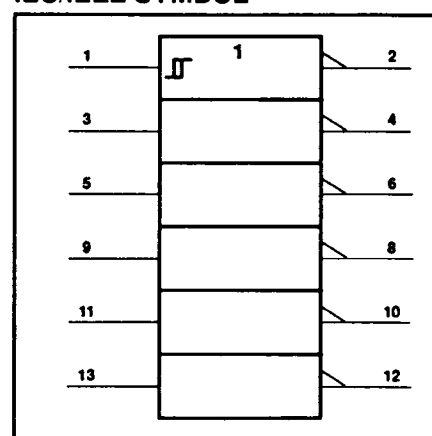

## Hex inverter schmitt trigger

74F14

## ABSOLUTE MAXIMUM RATINGS

(Operation beyond the limit set forth in this table may impair the useful life of the device. Unless otherwise noted these limits are over the operating free air temperature range.)

| SYMBOL    | PARAMETER                                      |                  | RATING           | UNIT |
|-----------|------------------------------------------------|------------------|------------------|------|
| $V_{CC}$  | Supply voltage                                 |                  | -0.5 to +7.0     | V    |
| $V_{IN}$  | Input voltage                                  |                  | -0.5 to +7.0     | V    |
| $I_{IN}$  | Input current                                  |                  | -30 to +5        | mA   |
| $V_{OUT}$ | Voltage applied to output in high output state |                  | -0.5 to $V_{CC}$ | V    |
| $I_{OUT}$ | Current applied to output in low output state  |                  | 40               | mA   |
| $T_{amb}$ | Operating free air temperature range           | Commercial range | 0 to +70         | °C   |
|           |                                                | Industrial range | -40 to +85       | °C   |
| $T_{stg}$ | Storage temperature range                      |                  | -65 to +150      | °C   |

## RECOMMENDED OPERATING CONDITIONS

| SYMBOL    | PARAMETER                            |                  | LIMITS |     |     | UNIT |
|-----------|--------------------------------------|------------------|--------|-----|-----|------|
|           |                                      |                  | MIN    | NOM | MAX |      |
| $V_{CC}$  | Supply voltage                       |                  | 4.5    | 5.0 | 5.5 | V    |
| $V_{IH}$  | High-level input voltage             |                  | 2.0    |     |     | V    |
| $V_{IL}$  | Low-level input voltage              |                  |        |     | 0.8 | V    |
| $I_{IK}$  | Input clamp current                  |                  |        |     | -18 | mA   |
| $I_{OH}$  | High-level output current            |                  |        |     | -1  | mA   |
| $I_{OL}$  | Low-level output current             |                  |        |     | 20  | mA   |
| $T_{amb}$ | Operating free air temperature range | Commercial range | 0      |     | +70 | °C   |
|           |                                      | Industrial range | -40    |     | +85 | °C   |

## DC ELECTRICAL CHARACTERISTICS

(Over recommended operating free-air temperature range unless otherwise noted.)

| SYMBOL       | PARAMETER                                 | TEST CONDITIONS <sup>1</sup>                                            |                                                | LIMITS |                  |      | UNIT    |
|--------------|-------------------------------------------|-------------------------------------------------------------------------|------------------------------------------------|--------|------------------|------|---------|
|              |                                           |                                                                         |                                                | MIN    | TYP <sup>2</sup> | MAX  |         |
| $V_{T+}$     | Positive-going threshold                  | $V_{CC} = 5.0V$                                                         |                                                | 1.4    | 1.7              | 2.0  | V       |
| $V_{T-}$     | Negative-going threshold                  | $V_{CC} = 5.0V$                                                         |                                                | 0.7    | 0.9              | 1.1  | V       |
| $\Delta V_T$ | Hysteresis ( $V_{T+} - V_{T-}$ )          | $V_{CC} = 5.0V$                                                         |                                                | 0.4    | 0.8              |      | V       |
| $V_{OH}$     | High-level output voltage                 | $V_{CC} = \text{MIN}, V_I = V_{T-\text{MIN}},$<br>$I_{OH} = \text{MAX}$ | $\pm 10\% V_{CC}$                              | 2.5    |                  |      | V       |
|              |                                           |                                                                         | $\pm 5\% V_{CC}$                               | 2.7    | 3.4              |      | V       |
| $V_{OL}$     | Low-level output voltage                  | $V_{CC} = \text{MIN}, V_I = V_{T+\text{MAX}},$<br>$I_{OL} = \text{MAX}$ | $\pm 10\% V_{CC}$                              |        | 0.30             | 0.50 | V       |
|              |                                           |                                                                         | $\pm 5\% V_{CC}$                               |        | 0.30             | 0.50 | V       |
| $V_{IK}$     | Input clamp voltage                       | $V_{CC} = \text{MIN}, I_I = I_{IK}$                                     |                                                |        | -0.73            | -1.2 | V       |
| $I_{T+}$     | Input current at positive-going threshold | $V_{CC} = 5.0V, V_I = V_{T+}$                                           |                                                |        | 0                |      | $\mu A$ |
| $I_{T-}$     | Input current at negative-going threshold | $V_{CC} = 5.0V, V_I = V_{T-}$                                           |                                                |        | -175             |      | $\mu A$ |
| $I_I$        | Input current at maximum input voltage    | $V_{CC} = \text{MAX}, V_I = 7.0V$                                       |                                                |        |                  | 100  | $\mu A$ |
| $I_{IH}$     | High-level input current                  | $V_{CC} = \text{MAX}, V_I = 2.7V$                                       |                                                |        |                  | 20   | $\mu A$ |
| $I_{IL}$     | Low-level input current                   | $V_{CC} = \text{MAX}, V_I = 0.5V$                                       |                                                |        |                  | -0.6 | mA      |
| $I_{OS}$     | Short-circuit output current <sup>3</sup> | $V_{CC} = \text{MAX}$                                                   |                                                | -60    |                  | -150 | mA      |
| $I_{CC}$     | Supply current (total)                    | $I_{CCH}$                                                               | $V_{CC} = \text{MAX}$<br>$V_{IN} = \text{GND}$ |        | 13               | 22   | mA      |
|              |                                           | $I_{CCL}$                                                               | $V_{CC} = \text{MAX}$<br>$V_{IN} = 4.5V$       |        | 23               | 32   | mA      |

## Hex inverter schmitt trigger

74F14


## Notes to DC electrical characteristics

- For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.
- All typical values are at  $V_{CC} = 5V$ ,  $T_{amb} = 25^{\circ}C$ .
- Not more than one output should be shorted at a time. For testing  $I_{OS}$ , the use of high-speed test apparatus and/or sample-and-hold techniques are preferable in order to minimize internal heating and more accurately reflect operational values. Otherwise, prolonged shorting of a high output may raise the chip temperature well above normal and thereby cause invalid readings in other parameter tests. In any sequence of parameter tests,  $I_{OS}$  tests should be performed last.

## AC ELECTRICAL CHARACTERISTICS

| SYMBOL                 | PARAMETER                     | TEST<br>CONDITION | LIMITS                                                                            |            |            |                                                                                                                   |            |                                                                                                                     |             |    | UNIT |
|------------------------|-------------------------------|-------------------|-----------------------------------------------------------------------------------|------------|------------|-------------------------------------------------------------------------------------------------------------------|------------|---------------------------------------------------------------------------------------------------------------------|-------------|----|------|
|                        |                               |                   | $T_{amb} = +25^{\circ}C$<br>$V_{CC} = +5.0V$<br>$C_L = 50pF$<br>$R_L = 500\Omega$ |            |            | $T_{amb} = 0^{\circ}C \text{ to } +70^{\circ}C$<br>$V_{CC} = +5.0V \pm 10\%$<br>$C_L = 50pF$<br>$R_L = 500\Omega$ |            | $T_{amb} = -40^{\circ}C \text{ to } +85^{\circ}C$<br>$V_{CC} = +5.0V \pm 10\%$<br>$C_L = 50pF$<br>$R_L = 500\Omega$ |             |    |      |
|                        |                               |                   | MIN                                                                               | TYP        | MAX        | MIN                                                                                                               | MAX        | MIN                                                                                                                 | MAX         |    |      |
|                        |                               |                   |                                                                                   |            |            |                                                                                                                   |            |                                                                                                                     |             |    |      |
| $t_{PLH}$<br>$t_{PHL}$ | Propagation delay<br>Dn to Qn | Waveform 1        | 4.0<br>3.5                                                                        | 6.5<br>5.0 | 8.5<br>6.5 | 4.0<br>3.5                                                                                                        | 9.5<br>7.0 | 3.0<br>3.5                                                                                                          | 10.5<br>9.0 | ns |      |

## AC WAVEFORMS

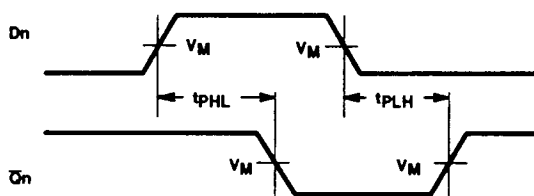


Waveform 1. Propagation delay for inverting outputs

## Note to AC Waveforms

- For all waveforms,  $V_M = 1.5V$ .


## TEST CIRCUIT AND WAVEFORMS

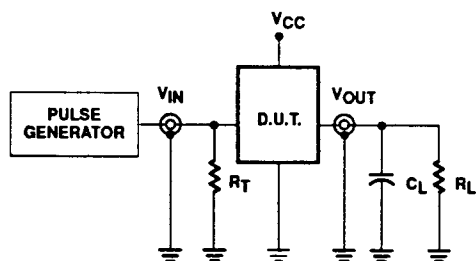

Test circuit for totem-pole outputs

## DEFINITIONS:

- $R_L$  = Load resistor; see AC electrical characteristics for value.  
 $C_L$  = Load capacitance includes jig and probe capacitance; see AC electrical characteristics for value.  
 $R_T$  = Termination resistance should be equal to  $Z_{OUT}$  of pulse generators.

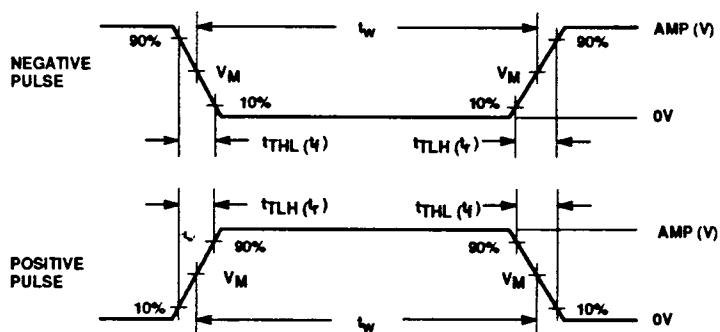

Input pulse definition

| family | INPUT PULSE REQUIREMENTS |       |           |       |           |           |
|--------|--------------------------|-------|-----------|-------|-----------|-----------|
|        | amplitude                | $V_M$ | rep. rate | $t_w$ | $t_{TLH}$ | $t_{THL}$ |
| 74F    | 3.0V                     | 1.5V  | 1MHz      | 500ns | 2.5ns     | 2.5ns     |