

SIEMENS

SIEMENS AKTIENGESELLSCHAFT 47E D

T-46-23-18

1M x 4-Bit Dynamic RAM**HYB 514400A-60/-70/-80****Advance Information**

- 1 048 576 words by 4-bit organization
- 0 to 70 °C operating temperature
- Fast access and cycle time
 - RAS access time:
 - 60 ns (-60 version)
 - 70 ns (-70 version)
 - 80 ns (-80 version)
 - Cycle time:
 - 110 ns (-60 version)
 - 130 ns (-70 version)
 - 150 ns (-80 version)
 - CAS access time:
 - 20 ns (-60, -70, -80 version)
- Fast page mode cycle time
 - 40 ns (-60 version)
 - 45 ns (-70 version)
 - 50 ns (-80 version)
- Single + 5 V ($\pm 10\%$) supply
- Low power dissipation
 - max. 605 active mW (-60 version)
 - max. 550 active mW (-70 version)
 - max. 495 active mW (-80 version)
 - max. 11 mW standby (TTL)
 - max. 5.5 mW standby (MOS)
- Output unlatched at cycle end allows two-dimensional chip selection
- Read, write, read-modify-write, CAS-before-RAS refresh, RAS-only refresh, hidden refresh, test mode
- Fast page mode capability
- All inputs, outputs and clocks fully TTL-compatible
- 1024 refresh cycles/16 ms
- Plastic Package: P-SQJ-26/20 300 mil
P-ZIP-20 400 mil

The HYB 514400A is the new generation dynamic RAM organized as 1 048 576 words by 4-bits. The HYB 514400A utilizes a submicron CMOS silicon gate process technology, as well as advanced circuit techniques to provide wide operating margins, both internally and for the system user. Multiplexed address inputs permit the HYB 514400A to be packaged in a standard SOJ 26/20 300 mil or ZIP-20 400 mil are package. These packages provide high system bit densities and are compatible with commonly used automatic testing and insertion equipment. System-oriented features include single + 5 V ($\pm 10\%$) power supply, direct interfacing with high-performance logic device families such as Schottky TTL.


T-46-23-18

Ordering Information


Type	Ordering code	Package	Description
HYB 514400AJ-60	Q76100-Q589	P-SOJ-26/20 300 mil	DRAM (access time 60 ns)
HYB 514400AJ-70	Q76100-Q590	P-SOJ-26/20 300 mil	DRAM (access time 70 ns)
HYB 514400AJ-80	Q76100-Q591	P-SOJ-26/20 300 mil	DRAM (access time 80 ns)
HYB 514400AZ-60	Q76100-Q592	P-ZIP-20	DRAM (access time 60 ns)
HYB 514400AZ-70	Q76100-Q593	P-ZIP-20	DRAM (access time 70 ns)
HYB 514400AZ-80	Q76100-Q594	P-ZIP-20	DRAM (access time 80 ns)

Pin Configuration

P-SOJ-26/20

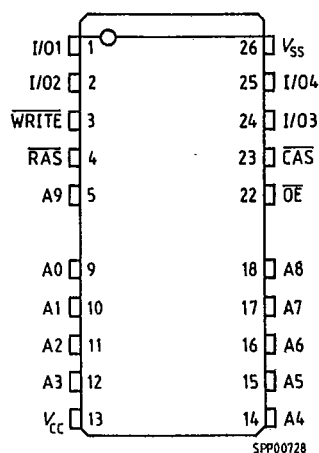

P-ZIP-20

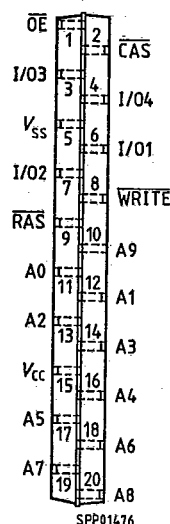


Pin Names

A0-A9	Address Inputs
RAS	Row Address Strobe
OE	Output Enable
I/O1-I/O4	Data Input/Output

CAS	Column Address Strobe
WRITE	Read/Write Input
Vcc	Power Supply (+ 5 V)
Vss	Ground (0 V)

T-46-23-18

Block Diagram

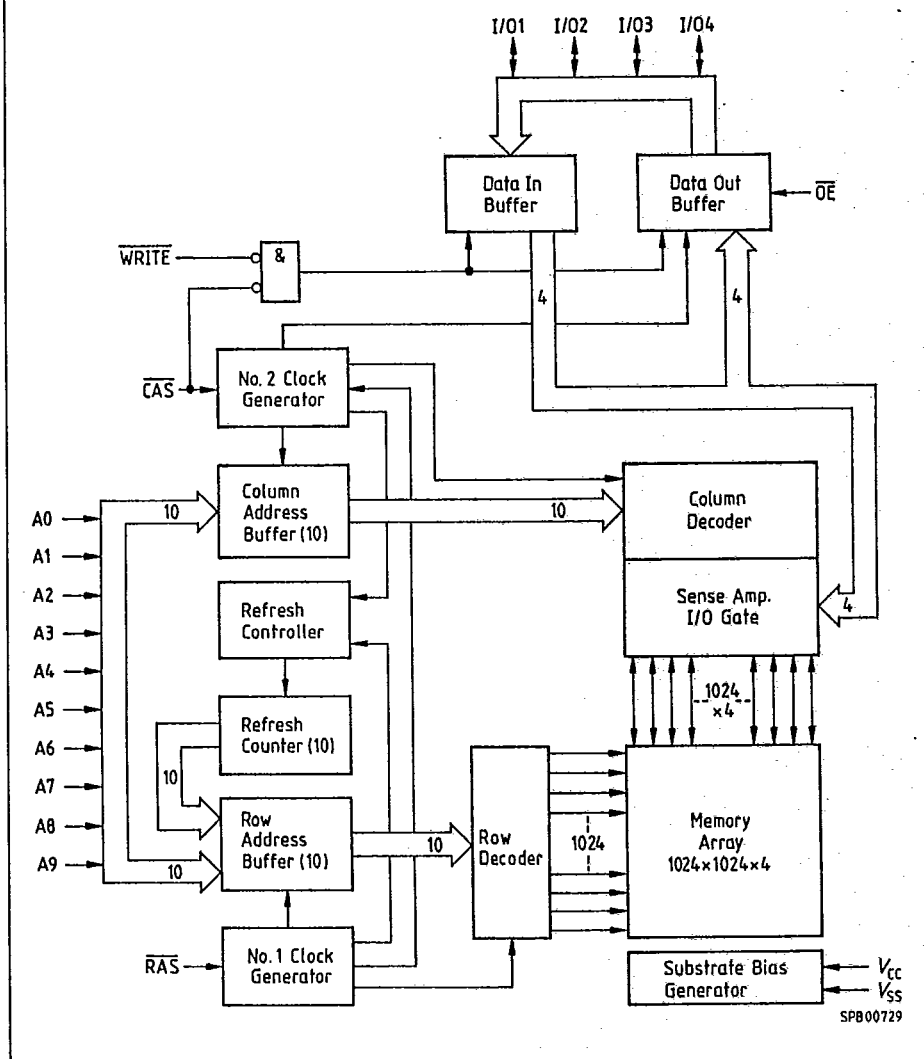

Absolute Maximum Ratings

T-46-23-18

Operating temperature range	0 to 70 °C
Storage temperature range	- 55 to 150 °C
Soldering temperature	260 °C
Soldering time	10 s
Input/output voltage	- 1 to 7 V
Power supply voltage	- 1 to 7 V
Power dissipation	0.7 W
Data out current (short circuit)	50 mA

Note: Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

DC Characteristics

$T_A = 0$ to 70 °C; $V_{SS} = 0$ V; $V_{CC} = 5$ V ± 10 %; $t_T = 5$ ns

Parameter	Symbol	Limit Values		Unit	Test Condition
		min.	max.		
Input high voltage	V_{IH}	2.4	6.5	V	1)
Input low voltage	V_{IL}	- 1.0	0.8	V	1)
Output high voltage ($I_{out} = - 5$ mA)	V_{OH}	2.4	-	V	1)
Output low voltage ($I_{out} = 4.2$ mA)	V_{OL}	-	0.4	V	1)
Input leakage current ($0 \text{ V} \leq V_{IH} \leq 7 \text{ V}$, all other pins = 0 V)	I_{IL}	- 10	10	μ A	1)
Output leakage current (DO is disabled, $0 \text{ V} \leq V_{out} \leq 7 \text{ V}$)	I_{OL}	- 10	10	μ A	1)
Average V_{CC} supply current: HYB 514400A-60 HYB 514400A-70 HYB 514400A-80 ($\overline{RAS}$, $\overline{CAS}$, address cycling: $t_{RC} = t_{RC \text{ min.}}$)	I_{CC1}	-	110 100 90	mA mA mA	2) 3) 2) 3) 2) 3)
Standby V_{CC} supply current ($\overline{RAS} = \overline{CAS} = V_{IH}$)	I_{CC2}	-	2	mA	-
Average V_{CC} supply current, during RAS-only refresh cycles: HYB 514400A-60 HYB 514400A-70 HYB 514400A-80 ($\overline{RAS}$ cycling, $\overline{CAS} = V_{IH}$; $t_{RC} = t_{RC \text{ min.}}$)	I_{CC3}	-	110 100 90	mA mA mA	2) 2) 2)
Average V_{CC} supply current, during fast page mode: HYB 514400A-60 HYB 514400A-70 HYB 514400A-80 ($\overline{RAS} = V_{IL}$, $\overline{CAS}$, address cycling: $t_{RC} = t_{RC \text{ min.}}$)	I_{CC4}	-	70 60 50	mA mA mA	2) 3) 2) 3) 2) 3)
Standby V_{CC} supply current: ($\overline{RAS} = \overline{CAS} = V_{CC} - 0.2 \text{ V}$)	I_{CC5}	-	1	mA	1)

Notes see page 8.

T-46-23-18

DC Characteristics (cont'd)

Parameter	Symbol	Limit Values		Unit	Test Condition
		min.	max.		
Average V_{CC} supply current, during $\overline{CAS}$ -before- $\overline{RAS}$ refresh mode:	I_{CC6}	—	110	mA	2)
HYB 514400A-60		—	100	mA	2)
HYB 514400A-70		—	90	mA	2)
HYB 514400A-80					
(RAS, CAS cycling: $t_{RC} = t_{RC \min.}$)					

AC Characteristics ⁴⁾ $T_A = 0$ to 70°C ; $V_{CC} = 5\text{ V} \pm 10\%$; $t_T = 5\text{ ns}$

Parameter	Symbol	Limit Values						Unit
		HYB 514400A-60		HYB 514400A-70		HYB 514400A-80		
		min.	max.	min.	max.	min.	max.	
Random read or write cycle time	t_{RC}	110	—	130	—	150	—	ns
Read-write cycle time	t_{RWC}	165	—	185	—	205	—	ns
Fast page mode cycle time	t_{PC}	45	—	50	—	50	—	ns
Fast page mode read-write cycle time	t_{PRWC}	95	—	100	—	105	—	ns
Access time from $\overline{RAS}$ 6) 11)	t_{RAC}	—	60	—	70	—	80	ns
Access time from $\overline{CAS}$ 6) 11)	t_{CAC}	—	20	—	20	—	20	ns
Access time from column address 6) 12)	t_{AA}	—	30	—	35	—	40	ns
Access time from $\overline{CAS}$ precharge 6)	t_{CPA}	—	35	—	40	—	45	ns
$\overline{CAS}$ to output in low-Z 6)	t_{CLZc}	0	—	0	—	0	—	ns
Output buffer turn-off delay 7)	t_{OFF}	0	20	0	20	0	20	ns
Transition time (rise and fall) 5)	t_T	3	50	3	50	3	50	ns
$\overline{RAS}$ precharge time	t_{RP}	40	—	50	—	60	—	ns
$\overline{RAS}$ pulse width	t_{RAS}	60	10.000	70	10.000	80	10.000	ns
$\overline{RAS}$ pulse width (fast page mode)	t_{RASP}	60	200.000	70	200.000	80	200.000	ns
$\overline{RAS}$ hold time	t_{RSH}	20	—	20	—	20	—	ns
$\overline{CAS}$ hold time	t_{CSH}	60	—	70	—	80	—	ns
$\overline{CAS}$ pulse width	t_{CAS}	20	10.000	20	10.000	20	10.000	ns
$\overline{RAS}$ to $\overline{CAS}$ delay time 11)	t_{RCD}	20	40	20	50	20	60	ns
$\overline{RAS}$ to column address delay time 12)	t_{RAD}	15	30	15	35	15	40	ns
$\overline{CAS}$ to $\overline{RAS}$ precharge time	t_{CRP}	5	—	5	—	5	—	ns

Notes see page 8.

T-46-23-18

AC Characteristics⁴⁾ (cont'd)

Parameter	Symbol	Limit Values						Unit
		HYB 514400A -60		HYB 514400A -70		HYB 514400A -80		
		min.	max.	min.	max.	min.	max.	
CAS precharge time	t _{CPN}	10	—	10	—	10	—	ns
CAS precharge time (fast page mode)	t _{CP}	10	—	10	—	10	—	ns
Row address setup time	t _{ASR}	0	—	0	—	0	—	ns
Row address hold time	t _{RAH}	10	—	10	—	10	—	ns
Column address setup time	t _{ASC}	0	—	0	—	0	—	ns
Column address hold time	t _{CAH}	15	—	15	—	15	—	ns
Column address hold time referenced to RAS	t _{AR}	50	—	55	—	60	—	ns
Column address to RAS lead time	t _{RAL}	30	—	35	—	40	—	ns
Read command setup time	t _{RCS}	0	—	0	—	0	—	ns
Read command hold time	t _{RCH}	0	—	0	—	0	—	ns
Read command hold time referenced to RAS	t _{RRH}	0	—	0	—	0	—	ns
Write command hold time	t _{WCH}	10	—	15	—	15	—	ns
Write command hold time referenced to RAS	t _{WCR}	50	—	55	—	60	—	ns
Write command pulse width	t _{WP}	10	—	15	—	15	—	ns
Write command to RAS lead time	t _{RWL}	20	—	20	—	20	—	ns
Write command to CAS lead time	t _{CWL}	20	—	20	—	20	—	ns
Data setup time	t _{DS}	0	—	0	—	0	—	ns
Data hold time	t _{DH}	15	—	15	—	15	—	ns
Data hold time referenced to RAS	t _{DHR}	50	—	55	—	60	—	ns
Refresh period	t _{REF}	—	16	—	16	—	16	ms
Write command set-up time	t _{WCS}	0	—	0	—	0	—	ns
CAS to WRITE delay time	t _{CWD}	50	—	50	—	50	—	ns
RAS to WRITE delay time	t _{RWD}	90	—	100	—	110	—	ns
Column address to WRITE delay time	t _{AWD}	60	—	65	—	70	—	ns
CAS setup time (CAS-before-RAS cycle)	t _{CSR}	5	—	5	—	5	—	ns
CAS hold time (CAS-before-RAS cycle)	t _{CHR}	15	—	15	—	15	—	ns
RAS to CAS precharge time	t _{RPC}	0	—	0	—	0	—	ns

Notes see page 8.

AC Characteristics ⁴⁾ (cont'd)

T-46-23-18

Parameter	Symbol	Limit Values						Unit
		HYB 514400A -60		HYB 514400A -70		HYB 514400A -80		
		min.	max.	min.	max.	min.	max.	
CAS precharge time (CAS-before-RAS counter test cycle)	t _{CPT}	30	—	40	—	40	—	ns
Write command setup time (in test mode entry cycle)	t _{WTS}	10	—	10	—	10	—	ns
Write command hold time (in test mode entry cycle)	t _{WTH}	10	—	10	—	10	—	ns
Write to RAS precharge time (CAS-before-RAS cycle)	t _{WRP}	10	—	10	—	10	—	ns
Write hold time referenced to RAS (CAS-before-RAS cycle)	t _{WRH}	10	—	10	—	10	—	ns
OE command hold time	t _{OEH}	20	—	20	—	20	—	ns
OE access time	t _{OEa}	—	20	—	20	—	20	ns
RAS hold time referenced to OE	t _{ROH}	10	—	10	—	10	—	ns
Output buffer turn-off delay from OE	t _{OEZ}	0	20	0	20	0	20	ns
Data to CAS low delay	14) t _{DZC}	0	—	0	—	0	—	ns
Data to OE low delay	14) t _{DZO}	0	—	0	—	0	—	ns
CAS high to data delay	15) t _{CDD}	20	—	20	—	20	—	ns
OE high to data delay	15) t _{ODD}	20	—	20	—	20	—	ns
CAS hold time after OE low	t _{OECH}	20	—	20	—	20	—	ns

Notes see page 8.

T-46-23-18

Capacitance $T_A = 0 \text{ to } 25^\circ\text{C}$; $V_{CC} = 5 \text{ V} \pm 10\%$; $f = 1 \text{ MHz}$


Parameter	Symbol	Limit Values		Unit
		min.	max.	
Input capacitance (A0 to A9)	C_{II}	—	6	pF
Input capacitance (RAS, CAS, WRITE, OE)	C_{I2}	—	7	pF
I/O capacitance (I/O1-I/O4)	C_{IO}	—	7	pF

Notes for pages 4 to 7

- 1) All voltages are referenced to V_{SS} .
- 2) I_{CC1} , I_{CC3} , I_{CC4} , and I_{CC5} depend on cycle rate.
- 3) I_{CC1} , I_{CC4} depend on output loading. Specified values are measured with the output open.
- 4) An initial pause of 200 μs is required after power-up followed by 8 RAS cycles, of which at least one cycle has to be a refresh cycle, before proper device operation is achieved. In case of using internal refresh counter, a minimum of 8 CAS-before-RAS initialization cycles instead of 8 RAS cycles are required.
- 5) $V_{IH}(\text{min.})$ and $V_{IL}(\text{max.})$ are reference levels for measuring timing of input signals. Transition times are also measured between V_{IH} and V_{IL} .
- 6) Measured with a load equivalent to 2 TTL loads and 100 pF.
- 7) $t_{OFF}(\text{max.})$ $t_{OEZ}(\text{max.})$ defines the time at which the output achieves the open-circuit condition and are not referenced to output voltage levels.
- 8) Either t_{RCH} or t_{RRH} must be satisfied for a read cycle.
- 9) These parameters are referenced to the CAS leading edge in early write cycles and to the WRITE leading edge in read-write cycles.
- 10) t_{WCS} , t_{RWD} , t_{CWD} and t_{AWD} are not restrictive operating parameters. They are included the data sheet as electrical characteristics only. If $t_{WCS} \geq t_{WCS}(\text{min.})$, the cycle is an early write cycle and the I/O pins will remain open-circuit (high impedance) through the entire cycle; if $t_{RWD} \geq t_{RWD}(\text{min.})$, $t_{CWD} \geq t_{CWD}(\text{min.})$ and $t_{AWD} \geq t_{AWD}(\text{min.})$ the cycles is a read-write cycle and I/O pins will contain data read from the selected cells. If neither of the above sets of conditions is satisfied, the condition of the I/O pins (at access time) is indeterminate.
- 11) Operation within the $t_{RCD}(\text{max.})$ limit insures that $t_{RAC}(\text{max.})$ can be met. $t_{RCD}(\text{max.})$ is specified as a reference point only: If t_{RCD} is greater than the specified $t_{RCD}(\text{max.})$ limit, then access time is controlled by t_{CAC} .
- 12) Operation within the $t_{RAD}(\text{max.})$ limit insures that $t_{RAC}(\text{max.})$ can be met. $t_{RAD}(\text{max.})$ is specified as a reference point only: If t_{RAD} is greater than the specified $t_{RAD}(\text{max.})$ limit, then access time is controlled by t_{AA} .
- 13) AC measurements assume $t_T = 5 \text{ ns}$.
- 14) Either t_{OZC} or t_{OZO} must be satisfied.
- 15) Either t_{COO} or t_{OOD} must be satisfied.


T-46-23-18

Waveforms

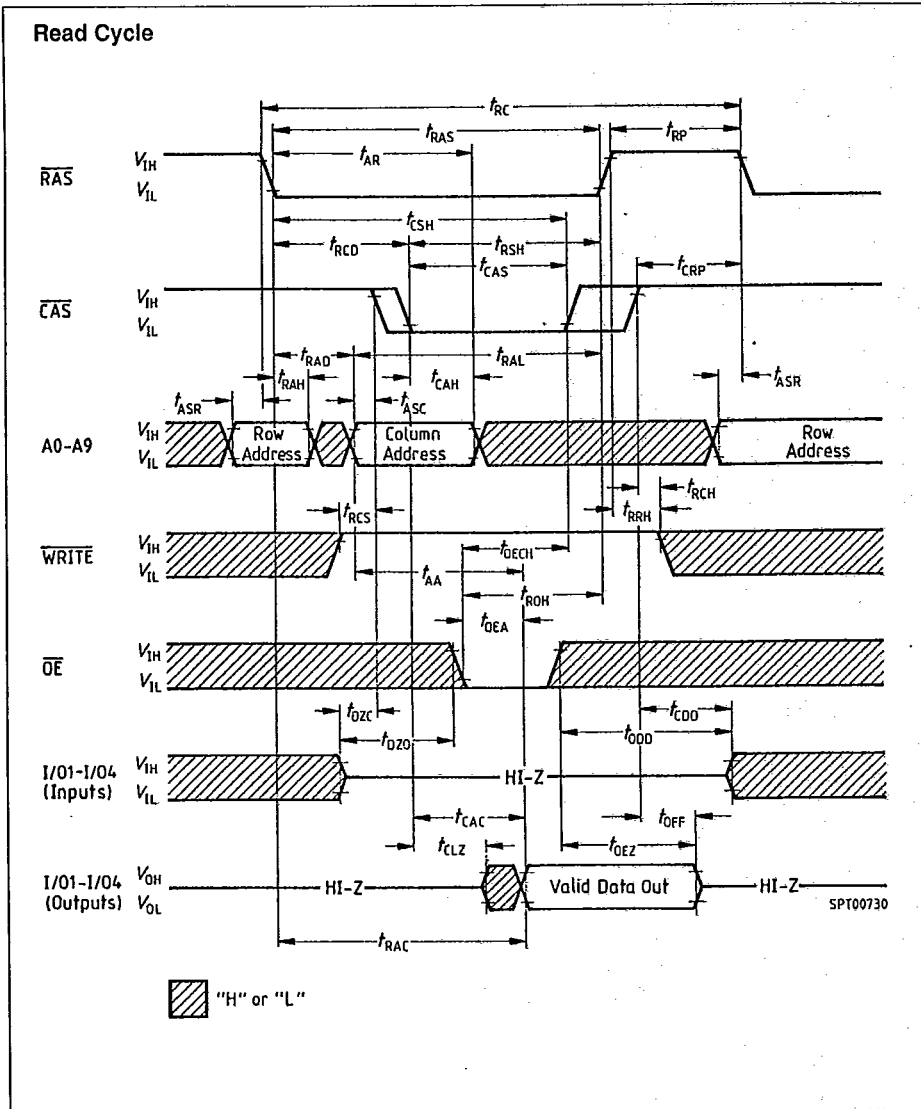

T-46-23-18


Write Cycle (Early Write)

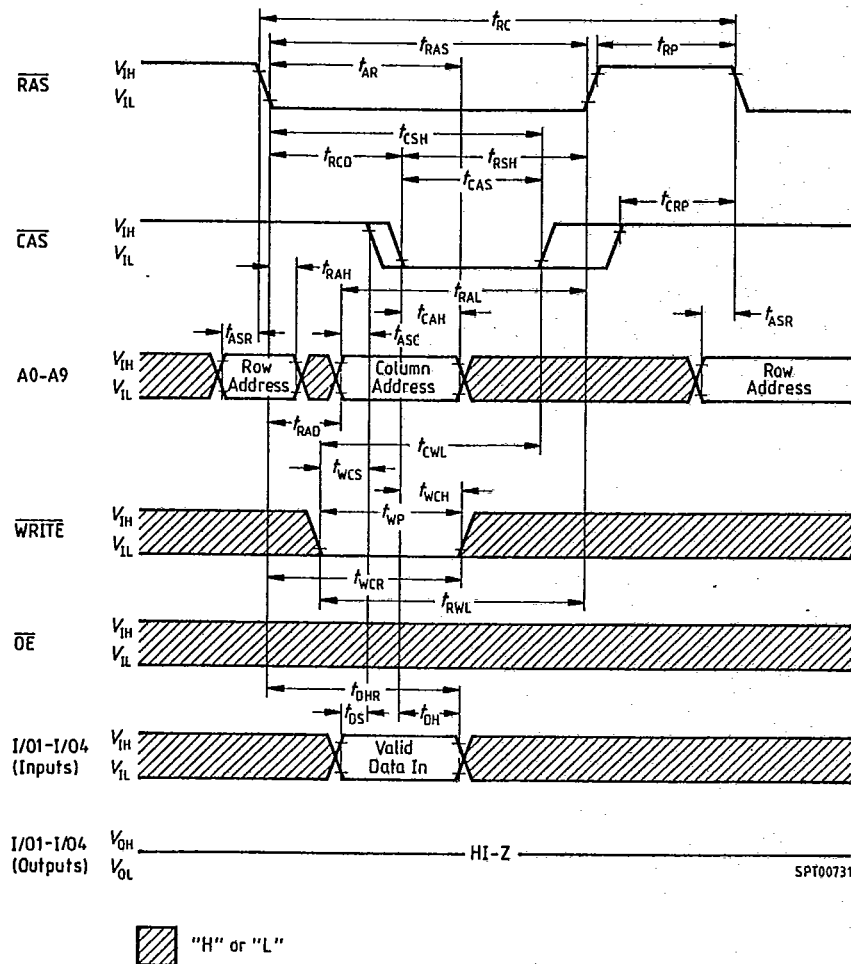

SPT00731

T-46-23-18


Write Cycle ($\overline{OE}$ Controlled Write)

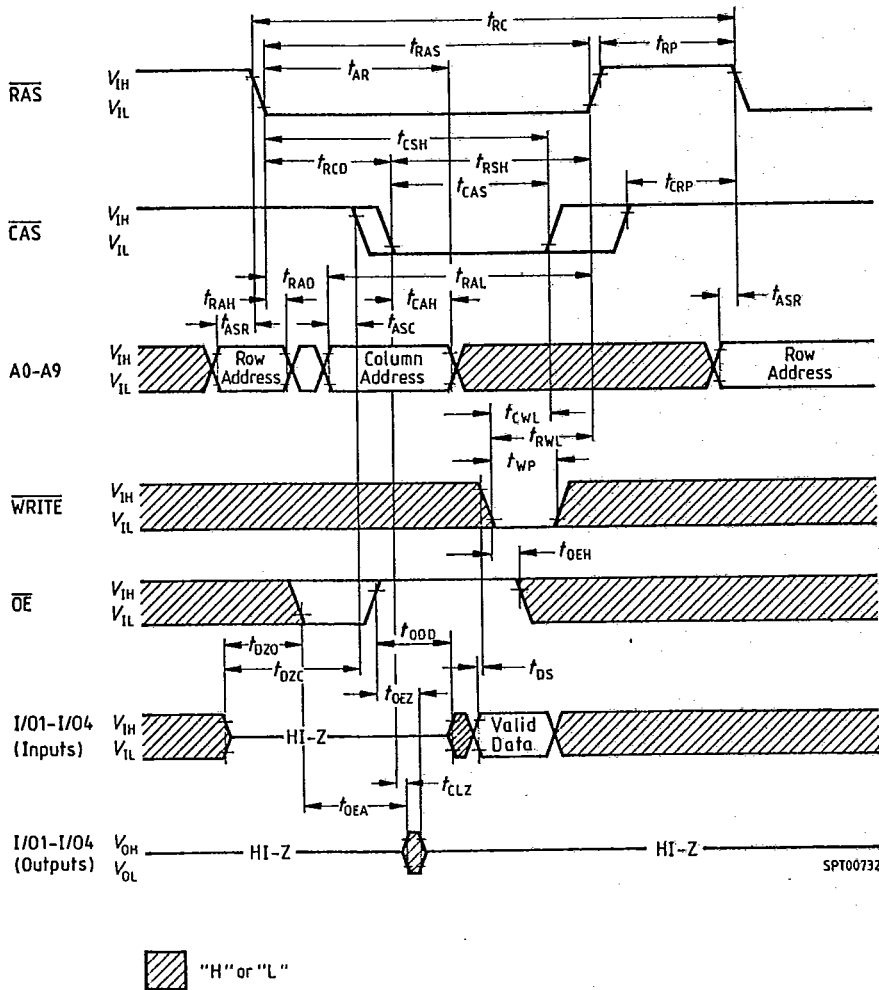

SPT00732


T-46-23-18

Read-Write (Read-Modify-Write) Cycle

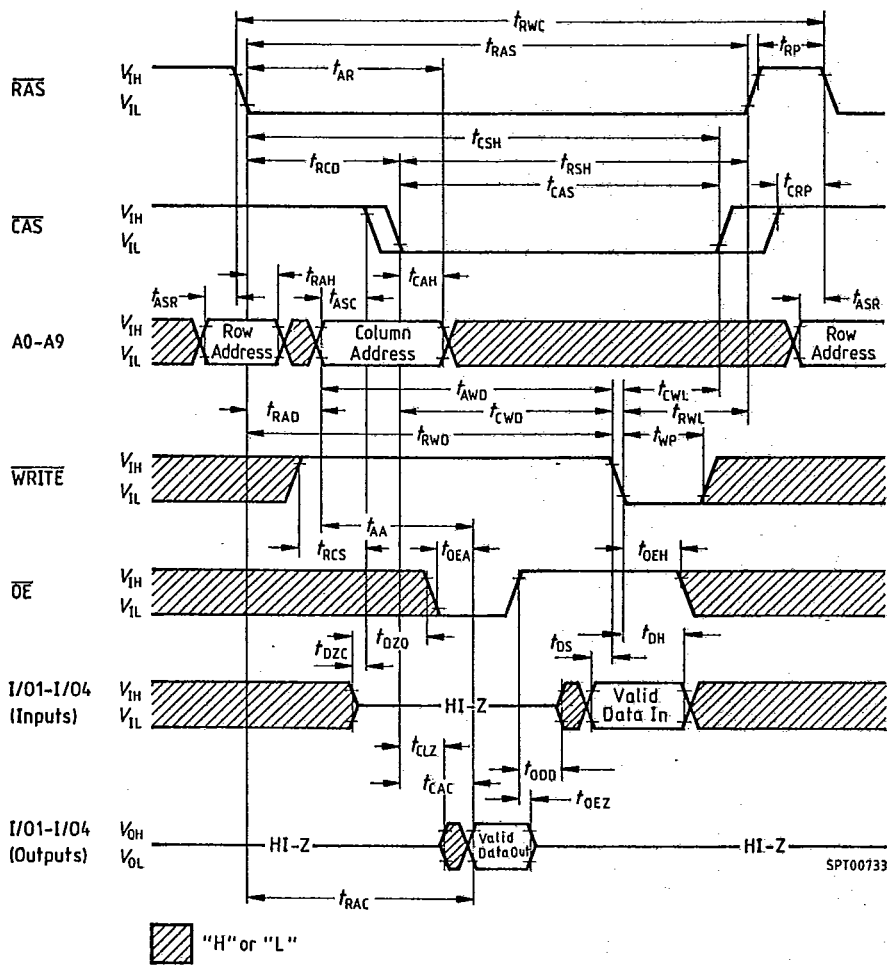

T-46-23-18

Fast Page Mode Read-Modify-Write Cycle

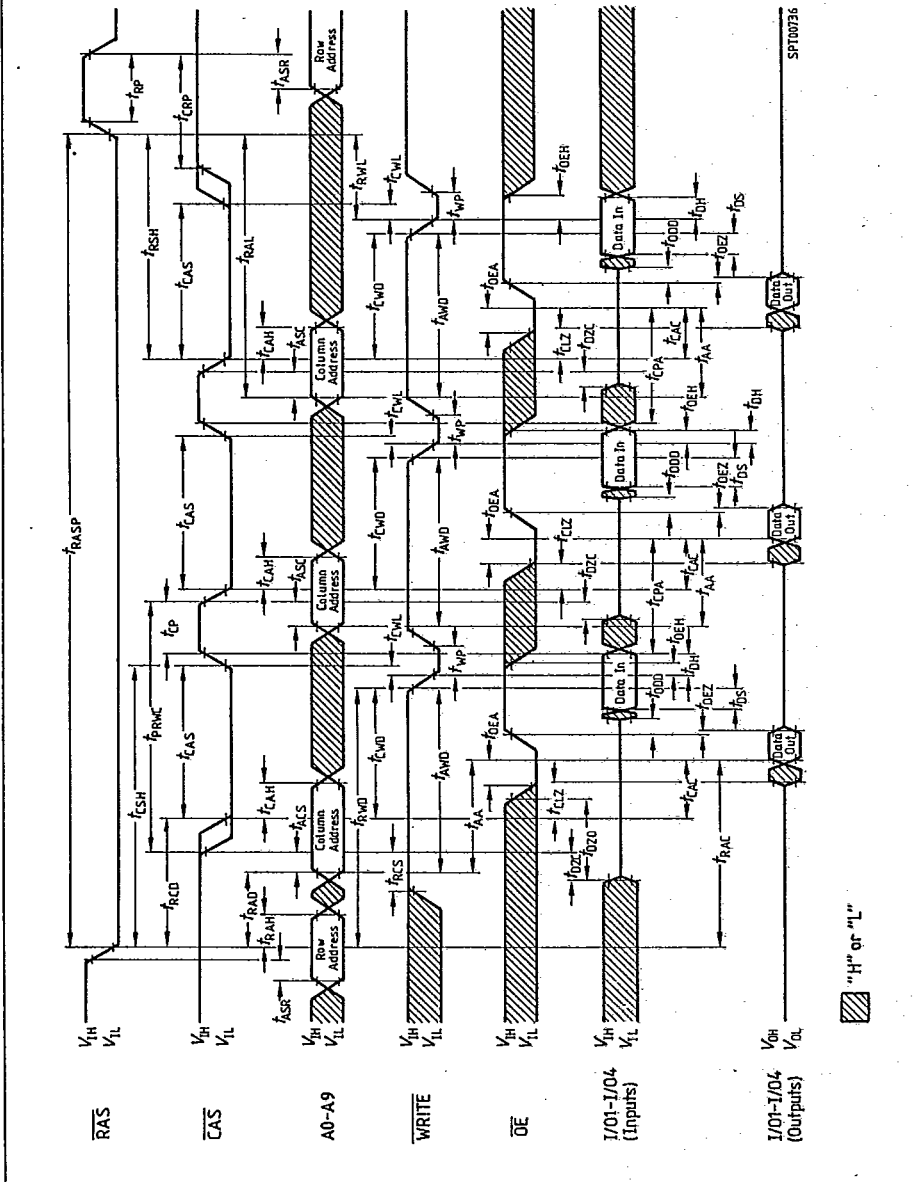


T-46-23-18




Fast Page Mode Early Write Cycle

T-46-23-18

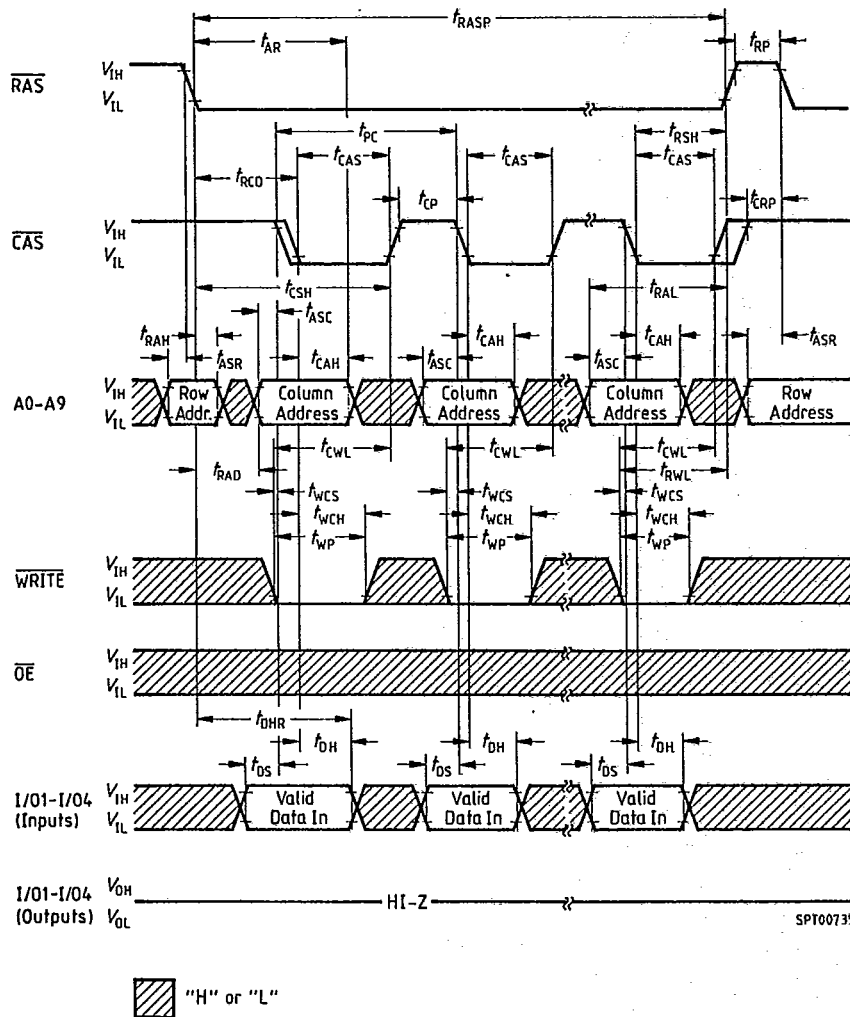


T-46-23-18

RAS-Only Refresh Cycle

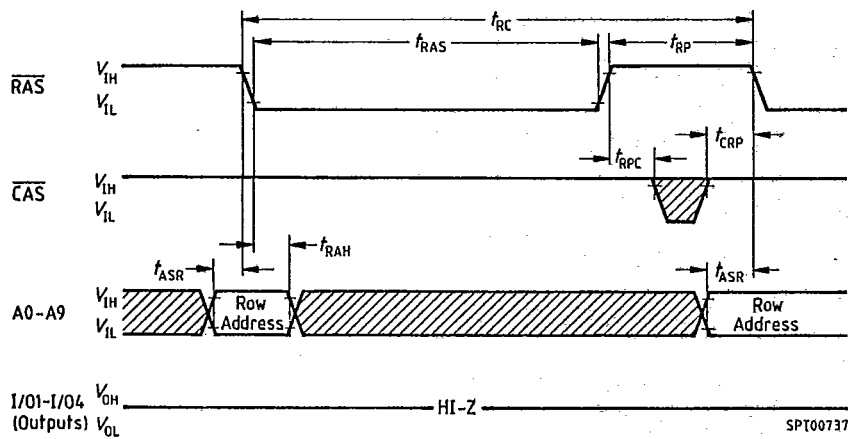

T-46-23-18


CAS-Before-RAS Refresh Cycle

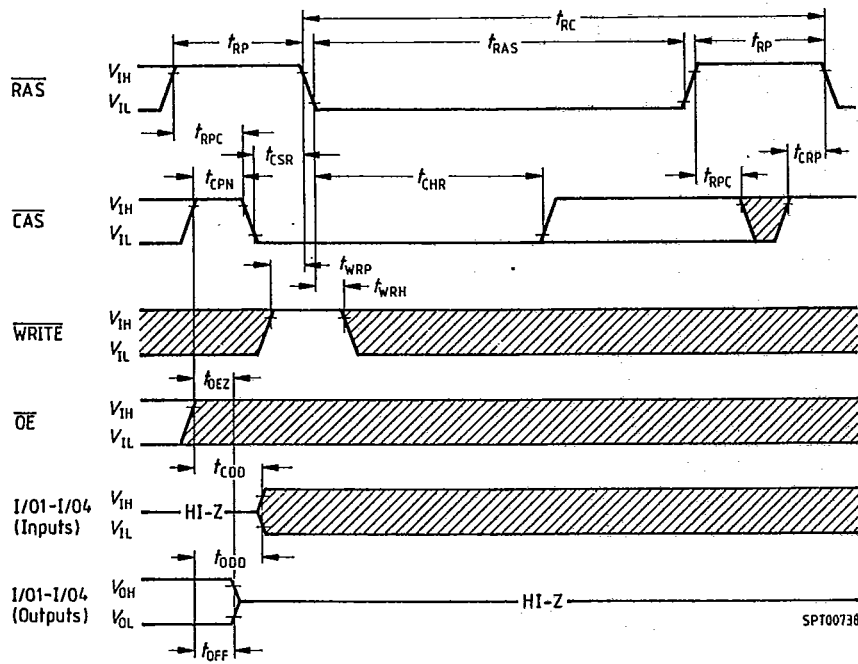

SPT00738


T-46-23-18

Hidden Refresh Cycle (Read)

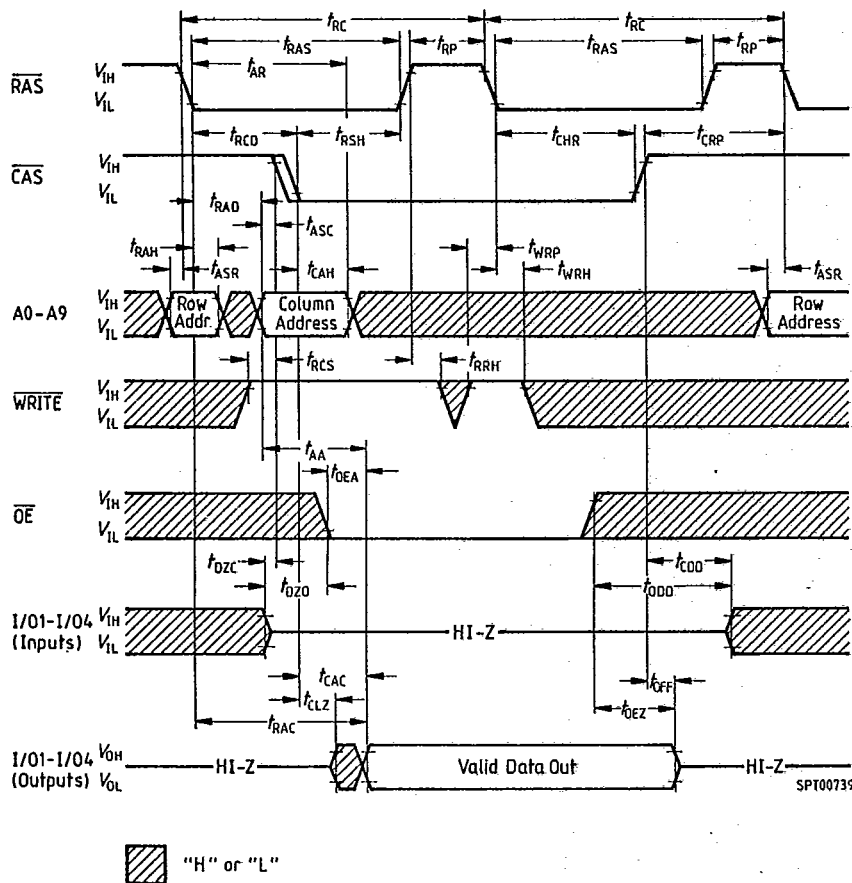

T-46-23-18


Hidden Refresh Cycle (Early Write)

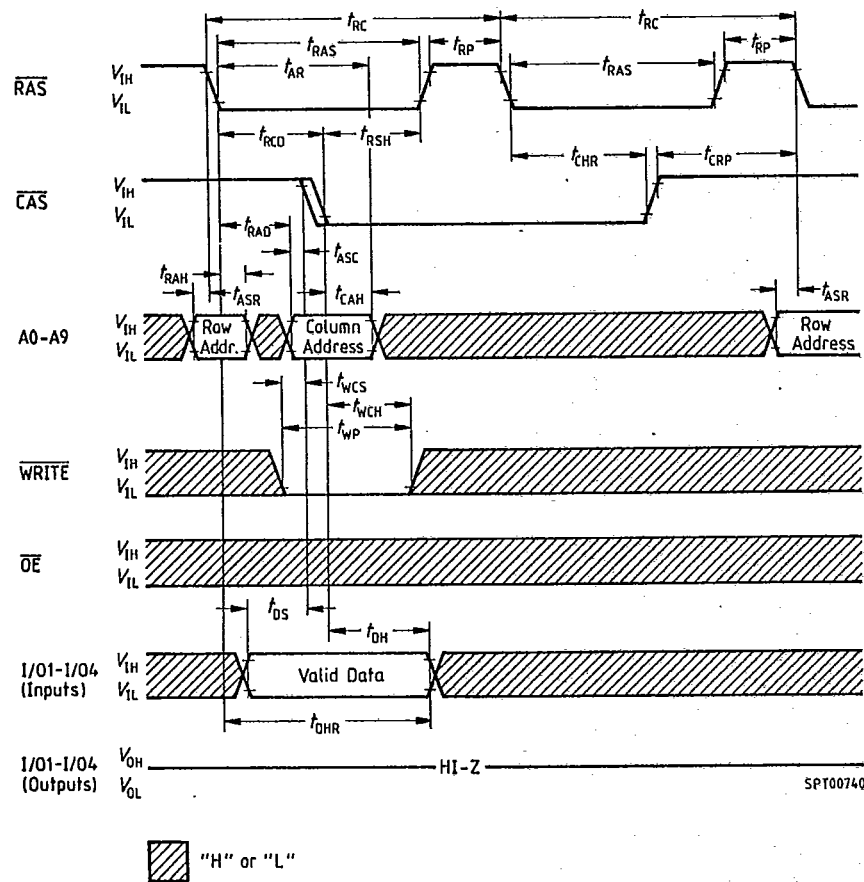

SP10274

T-46-23-18

Test Mode Entry

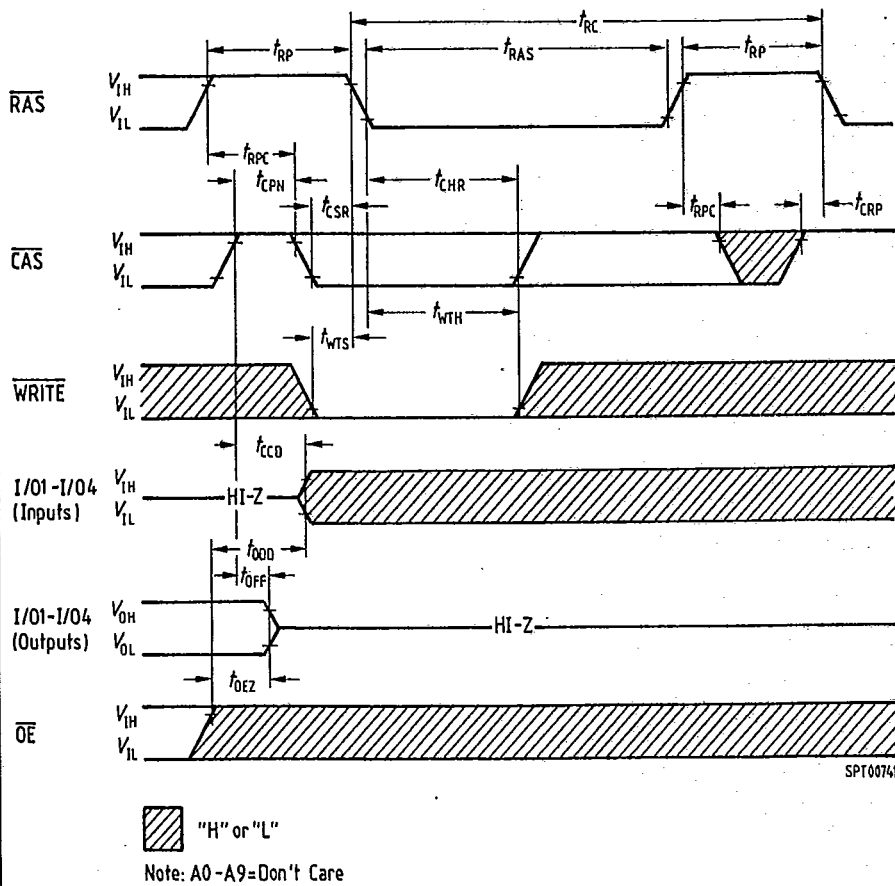


Test Mode

T-46-23-18

As the HYB 514400A is organized internally as 512 K x 8-bits, a test mode cycle using 8:1 compression can be used to improve test time. Note that in the 1M x 4 version the test time is reduced by 1/2 for a N test pattern.

In a test mode "write" the data from the I/O1 pin is written into all eight bits simultaneously (all "1" s or all "0" s). The I/O2-I/O4 inputs are not used for writing in test mode. In test mode "read" the I/O4 output is used for indicating the test mode result. If the internal eight bits are equal, I/O4 would indicate a "1". If they were not equal, I/O4 would indicate a "0". Note that in a test mode "read" I/O1-I/O3 are always driven to "1" s, i. e. all outputs will be "1" s for a test mode "pass" (see test mode block diagram). The "WRITE", $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh" cycle puts the device into test mode. To exit from test mode, a " $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh", " $\overline{\text{RAS}}$ only refresh" or "Hidden refresh" can be used. A10R, A10C and A0C are not used.

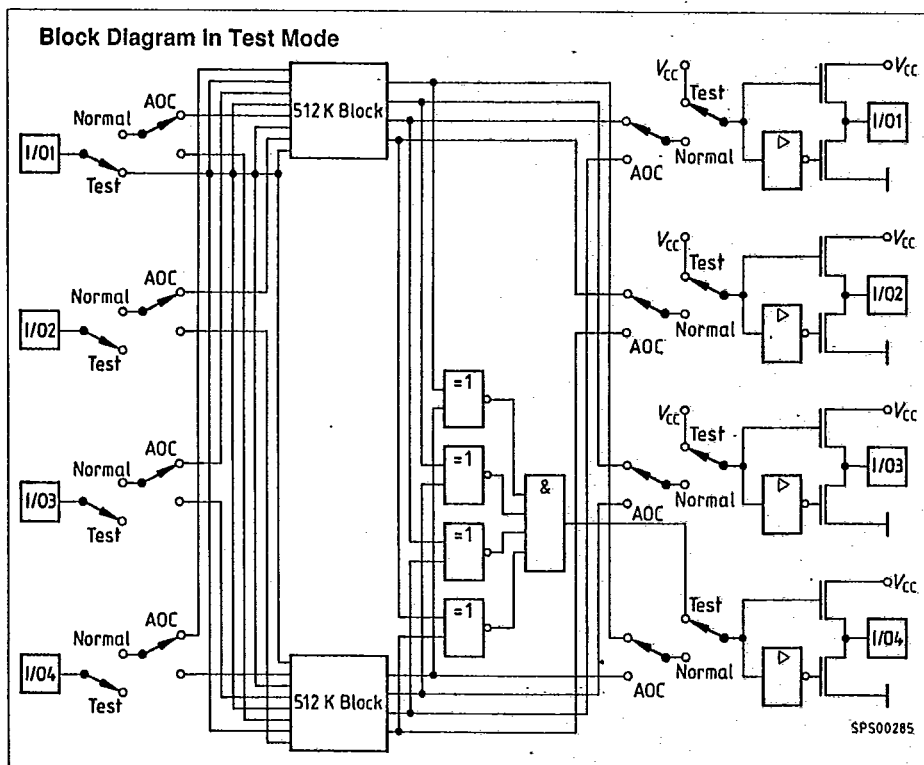


The 4M DRAM is divided into eight 512 K blocks. In test mode, information from two of the eight blocks is compared as shown in the diagram above. The 2 of 8 block selection is determined by the row addresses A8R and A9R.

Package Outlines

T-46-23-18


Plastic Package, P-SOJ-26/20 300 mil (SMD)
(Plastic small outline J-lead)

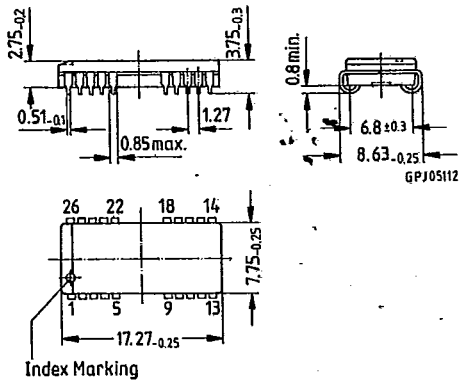

SMD=Surface Mounted Device

Dimensions in mm

Plastic Package, P-ZIP-20
(JEDEC-MO-072-AA)

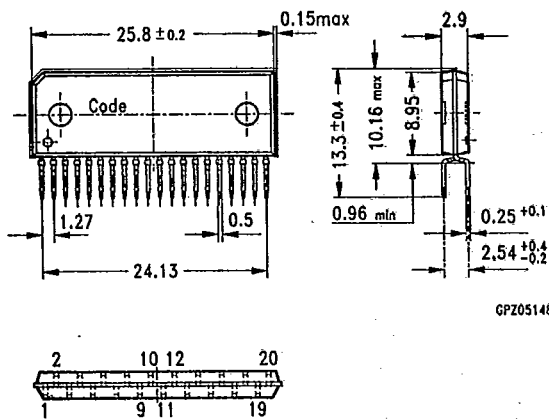

Dimensions in mm