

HM514400B/BL Series

1,048,576-word × 4-bit Dynamic Random Access Memory

The Hitachi HM514400B is a CMOS dynamic RAM organized 1,048,576 words × 4 bits. HM514400B has realized higher density, higher performance and various functions by employing 0.8 μm CMOS process technology and some new CMOS circuit design technologies. The HM514400B offers Fast Page Mode as a high speed access mode. Multiplexed address input permits the HM514400B to be packaged in standard 300-mil 20-pin plastic SOJ, standard 400-mil 20-pin plastic ZIP, 20-pin plastic TSOP I and 20-pin plastic TSOP II.

Features

- Single 5 V (±10%)
- High speed
 - Access time
60 ns/70 ns/80 ns (max)
- Low power dissipation
 - Active mode
605 mW/550 mW/495 mW (max)
 - Standby mode 11 mW (max)
0.55 mW (max) (L-version)
- Fast page mode capability
- 1024 refresh cycles : 16 ms
1024 refresh cycles : 128 ms (L-version)
- 3 variations of refresh
 - $\overline{\text{RAS}}$ -only refresh
 - CAS-before- $\overline{\text{RAS}}$ refresh
 - Hidden refresh
- Test function
- Battery back up operation
 - HM514400BL Series (L-version)


Ordering Information

Type No.	Access time	Package
HM514400BS/BLS-6	60 ns	300-mil 20-pin plastic SOJ (CP-20D)
HM514400BS/BLS-7	70 ns	
HM514400BS/BLS-8	80 ns	
HM514400BZ/BLZ-6	60 ns	400-mil 20-pin plastic ZIP (ZP-20)
HM514400BZ/BLZ-7	70 ns	
HM514400BZ/BLZ-8	80 ns	
HM514400BT/BLT-6	60 ns	20-pin plastic TSOP I (TFP-20DA)
HM514400BT/BLT-7	70 ns	
HM514400BT/BLT-8	80 ns	
HM514400BR/BLR-6	60 ns	20-pin plastic TSOP II reverse (TFP-20DAR)
HM514400BR/BLR-7	70 ns	
HM514400BR/BLR-8	80 ns	
HM514400BTT/BLTT-6	60 ns	20-pin plastic TSOP II (TTP-20D)
HM514400BTT/BLTT-7	70 ns	
HM514400BTT/BLTT-8	80 ns	
HM514400BRR/BLRR-6	60 ns	20-pin plastic TSOP II reverse (TTP-20DR)
HM514400BRR/BLRR-7	70 ns	
HM514400BRR/BLRR-8	80 ns	

HM514400B/BL Series


Pin Arrangement

HM514400BS/BLS Series

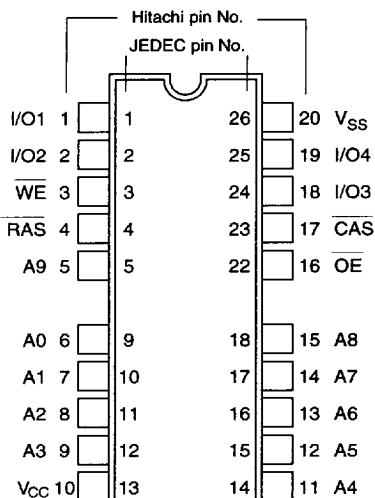


(Top view)

HM514400BZ/BLZ Series

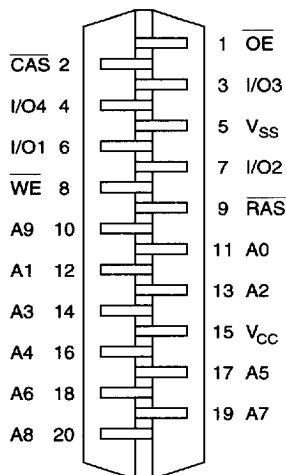


(Bottom view)

HM514400BT/BLT Series

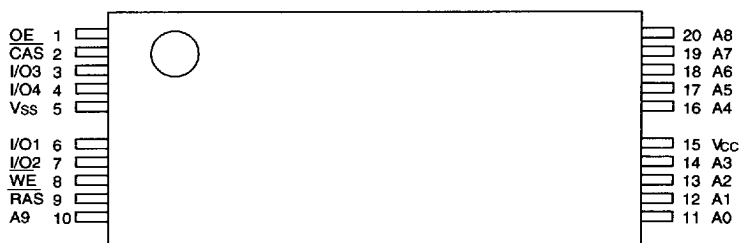


(Top view)

HM514400BR/BLR Series

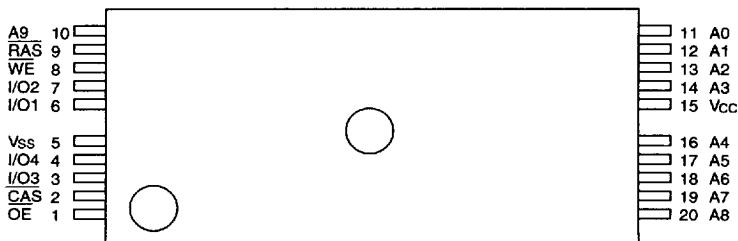

(Top view)

Pin Arrangement (cont.)

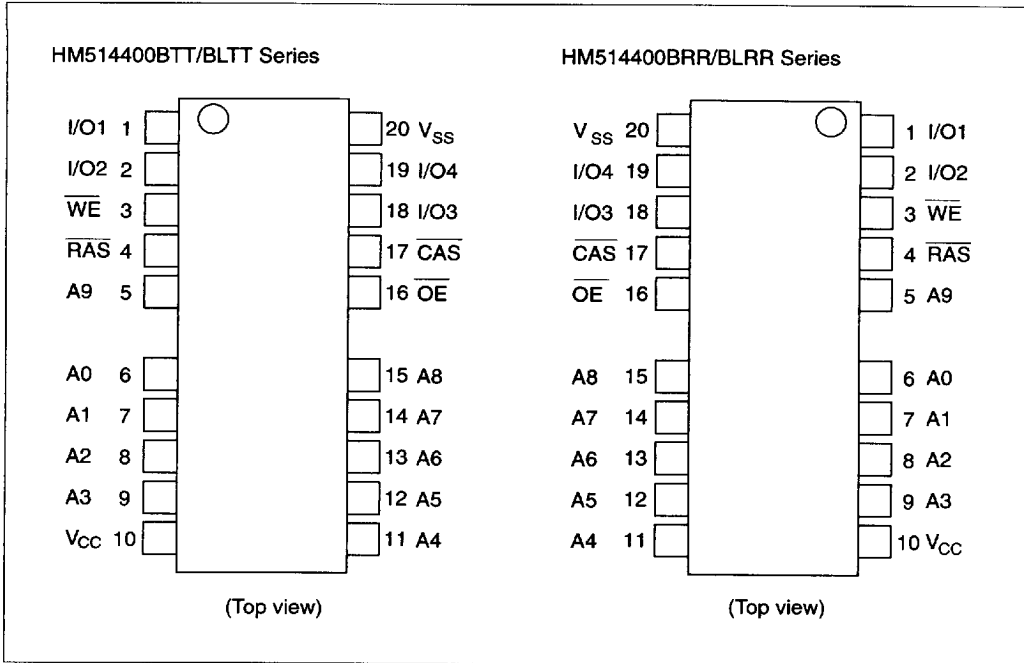


Pin Description

Pin name	Function
A0 – A9	Address input
A0 – A9	Refresh address input
I/O1 – I/O4	Data-in/Data-out
RAS	Row address strobe
CAS	Column address strobe
WE	Read/Write enable
OE	Output enable
V _{CC}	Power (+5 V)
V _{SS}	Ground

HM514400B/BL Series

Block Diagram

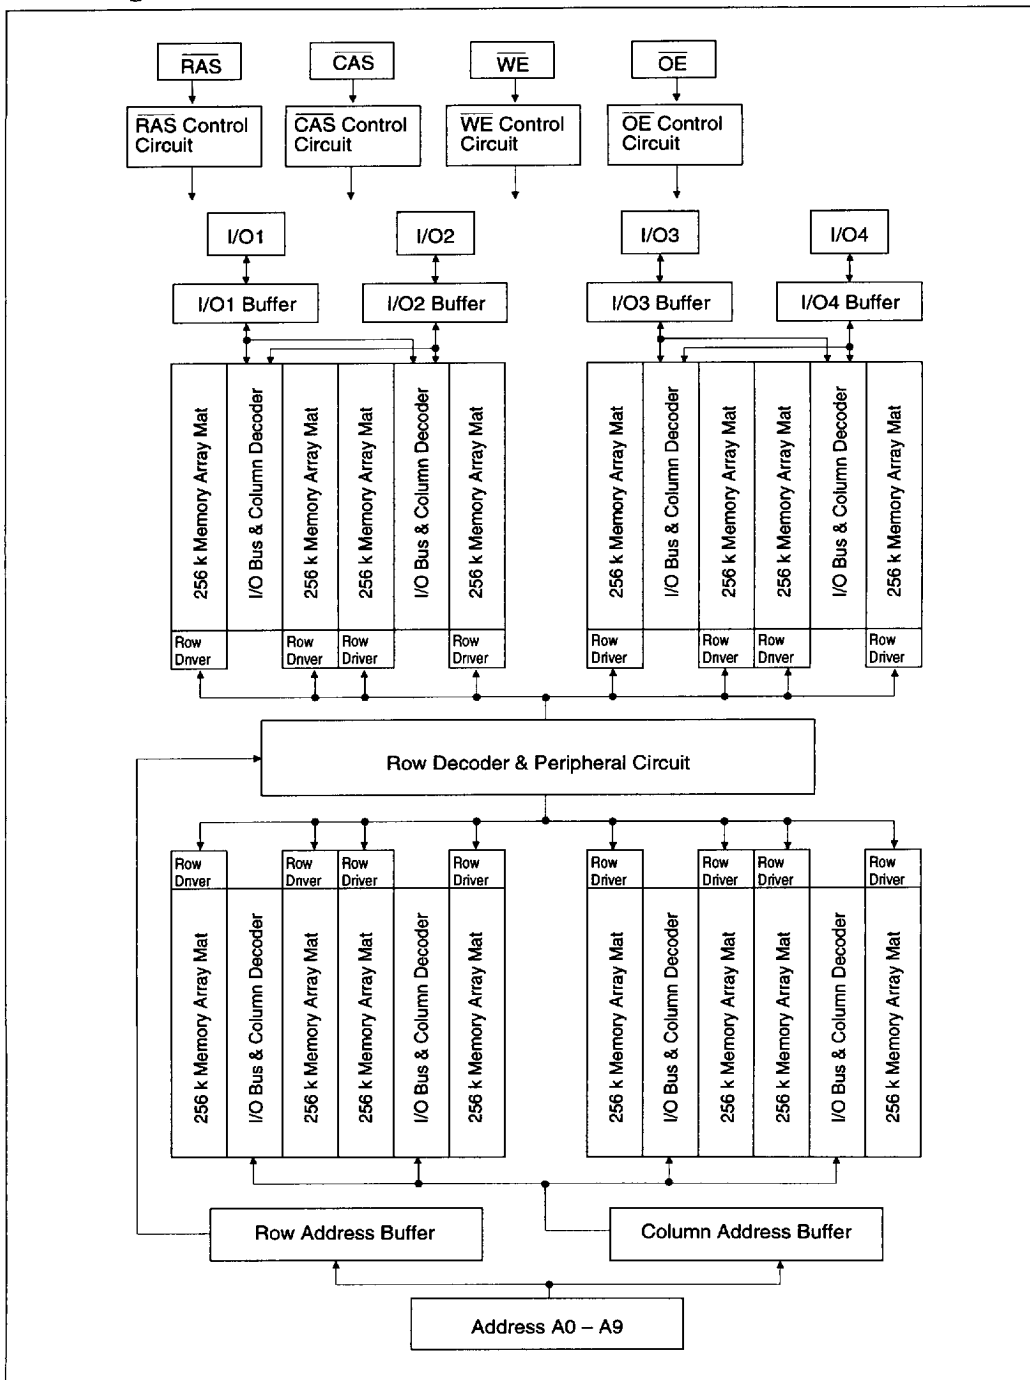

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Voltage on any pin relative to V_{SS}	V_T	-1.0 to +7.0	V
Supply voltage relative to V_{SS}	V_{CC}	-1.0 to +7.0	V
Short circuit output current	I_{out}	50	mA
Power dissipation	P_T	1.0	W
Operating temperature	T_{opr}	0 to +70	°C
Storage temperature	T_{stg}	-55 to +125	°C

Recommended DC Operating Conditions ($T_a = 0$ to $+70^{\circ}\text{C}$)

Parameter	Symbol	Min	Typ	Max	Unit	Note
Supply voltage	V_{SS}	0	0	0	V	
	V_{CC}	4.5	5.0	5.5	V	1
Input high voltage	V_{IH}	2.4	—	6.5	V	1
Input low voltage	V_{IL}	-1.0	—	0.8	V	1

Note : 1. All voltage referred to V_{SS} .

HM514400B/BL Series

DC Characteristics (Ta = 0 to +70°C, V_{CC} = 5 V ± 10%, V_{SS} = 0 V)

Parameter	Symbol	HM514400 B/BL-6		HM514400 B/BL-7		HM514400 B/BL-8		Unit	Test condition	Notes
		Min	Max	Min	Max	Min	Max			
Operating current	I _{CC1}	—	110	—	100	—	90	mA	RAS, CAS cycling t _{RC} = min	1, 2
Standby current	I _{CC2}	—	2	—	2	—	2	mA	TTL interface RAS, CAS = V _{IH} Dout = High-Z	
		—	1	—	1	—	1	mA	CMOS interface RAS, CAS ≥ V _{CC} - 0.2 V Dout = High-Z	
Standby current (L-version)		—	100	—	100	—	100	μA	CMOS interface RAS, CAS = V _{IH} WE, OE, Address, Din = V _{IH} or V _{IL} Dout = High-Z	4
RAS-only refresh current	I _{CC3}	—	110	—	100	—	90	mA	t _{RC} = min	2
Standby current	I _{CC5}	—	5	—	5	—	5	mA	RAS = V _{IH} CAS = V _{IL} Dout = enable	1
CAS-before-RAS refresh current	I _{CC6}	—	110	—	100	—	90	mA	t _{RC} = min	
Fast page mode current	I _{CC7}	—	110	—	100	—	90	mA	t _{PC} = min	1, 3
Battery back up operating current (Standby with CBR refresh) (L-version)	I _{CC10}	—	200	—	200	—	200	μA	t _{RC} = 125 μs t _{RAS} ≤ 1 μs WE = V _{IH} , CAS = V _{IL} OE, Address, Din = V _{IH} or V _{IL} Dout = High-Z	4
Input leakage current	I _{LI}	-10	10	-10	10	-10	10	μA	0 V ≤ Vin ≤ 7 V	
Output leakage current	I _{LO}	-10	10	-10	10	-10	10	μA	0 V ≤ Vout ≤ 7 V Dout = disable	
Output high voltage	V _{OH}	2.4	V _{CC}	2.4	V _{CC}	2.4	V _{CC}	V	High Iout = -5 mA	
Output low voltage	V _{OL}	0	0.4	0	0.4	0	0.4	V	Low Iout = 4.2 mA	

4496203 0026317 888

- Notes : 1. I_{CC} depends on output load condition when the device is selected. I_{CC} max is specified at the output open condition.
2. Address can be changed twice or less while $\overline{RAS} = V_{IL}$.
3. Address can be changed once or less while $\overline{CAS} = V_{IH}$.
4. $V_{CC} - 0.2 \text{ V} \leq V_{IH} \leq 6.5 \text{ V}$ and $0 \text{ V} \leq V_{IL} \leq 0.2 \text{ V}$

Capacitance ($T_a = 25^\circ\text{C}$, $V_{CC} = 5 \text{ V} \pm 10\%$)

Parameter	Symbol	Typ	Max	Unit	Notes
Input capacitance (Address)	C_{I1}	—	5	pF	1
Input capacitance (Clocks)	C_{I2}	—	7	pF	1
Output capacitance (Data-in, Data-out)	$C_{I/O}$	—	7	pF	1, 2

- Notes : 1. Capacitance measured with Boonton Meter or effective capacitance measuring method.
2. $\overline{CAS} = V_{IH}$ to disable Dout.

HM514400B/BL Series

AC Characteristics ($T_a = 0$ to $+70^\circ\text{C}$, $V_{CC} = 5\text{ V} \pm 10\%$, $V_{SS} = 0\text{ V}$) *1, *14, *15, *16

Test Conditions

Input rise and fall times : 5 ns

Input timing reference levels : 0.8 V, 2.4 V

Output load : 2 TTL gate + C_L (100 pF)

(Including scope and jig)

Read, Write, Read-Modify-Write and Refresh Cycles (Common parameters)

Parameter	Symbol	HM514400 B/BL-6		HM514400 B/BL-7		HM514400 B/BL-8		Unit	Notes
		Min	Max	Min	Max	Min	Max		
Random read or write cycle time	t_{RC}	110	—	130	—	150	—	ns	
RAS precharge time	t_{RP}	40	—	50	—	60	—	ns	
RAS pulse width	t_{RAS}	60	10000	70	10000	80	10000	ns	19
CAS pulse width	t_{CAS}	15	10000	20	10000	20	10000	ns	20
Row address setup time	t_{ASR}	0	—	0	—	0	—	ns	
Row address hold time	t_{RAH}	10	—	10	—	10	—	ns	
Column address setup time	t_{ASC}	0	—	0	—	0	—	ns	
Column address hold time	t_{CAH}	15	—	15	—	15	—	ns	
RAS to CAS delay time	t_{RCD}	20	45	20	50	20	60	ns	8
RAS to column address delay time	t_{RAD}	15	30	15	35	15	40	ns	9
RAS hold time	t_{RSH}	15	—	20	—	20	—	ns	
CAS hold time	t_{CSH}	60	—	70	—	80	—	ns	
CAS to RAS precharge time	t_{CRP}	10	—	10	—	10	—	ns	
OE to Din delay time	t_{ODD}	15	—	20	—	20	—	ns	
OE delay time from Din	t_{DZO}	0	—	0	—	0	—	ns	
CAS setup time from Din	t_{DZC}	0	—	0	—	0	—	ns	
Transition time (rise and fall)	t_T	3	50	3	50	3	50	ns	7
Refresh period	t_{REF}	—	16	—	16	—	16	ms	
Refresh period (L-version)	t_{REF}	—	128	—	128	—	128	ms	

Read cycle

Parameter	Symbol	HM514400 B/BL-6		HM514400 B/BL-7		HM514400 B/BL-8		Unit	Notes
		Min	Max	Min	Max	Min	Max		
Access time from $\overline{\text{RAS}}$	t_{RAC}	—	60	—	70	—	80	ns	2, 3, 17
Access time from $\overline{\text{CAS}}$	t_{CAC}	—	15	—	20	—	20	ns	3, 4, 13, 17
Access time from address	t_{AA}	—	30	—	35	—	40	ns	3, 5, 13, 17
Access time from $\overline{\text{OE}}$	t_{OAC}	—	15	—	20	—	20	ns	3, 17
Read command setup time	t_{RCS}	0	—	0	—	0	—	ns	
Read command hold time to $\overline{\text{CAS}}$	t_{RCH}	0	—	0	—	0	—	ns	18
Read command hold time to $\overline{\text{RAS}}$	t_{RRH}	0	—	0	—	0	—	ns	18
Column address to $\overline{\text{RAS}}$ lead time	t_{RAE}	30	—	35	—	40	—	ns	
Output buffer turn-off time	t_{OFF1}	0	15	0	20	0	20	ns	6
Output buffer turn-off time to $\overline{\text{OE}}$	t_{OFF2}	0	15	0	20	0	20	ns	6
$\overline{\text{CAS}}$ to Din delay time	t_{CDD}	15	—	20	—	20	—	ns	
$\overline{\text{OE}}$ pulse width	t_{OEP}	15	—	20	—	20	—	ns	

Write cycle

Parameter	Symbol	HM514400 B/BL-6		HM514400 B/BL-7		HM514400 B/BL-8		Unit	Notes
		Min	Max	Min	Max	Min	Max		
Write command setup time	t_{WCS}	0	—	0	—	0	—	ns	10
Write command hold time	t_{WCH}	15	—	15	—	15	—	ns	
Write command pulse width	t_{WP}	10	—	10	—	10	—	ns	
Write command to $\overline{\text{RAS}}$ lead time	t_{RWL}	15	—	20	—	20	—	ns	
Write command to $\overline{\text{CAS}}$ lead time	t_{CWL}	15	—	20	—	20	—	ns	
Data-in setup time	t_{DS}	0	—	0	—	0	—	ns	11
Data-in hold time	t_{DH}	15	—	15	—	15	—	ns	11

HM514400B/BL Series

Read-modify-write cycle

Parameter	Symbol	HM514400 B/BL-6		HM514400 B/BL-7		HM514400 B/BL-8		Unit	Notes
		Min	Max	Min	Max	Min	Max		
Read-modify-write cycle time	t_{RWC}	150	—	180	—	200	—	ns	
$\overline{RAS}$ to $\overline{WE}$ delay time	t_{RWD}	80	—	95	—	105	—	ns	10
$\overline{CAS}$ to $\overline{WE}$ delay time	t_{CWD}	35	—	45	—	45	—	ns	10
Column address to $\overline{WE}$ delay time	t_{AWD}	50	—	60	—	65	—	ns	10
$\overline{OE}$ hold time from $\overline{WE}$	t_{OEh}	15	—	20	—	20	—	ns	

Refresh cycle

Parameter	Symbol	HM514400 B/BL-6		HM514400 B/BL-7		HM514400 B/BL-8		Unit	Notes
		Min	Max	Min	Max	Min	Max		
$\overline{CAS}$ setup time (CBR refresh cycle)	t_{CSR}	10	—	10	—	10	—	ns	
$\overline{CAS}$ hold time (CBR refresh cycle)	t_{CHR}	10	—	10	—	10	—	ns	
$\overline{RAS}$ precharge to $\overline{CAS}$ hold time	t_{RPC}	10	—	10	—	10	—	ns	
$\overline{CAS}$ precharge time in normal mode	t_{CPN}	10	—	10	—	10	—	ns	

Fast page mode cycle

Parameter	Symbol	HM514400 B/BL-6		HM514400 B/BL-7		HM514400 B/BL-8		Unit	Notes
		Min	Max	Min	Max	Min	Max		
Fast page mode cycle time	t_{PC}	40	—	45	—	50	—	ns	
Fast page mode $\overline{CAS}$ precharge time	t_{CP}	10	—	10	—	10	—	ns	
Fast page mode $\overline{RAS}$ pulse width	t_{RASC}	—	100000	—	100000	—	100000	ns	12
Access time from $\overline{CAS}$ precharge	t_{ACP}	—	35	—	40	—	45	ns	3, 13, 17
$\overline{RAS}$ hold time from $\overline{CAS}$ precharge	t_{RHCP}	35	—	40	—	45	—	ns	

■ 4496203 0026321 209 ■

Fast page mode Read-modify-write Cycle

Parameter	Symbol	HM514400 B/BL-6		HM514400 B/BL-7		HM514400 B/BL-8		Unit	Notes
		Min	Max	Min	Max	Min	Max		
Fast page mode read-modify-write cycle time	t_{PCM}	80	—	95	—	100	—	ns	
Fast page mode read-modify-write cycle $\overline{CAS}$ precharge to $\overline{WE}$ delay time	t_{CPW}	55	—	65	—	70	—	ns	10

Test mode cycle

Parameter	Symbol	HM514400 B/BL-6		HM514400 B/BL-7		HM514400 B/BL-8		Unit	Notes
		Min	Max	Min	Max	Min	Max		
Test mode $\overline{WE}$ setup time	t_{WS}	0	—	0	—	0	—	ns	
Test mode $\overline{WE}$ hold time	t_{WH}	10	—	10	—	10	—	ns	


Counter test cycle

Parameter	Symbol	HM514400 B/BL-6		HM514400 B/BL-7		HM514400 B/BL-8		Unit	Notes
		Min	Max	Min	Max	Min	Max		
$\overline{CAS}$ precharge time in counter test cycle	t_{CPT}	40	—	40	—	40	—	ns	

- Notes:
1. AC measurements assume $t_T = 5 \text{ ns}$.
 2. Assumes that $t_{RCD} \leq t_{RCD}(\text{max})$ and $t_{RAD} \leq t_{RAD}(\text{max})$. If t_{RCD} or t_{RAD} is greater than the maximum recommended value shown in this table, t_{RAC} exceeds the value shown.
 3. Measured with a load circuit equivalent to 2 TTL loads and 100 pF.
 4. Assumes that $t_{RCD} \geq t_{RCD}(\text{max})$ and $t_{RAD} \leq t_{RAD}(\text{max})$.
 5. Assumes that $t_{RCD} \leq t_{RCD}(\text{max})$ and $t_{RAD} \geq t_{RAD}(\text{max})$.
 6. $t_{OFF}(\text{max})$ defines the time at which the output achieves the open circuit condition and is not referred to output voltage levels.
 7. $V_{IH}(\text{min})$ and $V_{IL}(\text{max})$ are reference levels for measuring timing of input signals. Also, transition times are measured between V_{IH} and V_{IL} .
 8. Operation with the $t_{RCD}(\text{max})$ limit insures that $t_{RAC}(\text{max})$ can be met, $t_{RCD}(\text{max})$ is specified as a reference point only, if t_{RCD} is greater than the specified $t_{RCD}(\text{max})$ limit, then access time is controlled exclusively by t_{CAC} .
 9. Operation with the $t_{RAD}(\text{max})$ limit insures that $t_{RAC}(\text{max})$ can be met, $t_{RAD}(\text{max})$ is specified as a reference point only, if t_{RAD} is greater than the specified $t_{RAD}(\text{max})$ limit, then access time is controlled exclusively by t_{AA} .
 10. t_{WCS} , t_{RWD} , t_{CWD} , t_{CPW} and t_{AWD} are not restrictive operating parameters. They are included in the data sheet as electrical characteristics only; if $t_{WCS} \geq t_{WCS}(\text{min})$, the cycle is an early write cycle and the data out pin will remain open circuit (high impedance) throughout the entire cycle; if $t_{RWD} \geq t_{RWD}(\text{min})$, $t_{CWD} \geq t_{CWD}(\text{min})$, $t_{CPW} \geq t_{CPW}(\text{min})$ and $t_{AWD} \geq t_{AWD}(\text{min})$, the cycle is a read-modify-write and the data output will contain data read from the selected cell; if neither of the above sets of conditions is satisfied, the condition of the data out (at access time) is indeterminate.
 11. These parameters are referred to $\overline{\text{CAS}}$ leading edge in an early write cycle and to $\overline{\text{WE}}$ leading edge in a delayed write or read-modify-write cycle.
 12. t_{RASC} defines $\overline{\text{RAS}}$ pulse width in fast page mode cycles.
 13. Access time is determined by the longer of t_{AA} or t_{CAC} or t_{ACP} .
 14. An initial pause of 100 μs is required after power up followed by a minimum of eight initialization cycles ($\overline{\text{RAS}}$ -only refresh cycle or $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh cycle). If the internal refresh counter is used, a minimum of eight $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh cycles is required.
 15. In delayed write or read-modify-write cycles, $\overline{\text{OE}}$ must disable output buffer prior to applying data to the device.
 16. Test mode operation specified in this data sheet is 2-bit test function controlled by control address bits - - - CA0. This test mode operation can be performed by $\overline{\text{WE}}$ -and- $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ (WCBR) refresh cycle. Refresh during test mode operation will be performed by normal read cycles or by WCBR refresh cycles. When the state of two test bits accord each other, the condition of the output data is high level. When the state of test bits do not accord, the condition of the output data is low level. In order to end this test mode operation, perform a $\overline{\text{RAS}}$ -only refresh cycle or a $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh cycle.
 17. In a test mode read cycle, the value of t_{RAC} , t_{AA} , t_{CAC} , t_{OAC} and t_{ACP} is delayed for 2 ns to 5 ns for the specified value. These parameters should be specified in test mode cycles by adding the above value to the specified value in this data sheet.
 18. Either t_{RCH} or t_{RRH} must be satisfied
 19. $t_{RAS}(\text{min}) = t_{RWD}(\text{min}) + t_{RWL}(\text{min}) + t_T$ in read-modify-write cycle.
 20. $t_{CAS}(\text{min}) = t_{CWD}(\text{min}) + t_{CWL}(\text{min}) + t_T$ in read-modify-write cycle.

Timing Waveforms *21

Read Cycle

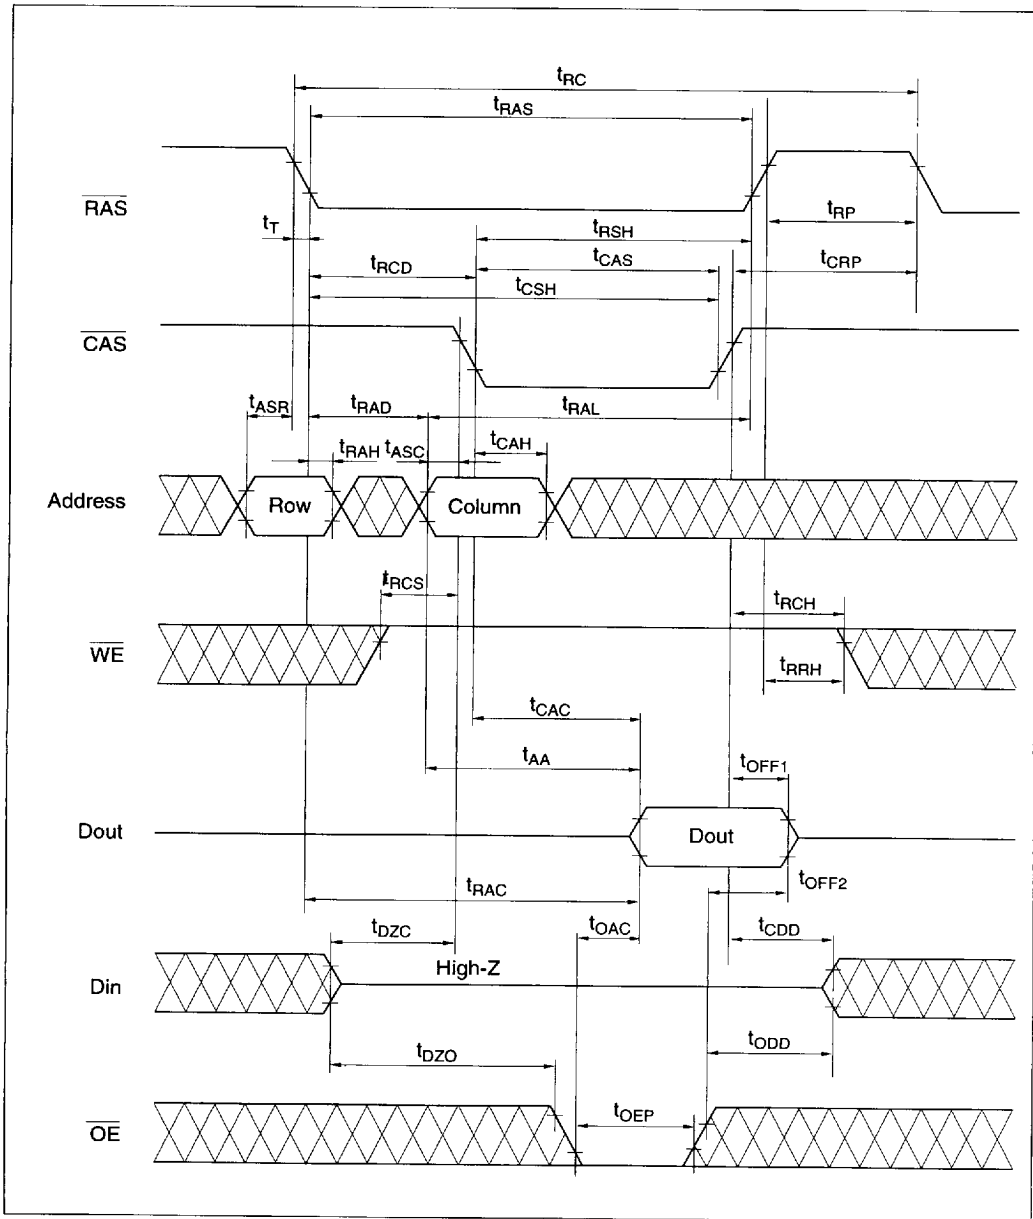


Notes: 21.  : H or L (H : $V_{\text{IH}}(\text{min}) \leq V_{\text{IN}} \leq V_{\text{IH}}(\text{max})$, L : $V_{\text{IL}}(\text{min}) \leq V_{\text{IN}} \leq V_{\text{IL}}(\text{max})$)


 : Invalid Dout

HM514400B/BL Series

Early Write Cycle

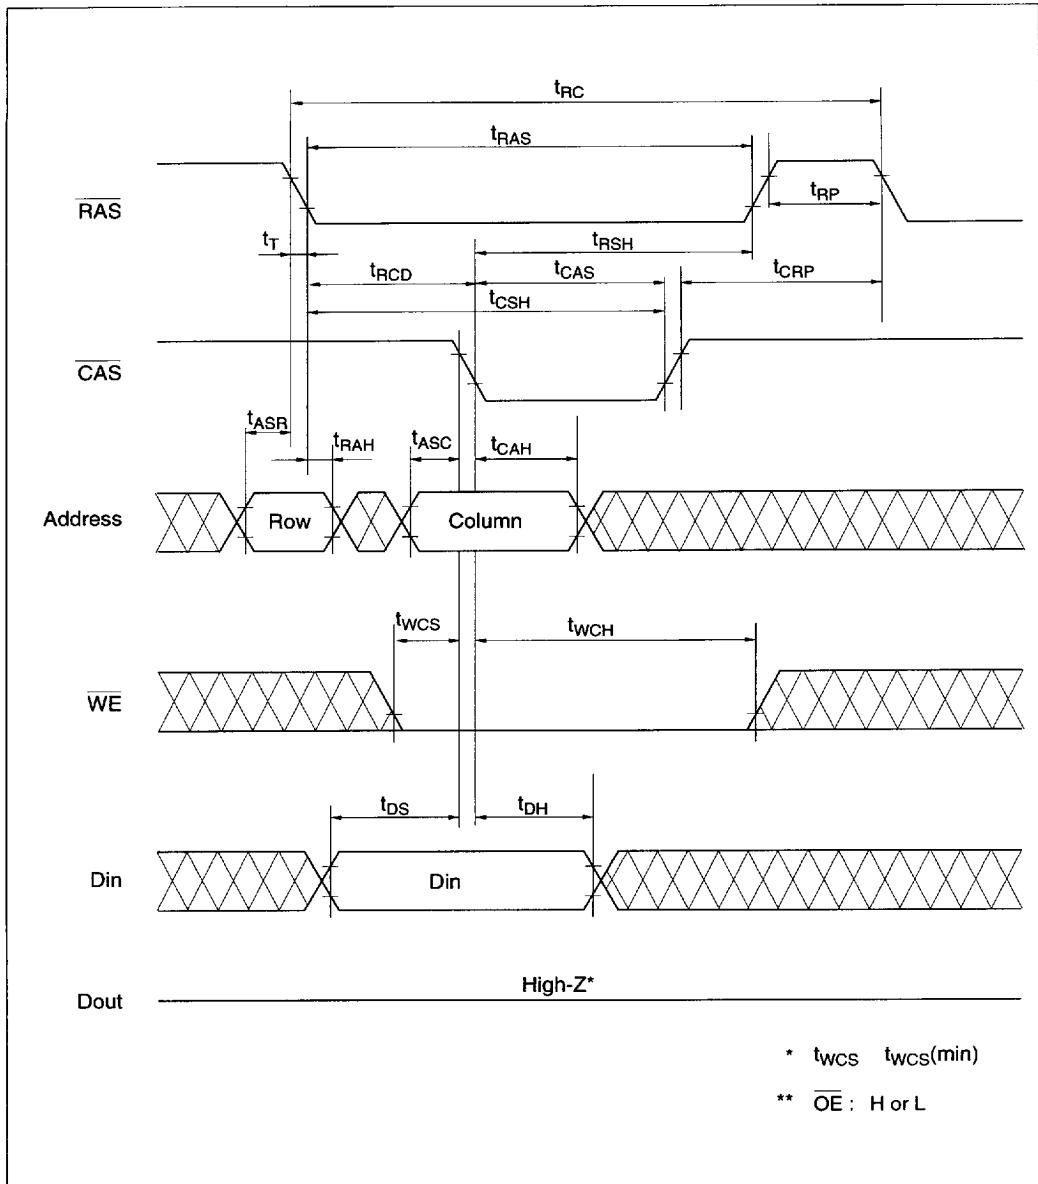

Delayed Write Cycle

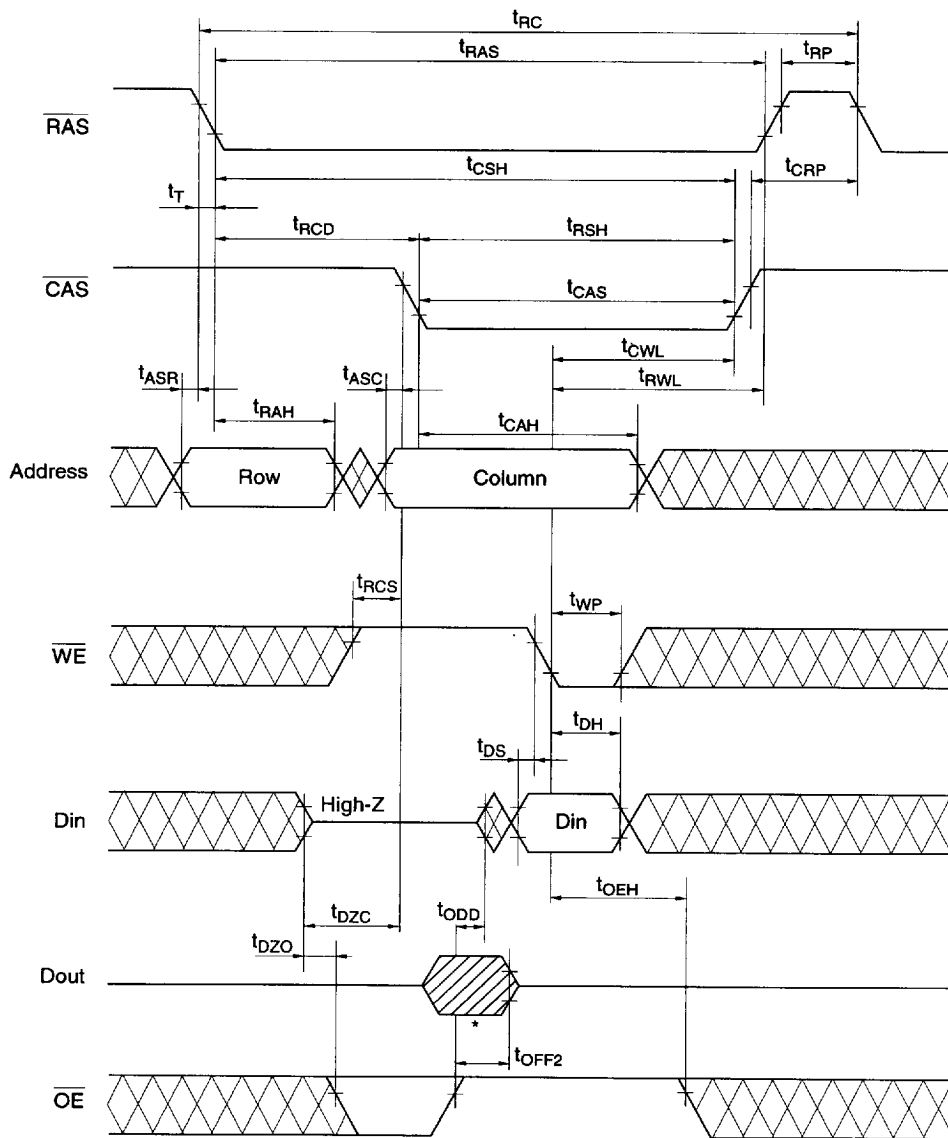


* Invalid Dout comes out, when $\overline{\text{OE}}$ is low level.

Read-Modify-Write Cycle




4496203 0026327 727

CAS-Before-RAS Refresh Cycle

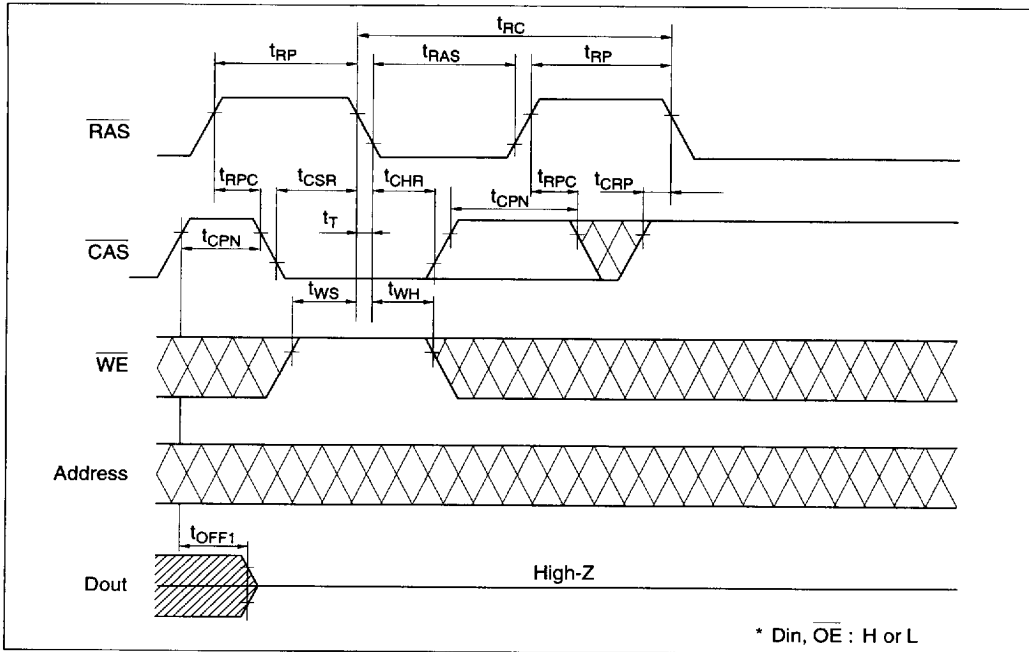



RAS-Only Refresh Cycle

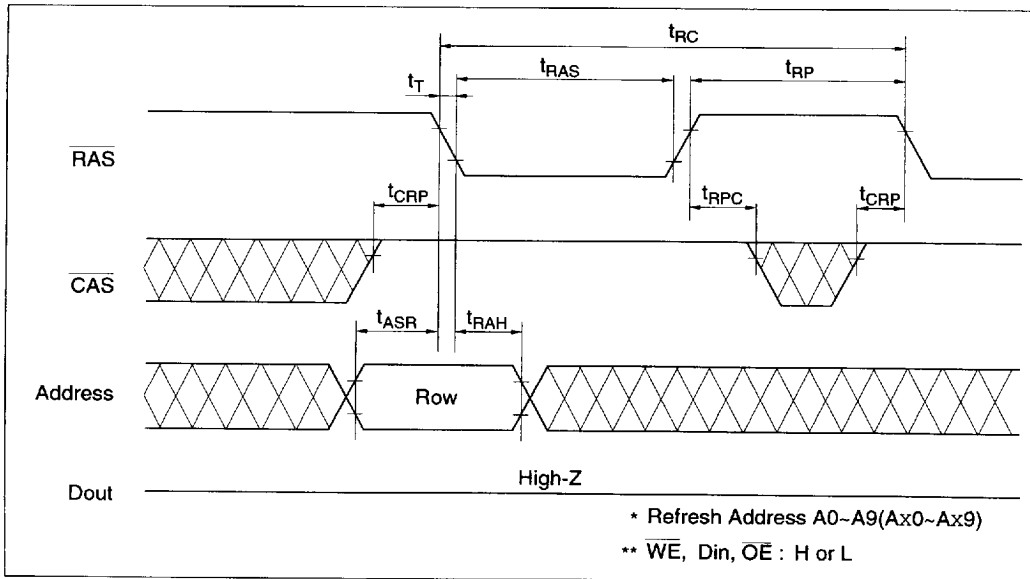

HM514400B/BL Series

Hidden Refresh Cycle

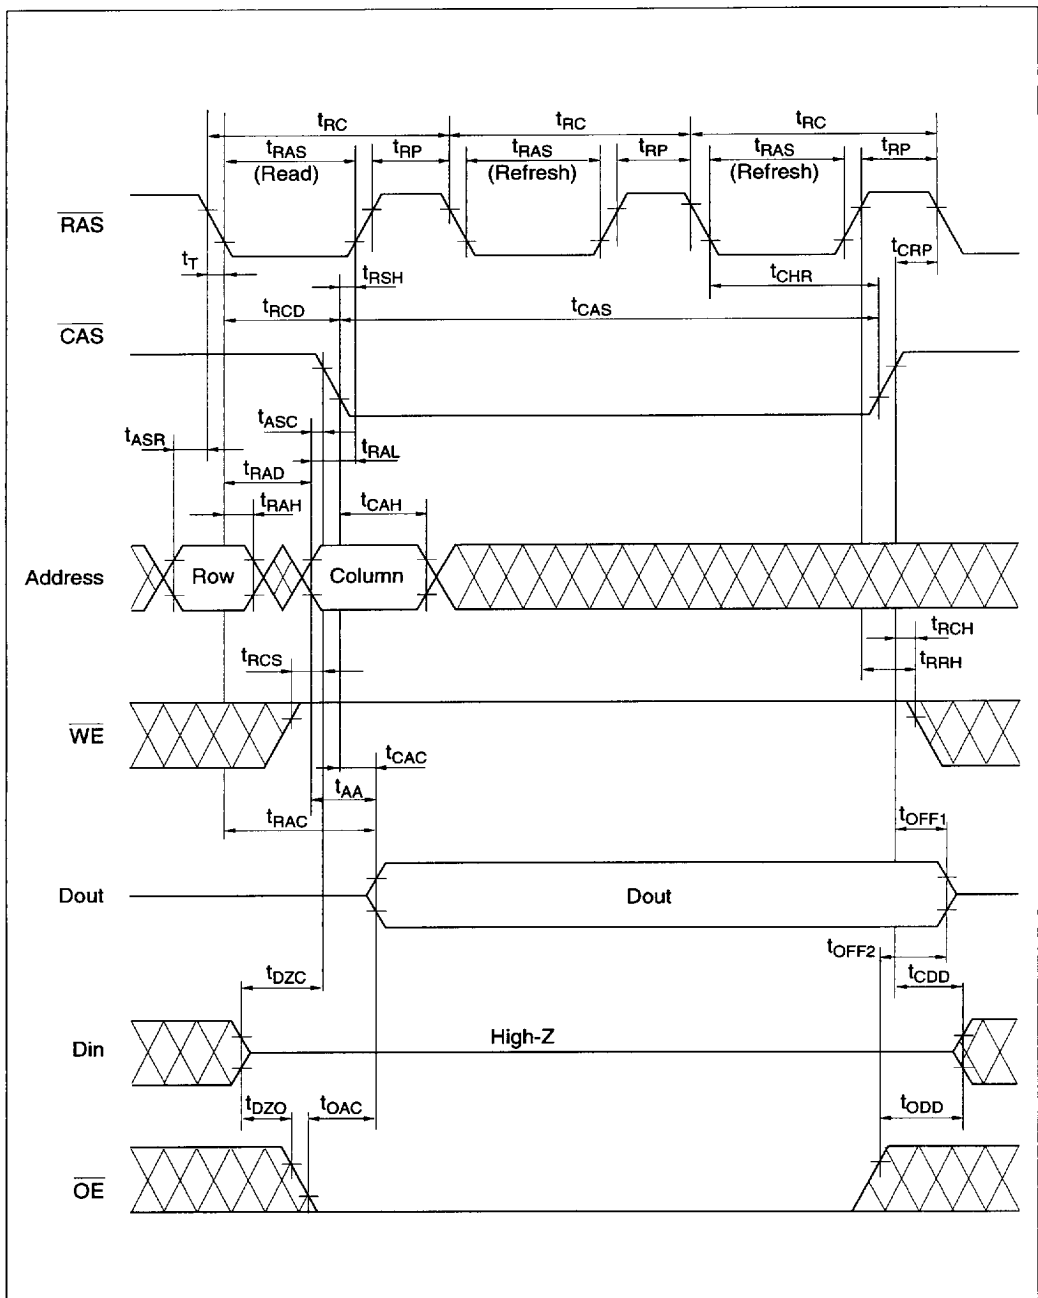


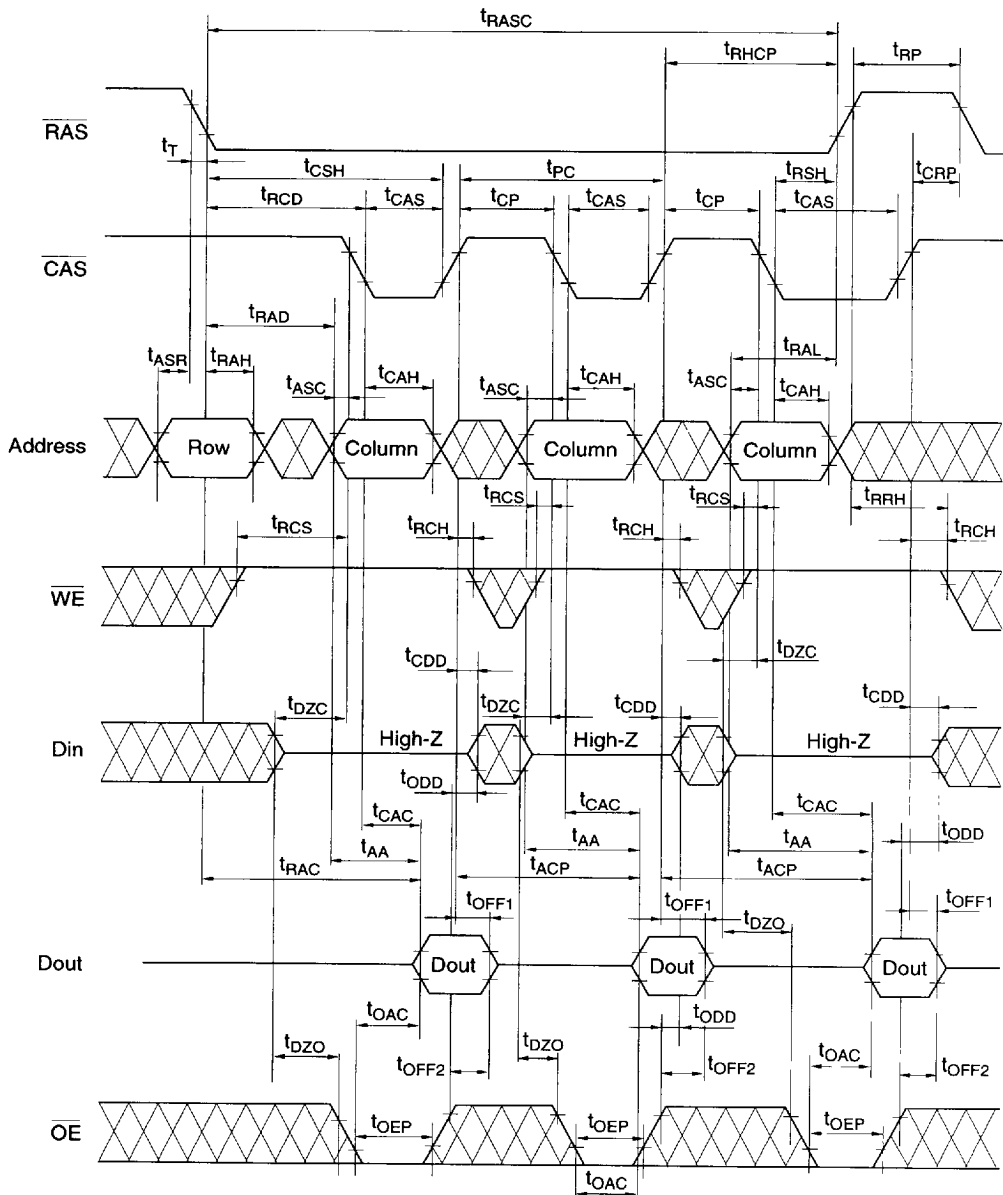


Hitachi 133

HM514400B/BL Series


Fast Page Mode Early Write Cycle

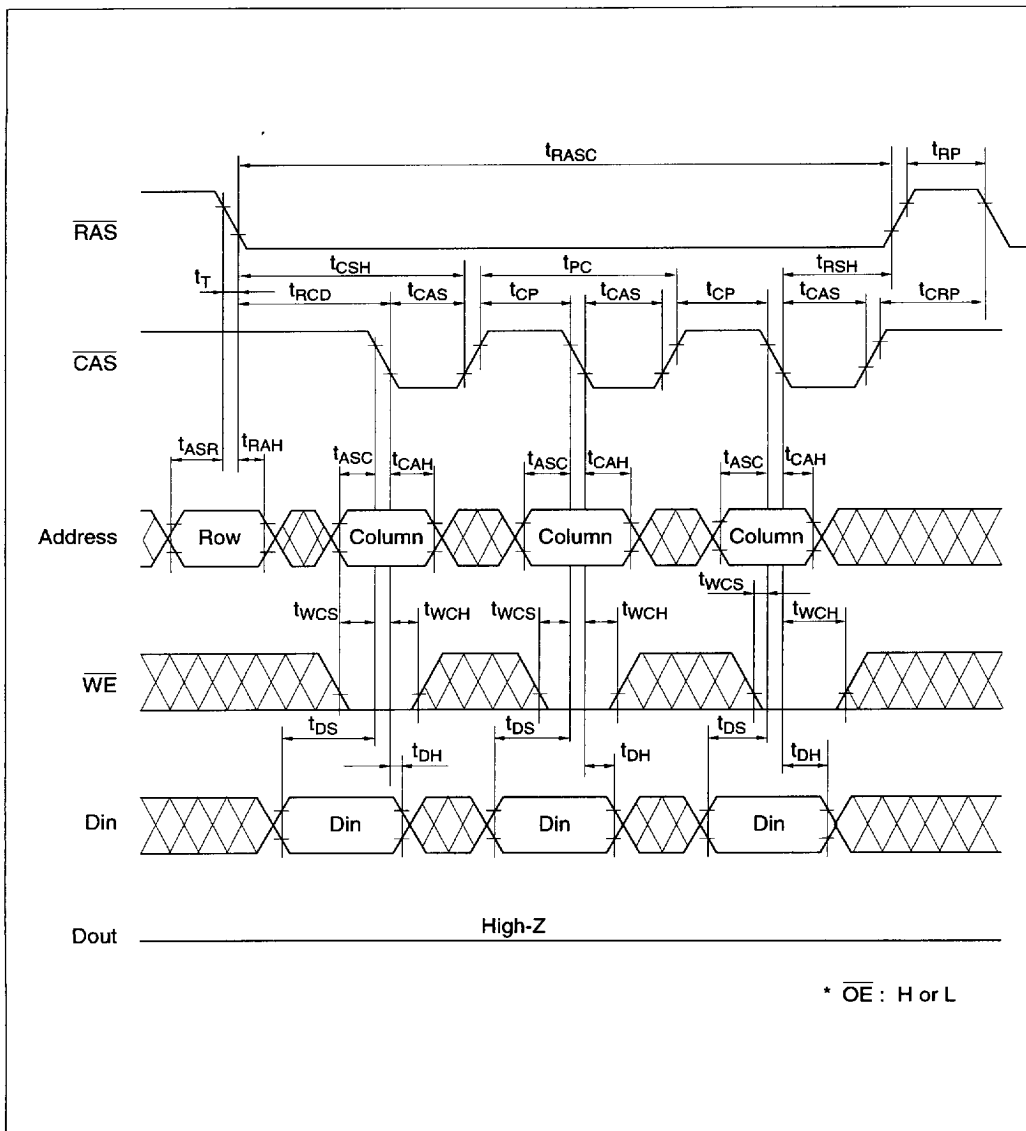


Fast Page Delayed Write Cycle

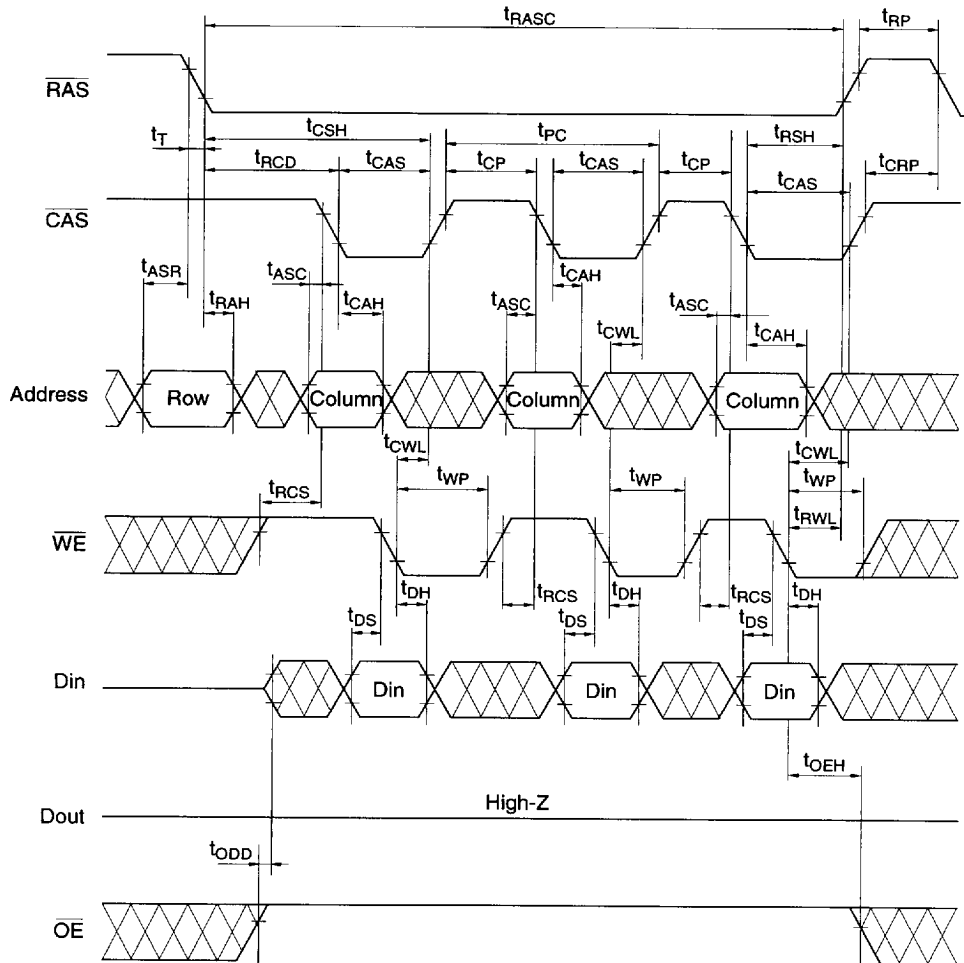


Fast Page Mode Read-Modify-Write Cycle

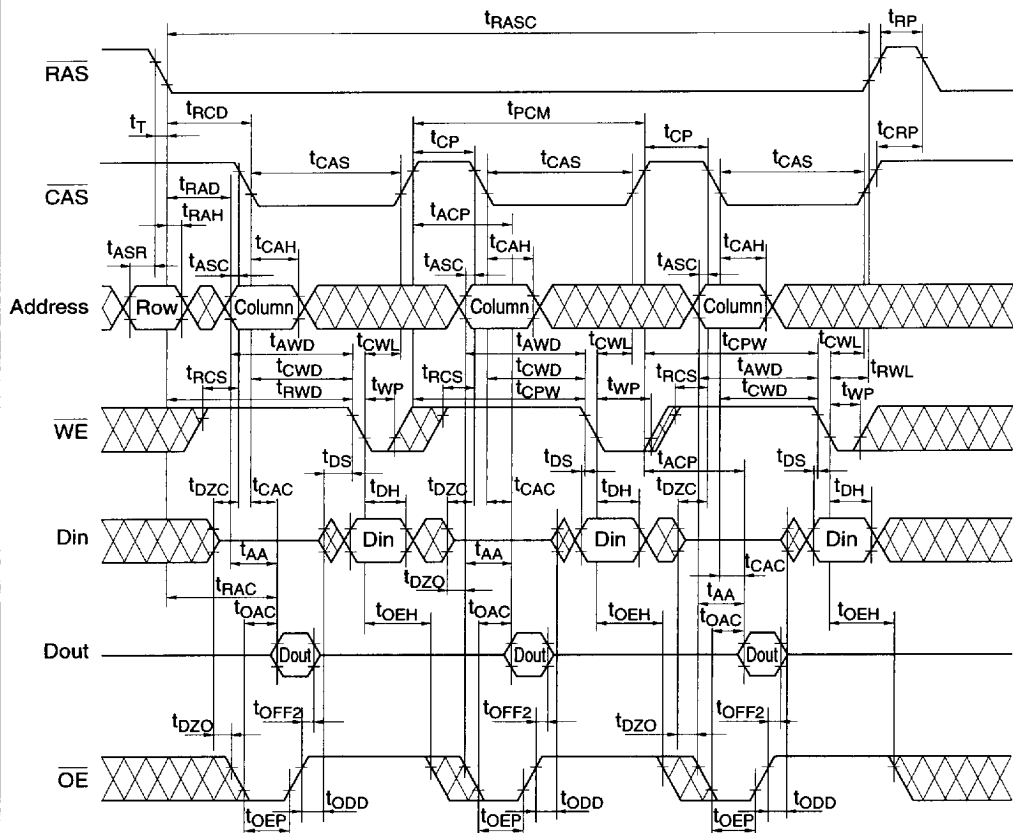

Test Mode Cycle

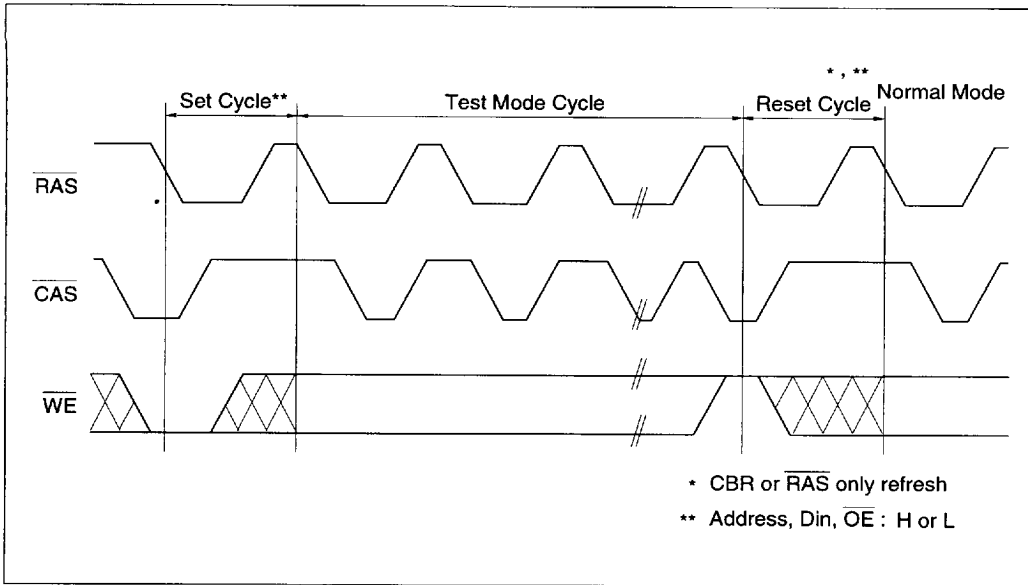


Test Mode Set Cycle

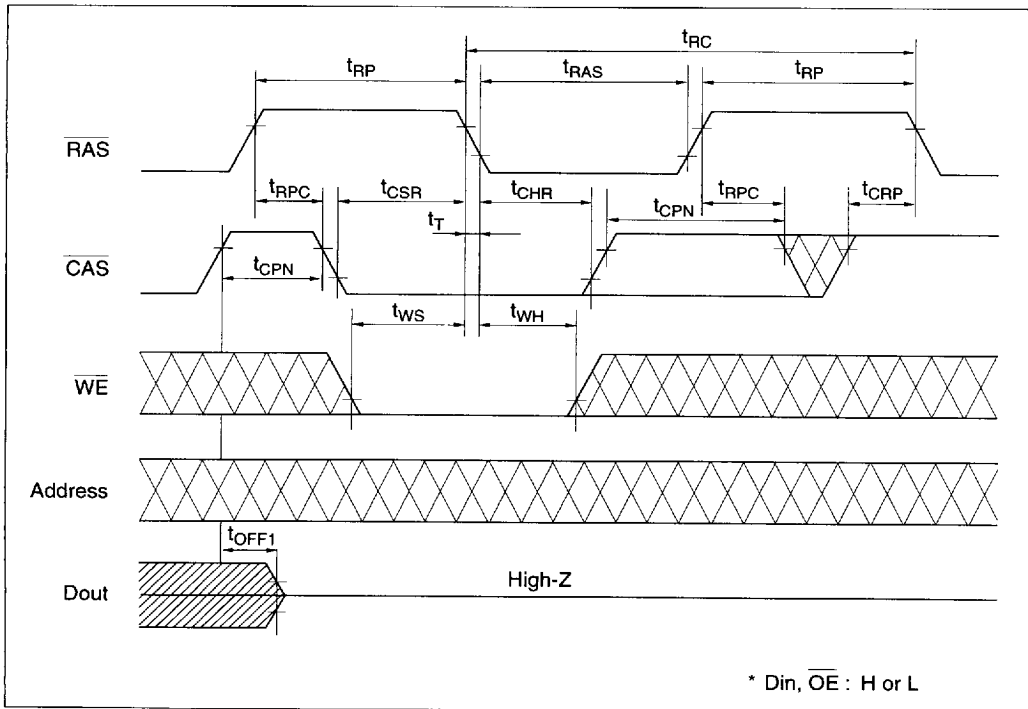

4496203 0026334 967

Hitachi 137

CAS-Before-RAS Refresh Counter Check Cycle (Read)

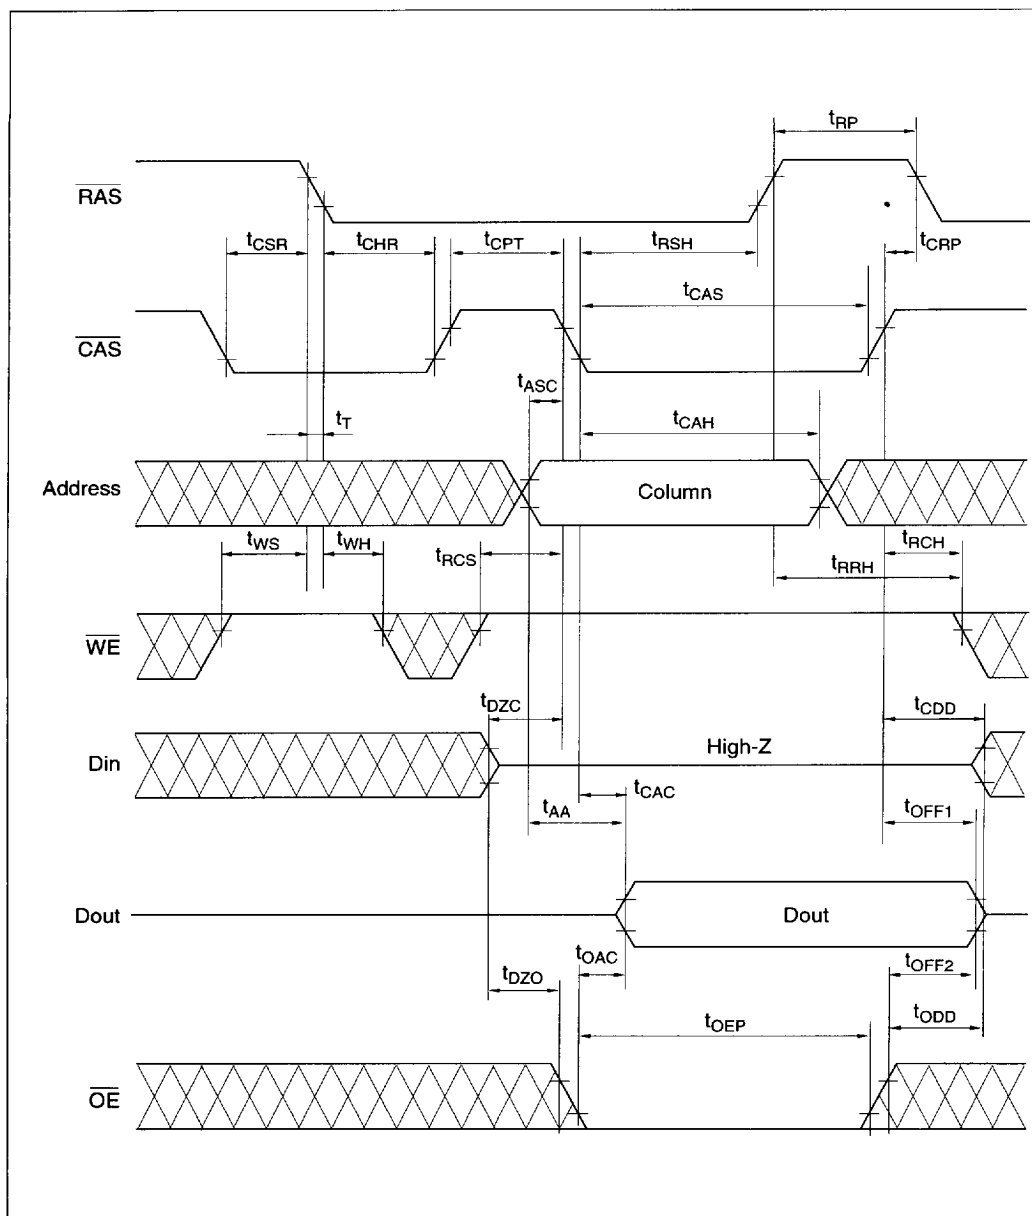

CAS-Before-RAS Refresh Counter Check Cycle (Write)

