


PLASTIC FACE PLATE DOUBLE CRIMP BNC

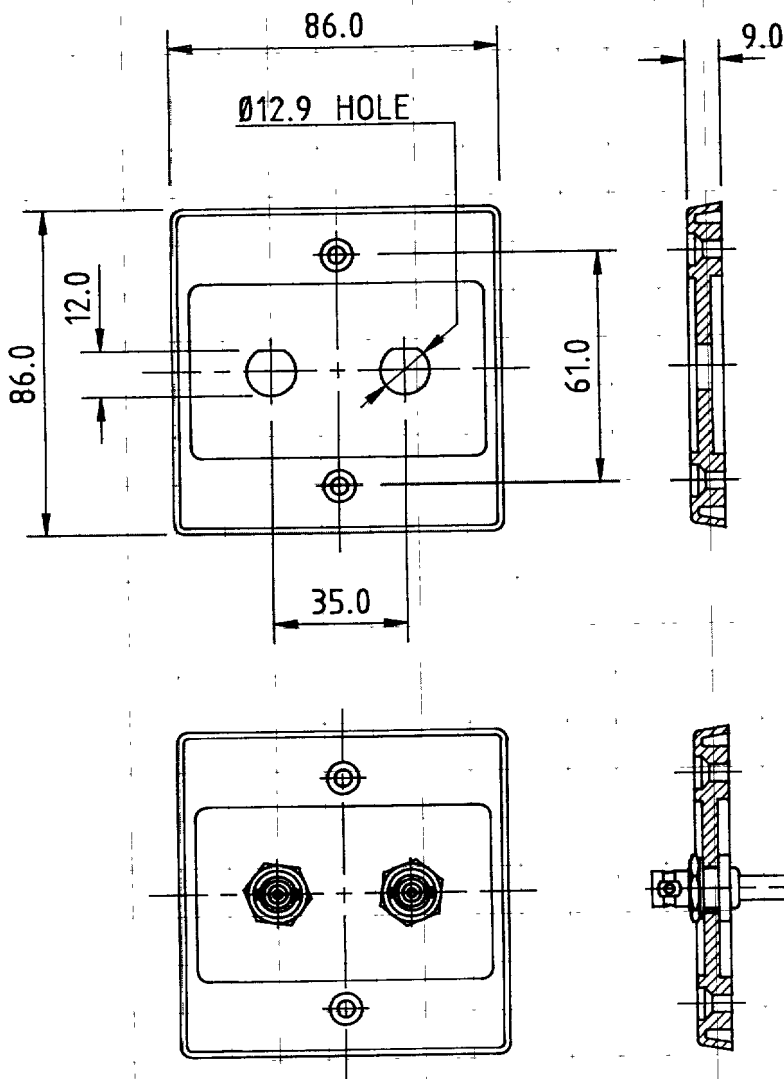

TECHNICAL DATA:

FACE PLATE

MANUFACTURED FROM WHITE
POLYAMIDE TO UL94V-0 TO
FIT STANDARD 86 x 86 BS.
MOUNTING BOXES.

BNC SERIES

TYPE:	BAYONET LOCKING CONNECTOR TO SUIT COMMON R.F. CABLES
BODY MATERIAL:	SILVER PLATED BRASS
CONTACT :	SILVER PLATED BERYLLIUM COPPER
INSULATOR:	P.T.F.E.
NOMINAL IMPEDANCE:	75 OHMS OR 50 OHMS
WORKING VOLTAGE:	500V PEAK
PROOF VOLTAGE:	2000V PEAK
FREQUENCY:	TO 4000 MHz

NOTE!

CRIMP BNC JACKS SHOWN ASSEMBLED
TO FACE PLATE FOR ILLUSTRATION
PURPOSES. CONNECTORS SUPPLIED LOOSE
FOR CONVENIENCE OF TERMINATION
REQUIREMENTS.

STANDARD FACE PLATES AVAILABLE:

- NX4081/6: FACE PLATE AND 2 SCREWS M3.5x30
- NX4081/5: PRELOADED WITH 2x75 OHM CRIMP BNC BULKHEAD JACKS
- NX4138/5: PRELOADED WITH 2x50 OHM CRIMP BNC BULKHEAD JACKS

PRELOADED ASSEMBLIES INCLUDE 2 SCREWS M3.5x30

2CRIMPBNC

The Mycalex Company Ltd.

Wilkinson Road, Love Lane, Cirencester, Gloucestershire, England GL7 1YT

Telephone 0285 651811/651555

Fax: 0285 650379

A member of the Mycalex Group of Companies



Q5076

