

# NLSF595

## Serial (SPI) Tri-Color LED Driver

The NLSF595 is advanced CMOS shift register with open drain outputs fabricated with 0.6  $\mu\text{m}$  silicon gate CMOS technology. This device is used in conjunction with a microcontroller, with only one dedicated line. All pins have Overvoltage Protection that allows voltages above  $V_{CC}$  up to 7.0 V to be present on the pins without damage or disruption of operation of the part, regardless of the operating voltage. This device may be used between 2.0 and 5.5 volts, the output driver level may be independent of supply voltage: 0-7.0 volts.

### Features

- Parallel Outputs are Open Drain Capable of Sinking > 12 mA  
Output Withstands up to +7.0 Regardless of  $V_{CC}$
- Standard Serial (SPI) Interface, Data, Clock, Enable (Low)
- All Inputs CMOS Level Compatible
- Frees up I/O around a Microcontroller
- Only One Pin Dedicated to this Device (Latch Enable)
- Output Enable may be Permanently Pulled Low
- High Speed Clocking,  $F_{max} > 25 \text{ MHz}$  (Shift Clock)
- Eight Bits Parallel Output
- Double Buffered Outputs, so Register may Fill without Affecting Output
- STD CMOS Serial Output, may be used to Cascade more than One Device
- Each Part Controls Two Tri-Color LEDs
- Two Devices can Control 5 Tri-Color LEDs
- Low Leakage:  $I_{CC} = 2.0 \mu\text{A}$  (Max) at  $T_A = 25^\circ\text{C}$
- Latchup Performance Exceeds 100 mA
- QFN-16/TSSOP-16 Packages
- ESD Performance: HBM > 2000 V; MM > 200 V
- Functionally Similar to the Popular 74VHC595




**ON Semiconductor®**

<http://onsemi.com>


### MARKING DIAGRAMS





**QFN-16**  
**MN SUFFIX**  
**CASE 485G**



(Top View)



**TSSOP-16**  
**DT SUFFIX**  
**CASE 948F**



**SOIC-16**  
**D SUFFIX**  
**CASE 751B**



A = Assembly Location  
WL, L = Wafer Lot  
YY, Y = Year  
WW, W = Work Week

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 12 of this data sheet.

NLSF595

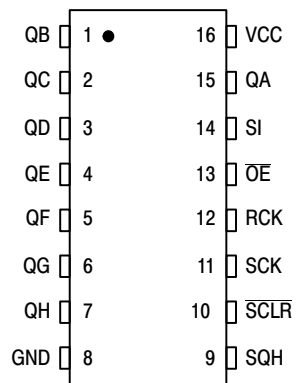


Figure 1. Pin Assignment (TSSOP-16/SOIC-16)

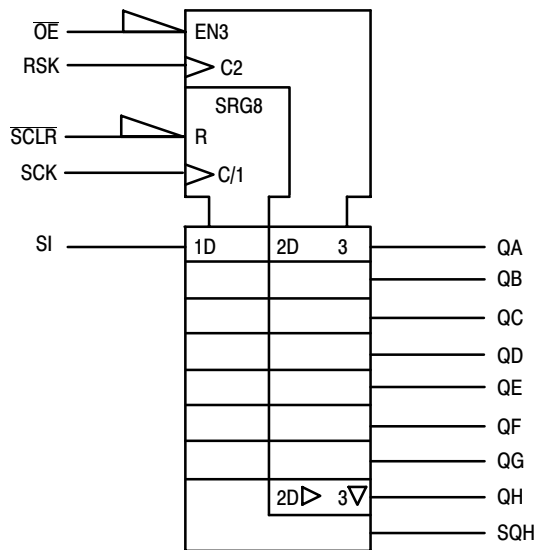


Figure 2. IEC Logic Symbol

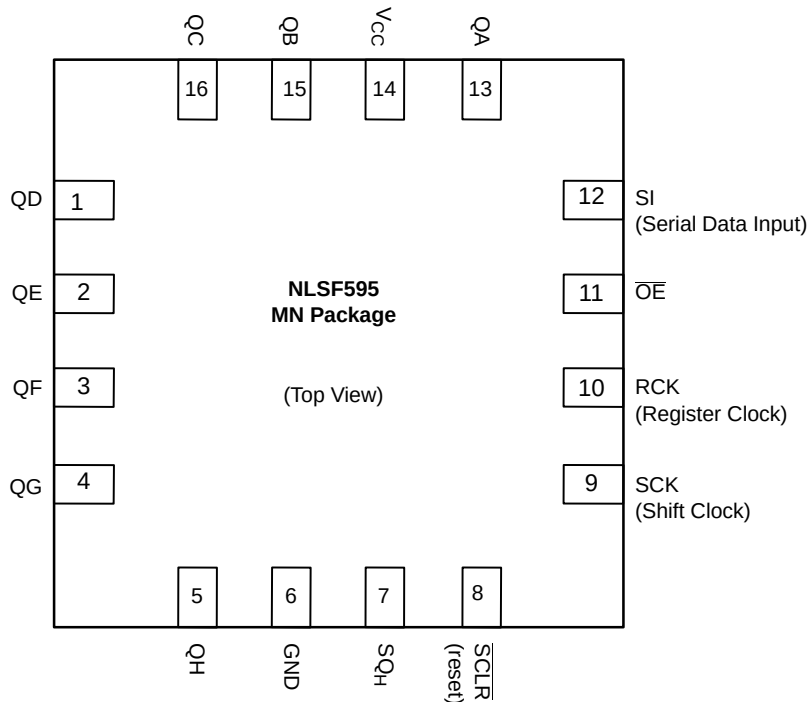


Figure 3. Pin Assignment (QFN-16)

# NLSF595

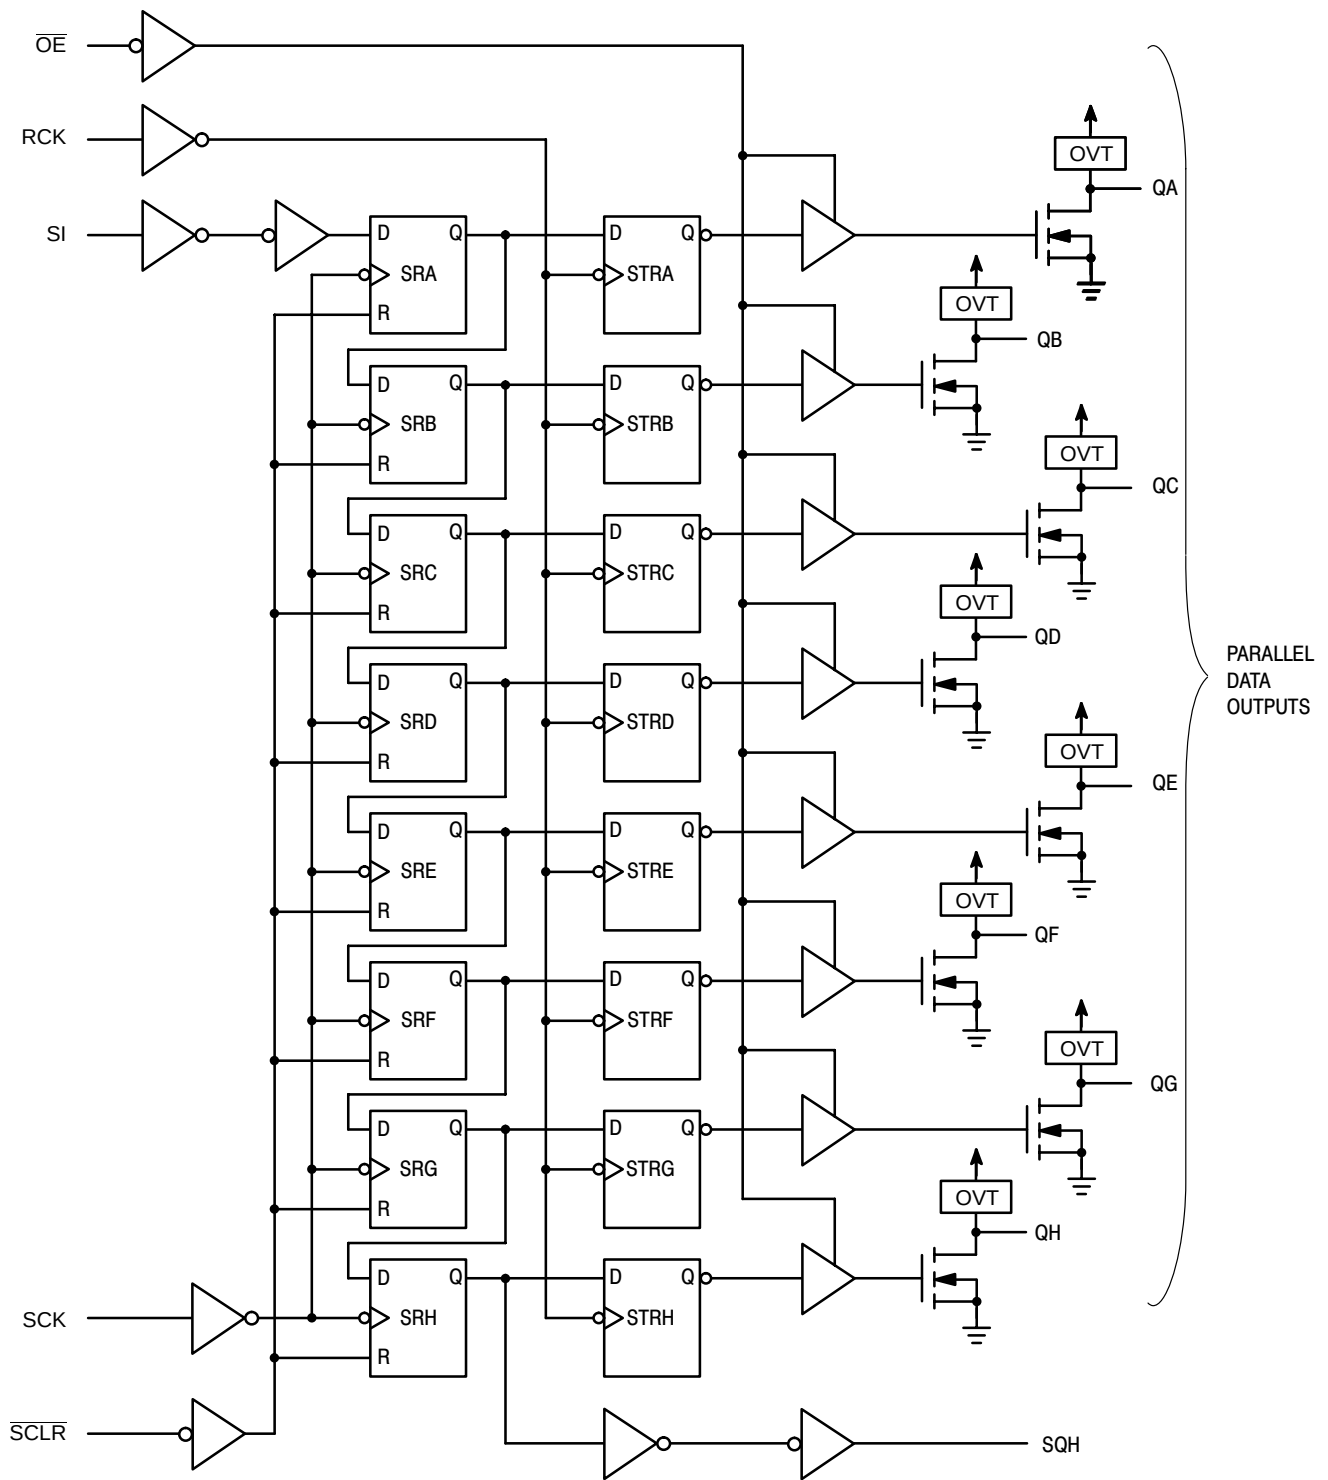


Figure 4. Expanded Logic Diagram

# NLSF595

## MAXIMUM RATINGS (Note 1)

| Symbol                | Parameter                                                                  | Value                        | Unit |
|-----------------------|----------------------------------------------------------------------------|------------------------------|------|
| V <sub>CC</sub>       | Positive DC Supply Voltage                                                 | -0.5 to +7.0                 | V    |
| V <sub>IN</sub>       | Digital Input Voltage                                                      | -0.5 to +7.0                 | V    |
| V <sub>OUT</sub>      | DC Output Voltage                                                          | -0.5 to V <sub>CC</sub> +7.0 | V    |
| I <sub>IK</sub>       | Input Diode Current                                                        | -20                          | mA   |
| I <sub>OK</sub>       | Output Diode Current                                                       | ± 50                         | mA   |
| I <sub>OUT</sub>      | DC Output Current, per Pin                                                 | +50                          | mA   |
| I <sub>CC</sub>       | DC Supply Current, V <sub>CC</sub> and GND Pins                            | ± 75                         | mA   |
| P <sub>D</sub>        | Power Dissipation in Still Air                                             | 450                          | mW   |
| T <sub>STG</sub>      | Storage Temperature Range                                                  | -65 to +150                  | °C   |
| I <sub>LATCH-UP</sub> | Latch-Up Performance Above V <sub>CC</sub> and Below GND at 125°C (Note 2) | ± 300                        | mA   |
| θ <sub>JA</sub>       | Thermal Resistance, Junction to Ambient                                    | 128                          | °C/W |

- Maximum Ratings are those values beyond which damage to the device may occur. Functional operation should be restricted to the Recommended Operating Conditions.
- Tested to EIA/JESD78

## RECOMMENDED OPERATING CONDITIONS

| Symbol                          | Characteristics                                                                               | Min | Max             | Unit |
|---------------------------------|-----------------------------------------------------------------------------------------------|-----|-----------------|------|
| V <sub>CC</sub>                 | DC Supply Voltage                                                                             | 2.0 | 5.5             | V    |
| V <sub>IN</sub>                 | DC Input Voltage                                                                              | 0   | 5.5             | V    |
| V <sub>OUT</sub>                | DC Output Voltage                                                                             | 0   | V <sub>CC</sub> | V    |
| T <sub>A</sub>                  | Operating Temperature Range, all Package Types                                                | -55 | 125             | °C   |
| t <sub>r</sub> , t <sub>f</sub> | Input Rise or Fall Time<br>V <sub>CC</sub> = 3.3 V ± 0.3 V<br>V <sub>CC</sub> = 5.0 V ± 0.5 V | 0   | 50<br>15        | ns/V |

## FUNCTION TABLE

| Operation                                            | Inputs       |                   |                   |                 |                    | Resulting Function                                           |                                    |                                   |                            |
|------------------------------------------------------|--------------|-------------------|-------------------|-----------------|--------------------|--------------------------------------------------------------|------------------------------------|-----------------------------------|----------------------------|
|                                                      | Reset (SCLR) | Serial Input (SI) | Shift Clock (SCK) | Reg Clock (RCK) | Output Enable (OE) | Shift Register Contents                                      | Storage Register Contents          | Serial Output (SQH)               | Parallel Outputs (QA - QH) |
| Clear shift register                                 | L            | X                 | X                 | L, H, ↓         | L                  | L                                                            | U                                  | L                                 | U                          |
| Shift data into shift register                       | H            | D                 | ↑                 | L, H, ↓         | L                  | D → SR <sub>A</sub> ;<br>SR <sub>N</sub> → SR <sub>N+1</sub> | U                                  | SR <sub>G</sub> → SR <sub>H</sub> | U                          |
| Registers remains unchanged                          | H            | X                 | L, H, ↓           | X               | L                  | U                                                            | **                                 | U                                 | **                         |
| Transfer shift register contents to storage register | H            | X                 | L, H, ↓           | ↑               | L                  | U                                                            | SR <sub>N</sub> → STR <sub>N</sub> | *                                 | SR <sub>N</sub>            |
| Storage register remains unchanged                   | X            | X                 | X                 | L, H, ↓         | L                  | *                                                            | U                                  | *                                 | U                          |
| Enable parallel outputs                              | X            | X                 | X                 | X               | L                  | *                                                            | **                                 | *                                 | Enabled                    |
| Force outputs into high impedance state              | X            | X                 | X                 | X               | H                  | *                                                            | **                                 | *                                 | Z                          |

SR = shift register contents  
STR = storage register contents

D = data (L, H) logic level  
U = remains unchanged

↓ = High- to- Low  
↑ = Low- to- High

\* = depends on Reset and Shift Clock inputs  
\*\* = depends on Register Clock input

DC ELECTRICAL CHARACTERISTICS

| Symbol           | Parameter                                                                                                    | Test Conditions                                                                                            | V <sub>CC</sub><br>(V)   | T <sub>A</sub> = 25°C      |                   |                             | T <sub>A</sub> = ≤ 85°C    |                             | T <sub>A</sub> = ≤ 125°C   |                             | Unit |
|------------------|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|--------------------------|----------------------------|-------------------|-----------------------------|----------------------------|-----------------------------|----------------------------|-----------------------------|------|
|                  |                                                                                                              |                                                                                                            |                          | Min                        | Typ               | Max                         | Min                        | Max                         | Min                        | Max                         |      |
| V <sub>IH</sub>  | Minimum High-Level Input Voltage                                                                             |                                                                                                            | 2.0<br>3.0<br>4.5<br>5.5 | 1.5<br>2.1<br>3.15<br>3.85 |                   |                             | 1.5<br>2.1<br>3.15<br>3.85 |                             | 1.5<br>2.1<br>3.15<br>3.85 |                             | V    |
| V <sub>IL</sub>  | Maximum Low-Level Input Voltage                                                                              |                                                                                                            | 2.0<br>3.0<br>4.5<br>5.5 |                            |                   | 0.59<br>0.9<br>1.35<br>1.65 |                            | 0.59<br>0.9<br>1.35<br>1.65 |                            | 0.59<br>0.9<br>1.35<br>1.65 | V    |
| V <sub>OH</sub>  | Minimum High-Level Serial Output Only Output Voltage<br>V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub> | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub><br>I <sub>OH</sub> = - 50 µA                          | 2.0<br>3.0<br>4.5        | 1.9<br>2.9<br>4.4          | 2.0<br>3.0<br>4.5 |                             | 1.9<br>2.9<br>4.4          |                             | 1.9<br>2.9<br>4.4          |                             | V    |
|                  |                                                                                                              | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub><br>I <sub>OH</sub> = -4 mA<br>I <sub>OH</sub> = -8 mA | 3.0<br>4.5               | 2.58<br>3.94               |                   |                             | 2.48<br>3.80               |                             | 2.34<br>3.66               |                             |      |
| V <sub>OL</sub>  | Maximum Low-Level Output Voltage<br>V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>                     | I <sub>OL</sub> = 50 µA                                                                                    | 2.0<br>3.0<br>4.5        |                            | 0.0<br>0.0<br>0.0 | 0.1<br>0.1<br>0.1           |                            | 0.1<br>0.1<br>0.1           |                            | 0.1<br>0.1<br>0.1           | V    |
|                  |                                                                                                              | I <sub>OL</sub> = 4 mA<br>I <sub>OL</sub> = 8 mA                                                           | 3.0<br>4.5               |                            |                   | 0.36<br>0.36                |                            | 0.44<br>0.44                |                            | 0.52<br>0.52                |      |
| V <sub>OL2</sub> | Maximum Low-Level Output Voltage with Max. Load<br>V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>      | I <sub>OL</sub> = 20 mA<br>I <sub>OL</sub> = 25 mA                                                         | 3.0<br>4.5               |                            | 0.8<br>0.5        | 1.0<br>0.6                  |                            | 1.1<br>0.7                  |                            | 1.25<br>0.8                 | V    |
| I <sub>IN</sub>  | Maximum Input Leakage Current                                                                                | V <sub>IN</sub> = 5.5 V or GND                                                                             | 0 to 5.5                 |                            |                   | ±0.1                        |                            | ±1.0                        |                            | ±1.0                        | µA   |
| I <sub>CC</sub>  | Maximum Quiescent Supply Current                                                                             | V <sub>IN</sub> = V <sub>CC</sub> or GND                                                                   | 5.5                      |                            |                   | 4.0                         |                            | 40.0                        |                            | 40.0                        | µA   |
| I <sub>OZ</sub>  | Three-State Output Off-State Current<br>QA-QH                                                                | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub><br>V <sub>OUT</sub> = V <sub>CC</sub> or GND          | 5.5                      |                            |                   | ±0.25                       |                            | ±2.5                        |                            | ±2.5                        | µA   |
| I <sub>LKG</sub> | Active (2) State Off Output Leakage Current<br>QA-QH                                                         | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub><br>V <sub>OUT</sub> = V <sub>CC</sub> or GND          | 5.5                      |                            |                   | ±0.25                       |                            | ±2.5                        |                            | ±2.5                        | µA   |
| I <sub>OFF</sub> | Power Off Output Leakage<br>All Outputs                                                                      | V <sub>IN</sub> = 0 or 5.5 V<br>V <sub>OUT</sub> = 5.5 V                                                   | 0                        |                            |                   | ±0.25                       |                            | ±2.5                        |                            | ±2.5                        | µA   |

**AC ELECTRICAL CHARACTERISTICS** (Input  $t_r = t_f = 3.0$  ns)

| Symbol                   | Parameter                                                                 | Test Conditions                                                | $T_A = 25^\circ\text{C}$ |             |              | $T_A = \leq 85^\circ\text{C}$ |              | $T_A = \leq 125^\circ\text{C}$ |              | Unit |
|--------------------------|---------------------------------------------------------------------------|----------------------------------------------------------------|--------------------------|-------------|--------------|-------------------------------|--------------|--------------------------------|--------------|------|
|                          |                                                                           |                                                                | Min                      | Typ         | Max          | Min                           | Max          | Min                            | Max          |      |
| $f_{\max}$               | Maximum Clock Frequency<br>(50% Duty Cycle)                               | $V_{CC} = 3.3 \pm 0.3$ V                                       | 80                       | 150         |              | 70                            |              | 70                             |              | MHz  |
|                          |                                                                           | $V_{CC} = 5.0 \pm 0.5$ V                                       | 135                      | 185         |              | 115                           |              | 115                            |              |      |
| $t_{PLH}$ ,<br>$t_{PHL}$ | Propagation Delay, SCK to SQH                                             | $V_{CC} = 3.3 \pm 0.3$ V $C_L = 15$ pF<br>$C_L = 50$ pF        |                          | 8.8<br>11.3 | 13.0<br>16.5 | 1.0<br>1.0                    | 15.0<br>18.5 | 1.0<br>1.0                     | 15.0<br>18.5 | ns   |
|                          |                                                                           | $V_{CC} = 5.0 \pm 0.5$ V $C_L = 15$ pF<br>$C_L = 50$ pF        |                          | 6.2<br>7.7  | 8.2<br>10.2  | 1.0<br>1.0                    | 9.4<br>11.4  | 1.0<br>1.0                     | 9.4<br>11.4  |      |
| $t_{PHL}$                | Propagation Delay, SCLR to SQH                                            | $V_{CC} = 3.3 \pm 0.3$ V $C_L = 15$ pF<br>$C_L = 50$ pF        |                          | 8.4<br>10.9 | 12.8<br>16.3 | 1.0<br>1.0                    | 13.7<br>17.2 | 1.0<br>1.0                     | 13.7<br>17.2 | ns   |
|                          |                                                                           | $V_{CC} = 5.0 \pm 0.5$ V $C_L = 15$ pF<br>$C_L = 50$ pF        |                          | 5.9<br>7.4  | 8.0<br>10.0  | 1.0<br>1.0                    | 9.1<br>11.1  | 1.0<br>1.0                     | 9.1<br>11.1  |      |
| $t_{PLZ}$                | Output Disable Time<br>RCK to QA-QH<br>Output Enable Time<br>RCK to QA-QH | $V_{CC} = 3.3 \pm 0.3$ V $C_L = 15$ pF<br>$C_L = 50$ pF        |                          | 7.7<br>10.2 | 11.9<br>15.4 | 1.0<br>1.0                    | 13.5<br>17.0 | 1.0<br>1.0                     | 13.5<br>17.0 | ns   |
|                          |                                                                           | $V_{CC} = 5.0 \pm 0.5$ V $C_L = 15$ pF<br>$C_L = 50$ pF        |                          | 5.4<br>6.9  | 7.4<br>9.4   | 1.0<br>1.0                    | 8.5<br>10.5  | 1.0<br>1.0                     | 8.5<br>10.5  |      |
| $t_{PZL}$                | Output Disable Time<br>RCK to QA-QH<br>Output Enable Time<br>RCK to QA-QH | $V_{CC} = 3.3 \pm 0.3$ V $C_L = 15$ pF<br>$C_L = 50$ pF        |                          | 7.7<br>10.2 | 11.9<br>15.4 | 1.0<br>1.0                    | 13.5<br>17.0 | 1.0<br>1.0                     | 13.5<br>17.0 | ns   |
|                          |                                                                           | $V_{CC} = 5.0 \pm 0.5$ V $C_L = 15$ pF<br>$C_L = 50$ pF        |                          | 5.4<br>6.9  | 7.4<br>9.4   | 1.0<br>1.0                    | 8.5<br>10.5  | 1.0<br>1.0                     | 8.5<br>10.5  |      |
| $t_{PZL}$                | Output Enable Time,<br>$\overline{OE}$ to QA-QH                           | $V_{CC} = 3.3 \pm 0.3$ V $C_L = 15$ pF<br>$R_L = 1$ k $\Omega$ |                          | 7.5<br>9.0  | 11.5<br>15.0 | 1.0<br>1.0                    | 13.5<br>17.0 | 1.0<br>1.0                     | 13.5<br>17.0 | ns   |
|                          |                                                                           | $V_{CC} = 5.0 \pm 0.5$ V $C_L = 15$ pF<br>$R_L = 1$ k $\Omega$ |                          | 4.8<br>8.3  | 8.6<br>10.6  | 1.0<br>1.0                    | 10.0<br>12.0 | 1.0<br>1.0                     | 10.0<br>12.0 |      |
| $t_{PLZ}$                | Output Disable Time,<br>$\overline{OE}$ to QA-QH                          | $V_{CC} = 3.3 \pm 0.3$ V $C_L = 50$ pF<br>$R_L = 1$ k $\Omega$ |                          | 12.1        | 15.7         | 1.0                           | 16.2         | 1.0                            | 16.2         | ns   |
|                          |                                                                           | $V_{CC} = 5.0 \pm 0.5$ V $C_L = 50$ pF<br>$R_L = 1$ k $\Omega$ |                          | 7.6         | 10.3         | 1.0                           | 11.0         | 1.0                            | 11.0         |      |
| $C_{IN}$                 | Input Capacitance                                                         |                                                                |                          | 4           | 10           |                               | 10           |                                | 10           | pF   |
| $C_{OUT}$                | Three-State Output Capacitance (Output in High-Impedance State), QA-QH    |                                                                |                          | 6           |              |                               | 10           |                                | 10           | pF   |

| C <sub>PD</sub> | Power Dissipation Capacitance (Note 3) | Typical @ 25°C, V <sub>CC</sub> = 5.0 V | pF |
|-----------------|----------------------------------------|-----------------------------------------|----|
|                 |                                        | 87                                      |    |

3.  $C_{PD}$  is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation:  $I_{CC(OPR)} = C_{PD} \cdot V_{CC} \cdot f_{in} + I_{CC}$ .  $C_{PD}$  is used to determine the no-load dynamic power consumption;  $P_D = C_{PD} \cdot V_{CC}^2 \cdot f_{in} + I_{CC} \cdot V_{CC}$ .

**NOISE CHARACTERISTICS** (Input  $t_r = t_f = 3.0$  ns,  $C_L = 50$  pF,  $V_{CC} = 5.0$  V)

| Symbol    | Characteristic                           | $T_A = 25^\circ\text{C}$ |      | Unit |
|-----------|------------------------------------------|--------------------------|------|------|
|           |                                          | Typ                      | Max  |      |
| $V_{OLP}$ | Quiet Output Maximum Dynamic $V_{OL}$    | 0.8                      | 1.0  | V    |
| $V_{OLV}$ | Quiet Output Minimum Dynamic $V_{OL}$    | -0.8                     | -1.0 | V    |
| $V_{IHD}$ | Minimum High Level Dynamic Input Voltage |                          | 3.5  | V    |
| $V_{ILD}$ | Maximum Low Level Dynamic Input Voltage  |                          | 1.5  | V    |

# NLSF595

## TIMING REQUIREMENTS (Input $t_r = t_f = 3.0\text{ns}$ )

| Symbol             | Parameter                                      | V <sub>CC</sub><br>V | T <sub>A</sub> = 25°C |            | T <sub>A</sub> = - 40 to 85°C | T <sub>A</sub> = - 55 to 125°C | Unit |
|--------------------|------------------------------------------------|----------------------|-----------------------|------------|-------------------------------|--------------------------------|------|
|                    |                                                |                      | Typ                   | Limit      | Limit                         | Limit                          |      |
| t <sub>su</sub>    | Setup Time, SI to SCK                          | 3.3<br>5.0           |                       | 3.5<br>3.0 | 3.5<br>3.0                    | 3.5<br>3.0                     | ns   |
| t <sub>su(H)</sub> | Setup Time, SCK to RCK                         | 3.3<br>5.0           |                       | 8.0<br>5.0 | 8.5<br>5.0                    | 8.5<br>5.0                     | ns   |
| t <sub>su(L)</sub> | Setup Time, $\overline{\text{SCLR}}$ to RCK    | 3.3<br>5.0           |                       | 8.0<br>5.0 | 9.0<br>5.0                    | 9.0<br>5.0                     | ns   |
| t <sub>h</sub>     | Hold Time, SI to SCK                           | 3.3<br>5.0           |                       | 1.5<br>2.0 | 1.5<br>2.0                    | 1.5<br>2.0                     | ns   |
| t <sub>h(L)</sub>  | Hold Time, $\overline{\text{SCLR}}$ to RCK     | 3.3<br>5.0           |                       | 0<br>0     | 0<br>0                        | 1.0<br>1.0                     | ns   |
| t <sub>rec</sub>   | Recovery Time, $\overline{\text{SCLR}}$ to SCK | 3.3<br>5.0           |                       | 3.0<br>2.5 | 3.0<br>2.5                    | 3.0<br>2.5                     | ns   |
| t <sub>w</sub>     | Pulse Width, SCK or RCK                        | 3.3<br>5.0           |                       | 5.0<br>5.0 | 5.0<br>5.0                    | 5.0<br>5.0                     | ns   |
| t <sub>w(L)</sub>  | Pulse Width, $\overline{\text{SCLR}}$          | 3.3<br>5.0           |                       | 5.0<br>5.0 | 5.0<br>5.0                    | 5.0<br>5.0                     | ns   |

## NLSF595


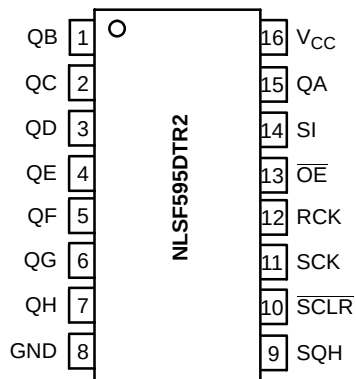


Figure 5. NLSF595 Shown Driving 5 3-Color LEDs

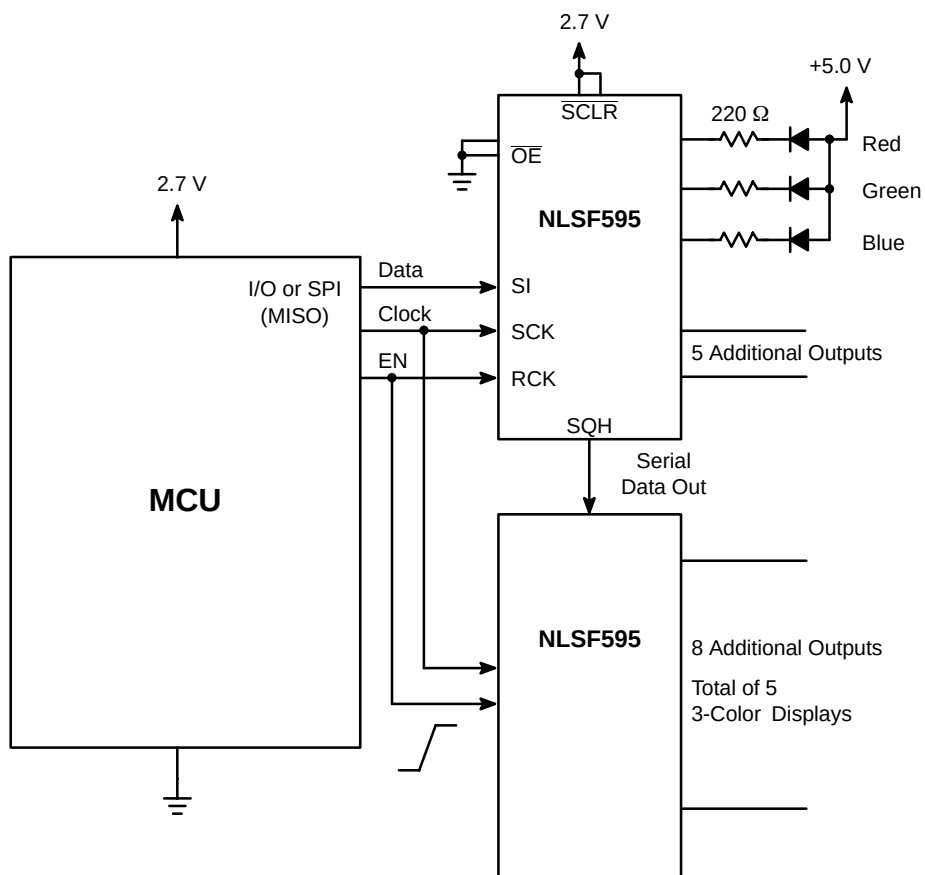

# NLSF595

## SWITCHING WAVEFORMS

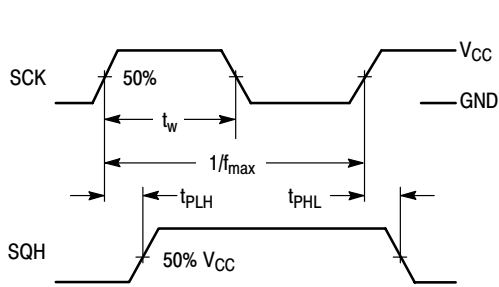


Figure 6.

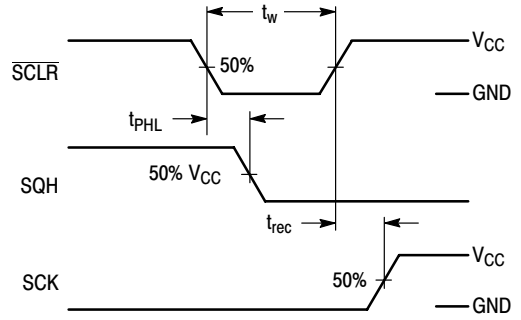


Figure 7.

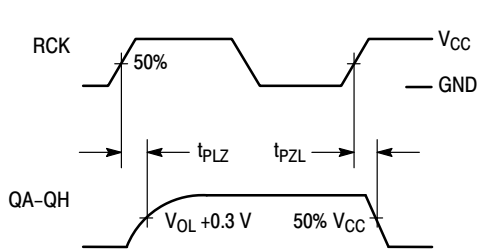


Figure 8.

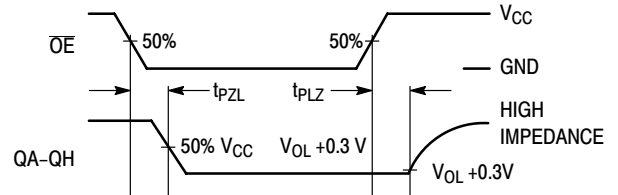


Figure 9.

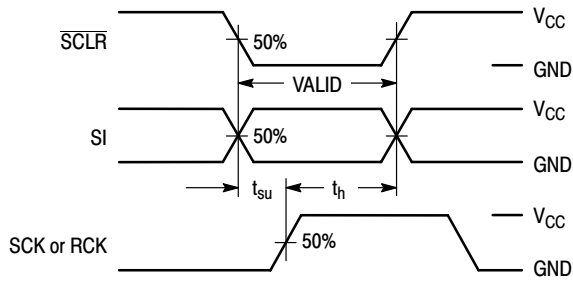


Figure 10.


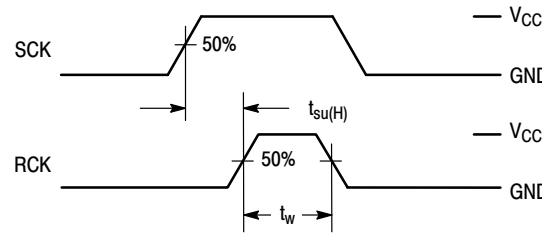



Figure 11.

## TEST CIRCUITS

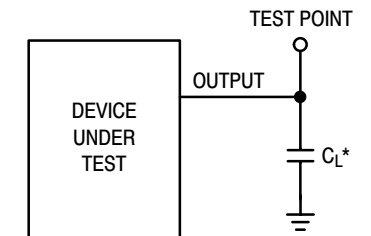

\*Includes all probe and jig capacitance

Figure 12.

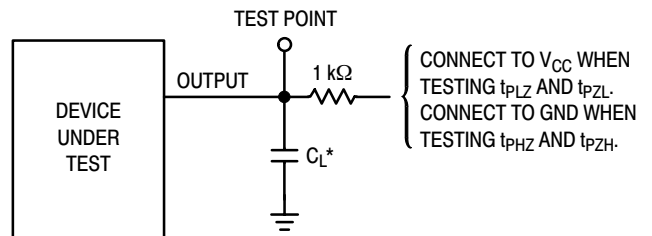

\*Includes all probe and jig capacitance

Figure 13.

## NLSF595

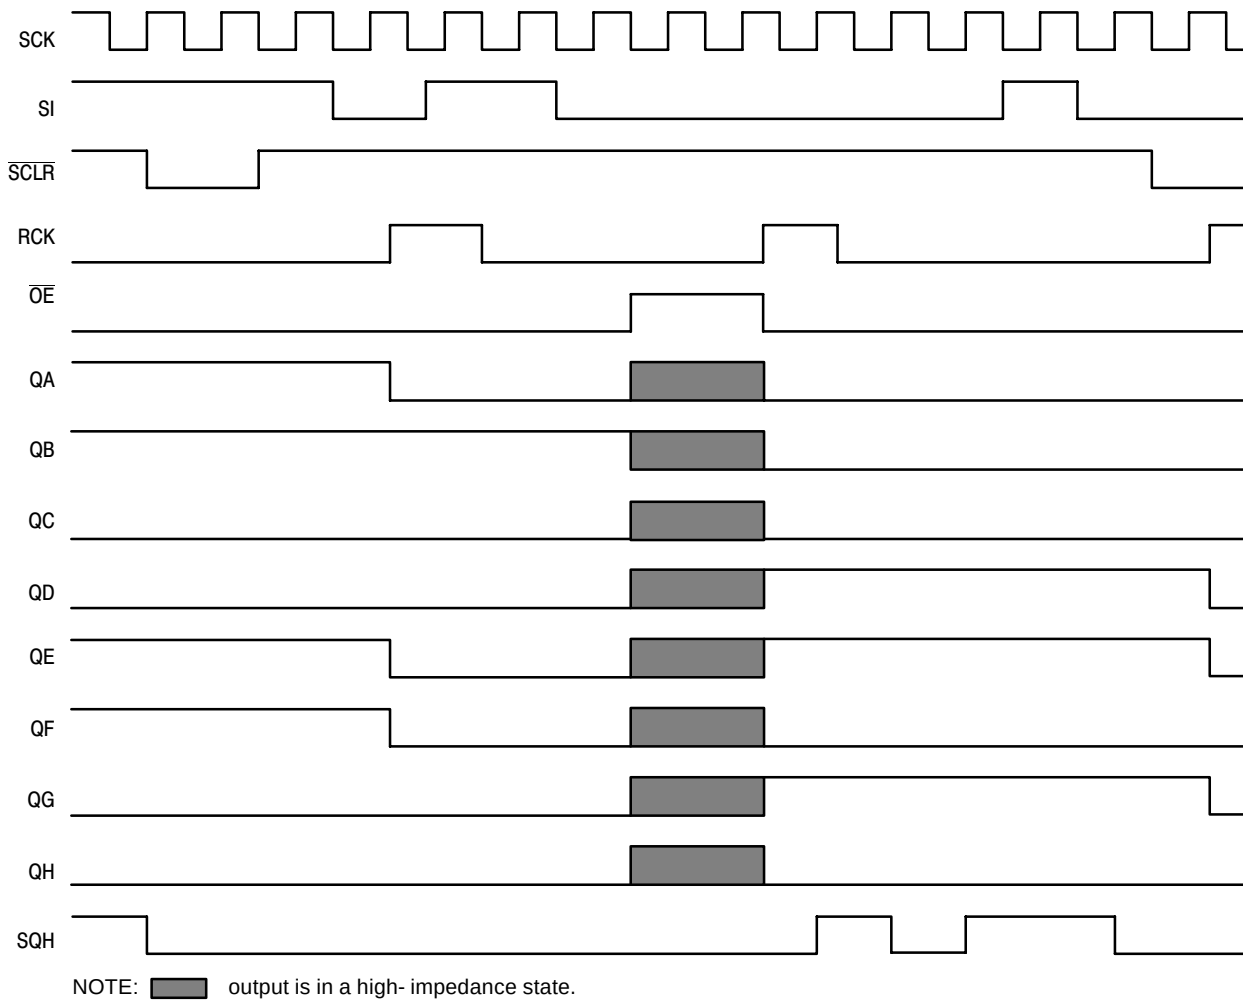


Figure 14. Timing Diagram

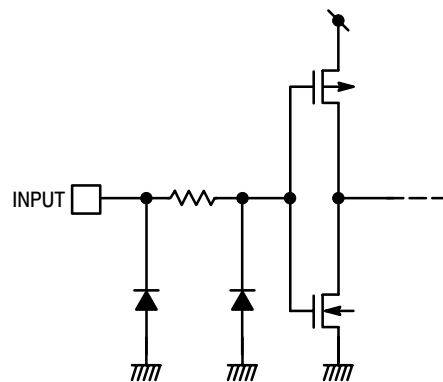


Figure 15. Input Equivalent Circuit

## NLSF595

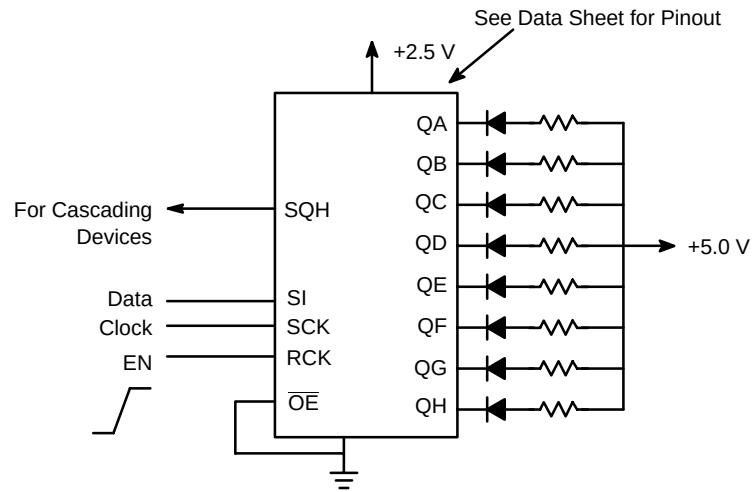
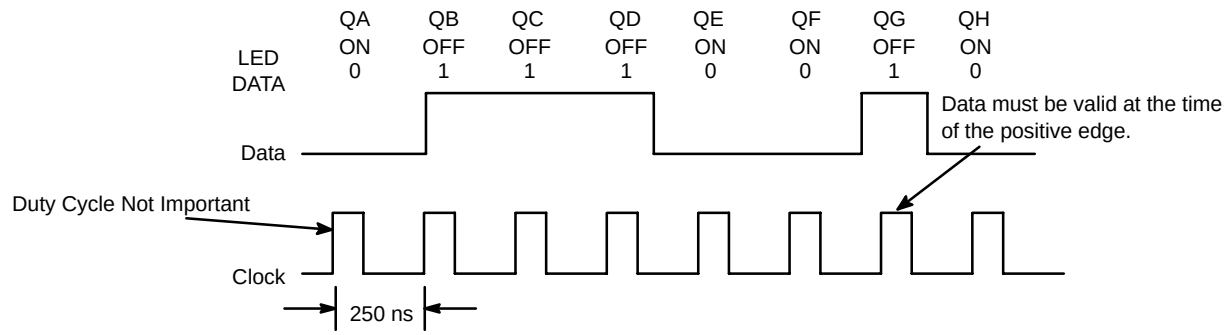


Figure 16. NLSF595 Example

# NLSF595

## DEVICE ORDERING INFORMATION

| Device Order Number | Device Nomenclature |            |                 |                |                    | Package Type | Tape & Reel Size† |
|---------------------|---------------------|------------|-----------------|----------------|--------------------|--------------|-------------------|
|                     | Circuit Indicator   | Technology | Device Function | Package Suffix | Tape & Reel Suffix |              |                   |
| NLSF595MNR2         | NL                  | SF         | 595             | MN             | R2                 | QFN          | 7-inch/2500 Unit  |
| NLSF595DTR2         | NL                  | SF         | 595             | DT             | R2                 | TSSOP        | 13-inch/2500 Unit |
| NLSF595DR2          | NL                  | SF         | 595             | D              | R2                 | SOIC         | 13-inch/2500 Unit |

†For additional tape and reel information, refer to Brochure BRD8011/D.

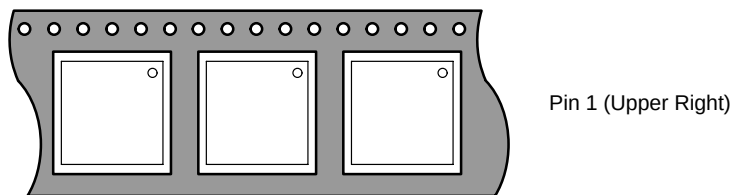


Figure 17. QFN Reel Configuration/Orientation


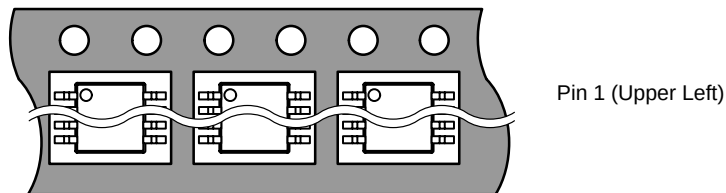


Figure 18. TSSOP-16/SOIC-16 Reel Configuration/Orientation

# NLSF595

## PACKAGE DIMENSIONS

QFN-16  
MN SUFFIX  
CASE 485G-01  
ISSUE O

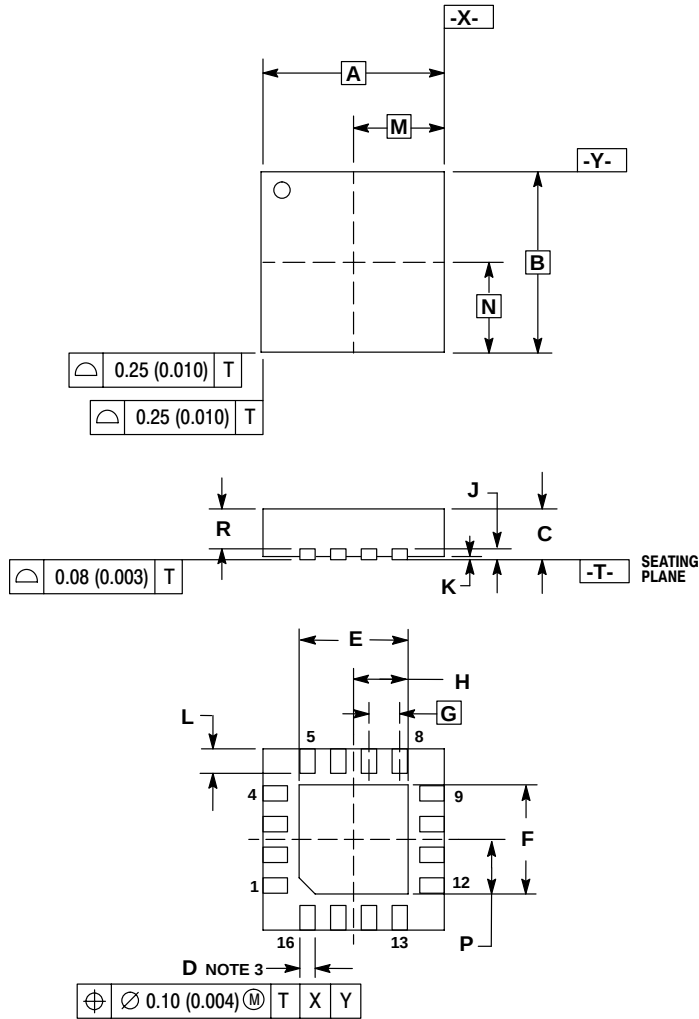

### NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION D APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.25 AND 0.30 MM FROM TERMINAL.
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 3.00 BSC    |       | 0.118 BSC |       |
| B   | 3.00 BSC    |       | 0.118 BSC |       |
| C   | 0.80        | 1.00  | 0.031     | 0.039 |
| D   | 0.23        | 0.28  | 0.009     | 0.011 |
| E   | 1.75        | 1.85  | 0.069     | 0.073 |
| F   | 1.75        | 1.85  | 0.069     | 0.073 |
| G   | 0.50 BSC    |       | 0.020 BSC |       |
| H   | 0.875       | 0.925 | 0.034     | 0.036 |
| J   | 0.20 REF    |       | 0.008 REF |       |
| K   | 0.00        | 0.05  | 0.000     | 0.002 |
| L   | 0.35        | 0.45  | 0.014     | 0.018 |
| M   | 1.50 BSC    |       | 0.059 BSC |       |
| N   | 1.50 BSC    |       | 0.059 BSC |       |
| P   | 0.875       | 0.925 | 0.034     | 0.036 |
| R   | 0.60        | 0.80  | 0.024     | 0.031 |

# NLSF595

## PACKAGE DIMENSIONS

TSSOP-16  
DT SUFFIX  
CASE 948F-01  
ISSUE O

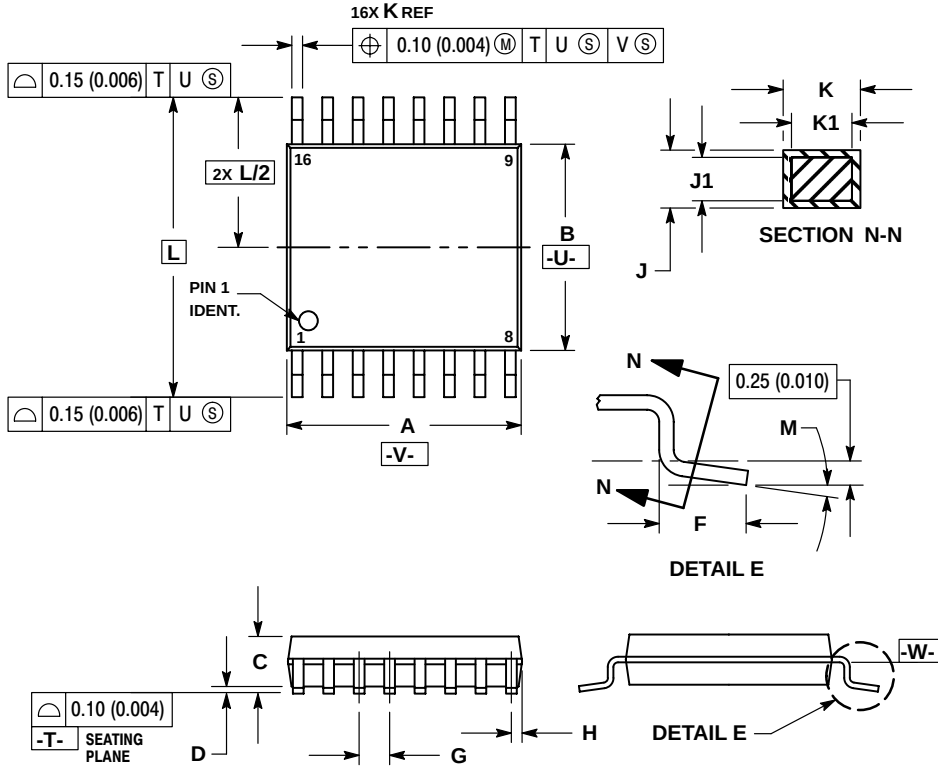

### NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 4.90        | 5.10 | 0.193     | 0.200 |
| B   | 4.30        | 4.50 | 0.169     | 0.177 |
| C   | ---         | 1.20 | ---       | 0.047 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.50        | 0.75 | 0.020     | 0.030 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| H   | 0.18        | 0.28 | 0.007     | 0.011 |
| J   | 0.09        | 0.20 | 0.004     | 0.008 |
| J1  | 0.09        | 0.16 | 0.004     | 0.006 |
| K   | 0.19        | 0.30 | 0.007     | 0.012 |
| K1  | 0.19        | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC    |      | 0.252 BSC |       |
| M   | 0°          | 8°   | 0°        | 8°    |

# NLSF595

## PACKAGE DIMENSIONS

SOIC-16  
D SUFFIX  
CASE 751B-05  
ISSUE J

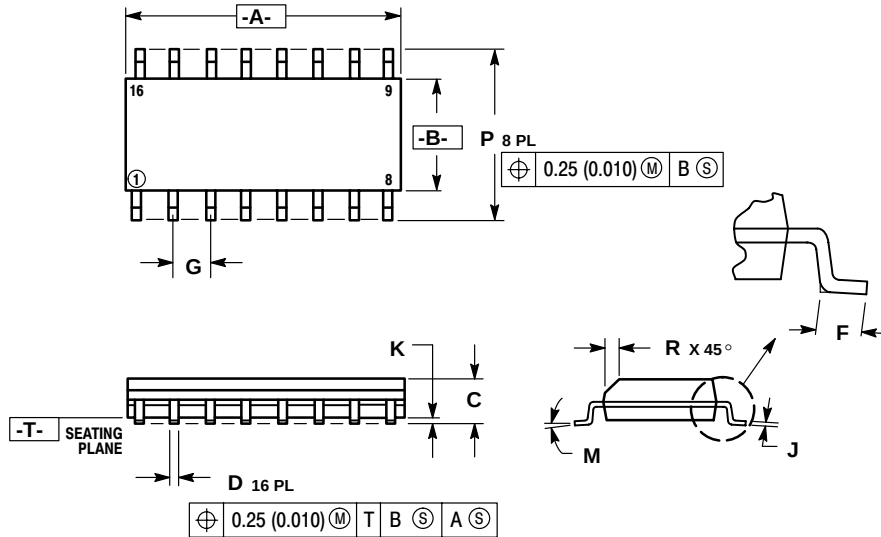

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
  4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
  5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 9.80        | 10.00 | 0.386     | 0.393 |
| B   | 3.80        | 4.00  | 0.150     | 0.157 |
| C   | 1.35        | 1.75  | 0.054     | 0.068 |
| D   | 0.35        | 0.49  | 0.014     | 0.019 |
| F   | 0.40        | 1.25  | 0.016     | 0.049 |
| G   | 1.27 BSC    |       | 0.050 BSC |       |
| J   | 0.19        | 0.25  | 0.008     | 0.009 |
| K   | 0.10        | 0.25  | 0.004     | 0.009 |
| M   | 0°          | 7°    | 0°        | 7°    |
| P   | 5.80        | 6.20  | 0.229     | 0.244 |
| R   | 0.25        | 0.50  | 0.010     | 0.019 |

**ON Semiconductor** and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

## PUBLICATION ORDERING INFORMATION

### Literature Fulfillment:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** ONlit@hibbertco.com

**N. American Technical Support:** 800-282-9855 Toll Free USA/Canada

**JAPAN:** ON Semiconductor, Japan Customer Focus Center  
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051  
**Phone:** 81-3-5773-3850

**ON Semiconductor Website:** <http://onsemi.com>

For additional information, please contact your local  
Sales Representative.