



Very Fast-Acting Ferrule Fuses

 $\frac{1}{4}" \times 1\frac{1}{4}"$ GBB
GBB-V

Dimensional Data

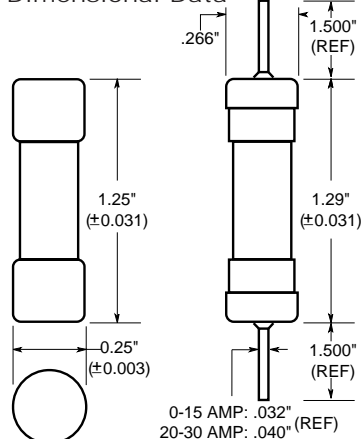

Time-Current Characteristic Curves-Average Melt

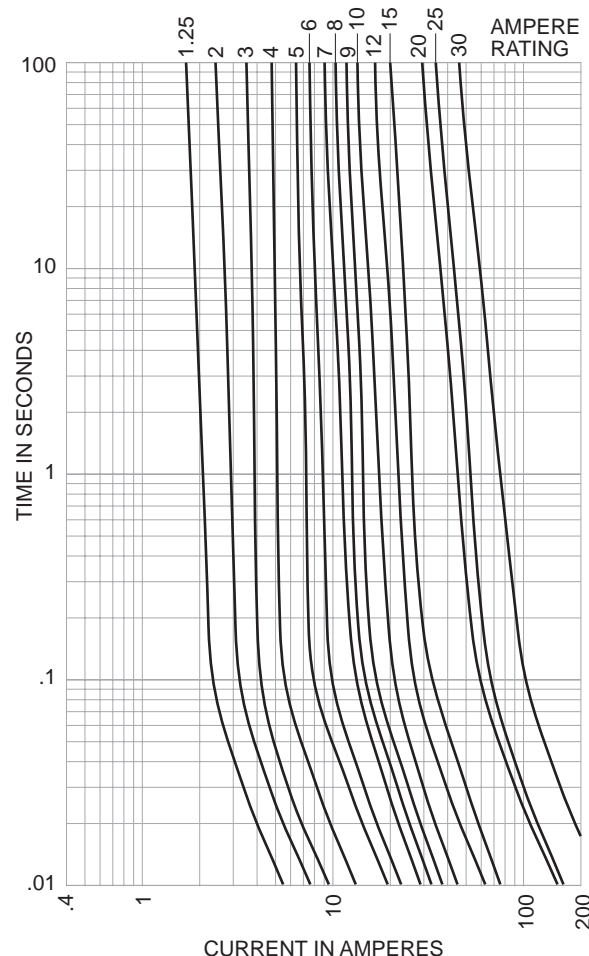

Catalog Symbol: GBB (3AG)

Very Fast-Acting

Ampere Rating: 1 Ampere

Agency Approvals:

U.L. Recognized, Std. 248-14

1-30A, 125 Vdc/250 Vac

Guide JFHR2, File E56412

CSA Certified, C22.2 No. 248.14

1-10A, 125 Vdc/250 Vac

Class 1422-01, File 53787

Construction: Ceramic Tube

Plated Brass Endcaps

Electrical Ratings (Catalog Symbol and Amperes)

U.L. Recognized

GBB-1	GBB-4	GBB-8	GBB-15
GBB-1 $\frac{1}{4}$	GBB-5	GBB-9	GBB-20
GBB-2	GBB-6	GBB-10	GBB-25
GBB-3	GBB-7	GBB-12	GBB-30

Carton Quantity and Weight

Ampere Ratings	Carton Qty.	Weight	
		Lbs.	Kg.
1-30	100	1.0	0.454

Packaging & Ordering Information:

Package Code Blank 5 in BK/ 100 in	GBB Product Symbol	V Lead Blank -no lead V-Axial lead	(See Table) Rated Current
--	-----------------------	---	------------------------------

General Information:

- Ceramic cartridge for protection of solid state devices.
- Mount in Bussmann HTB panel-mounted fuseholders, HFB in-line fuseholders, and Series 8000 fuseblocks.

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000 Vac, 75-1500 Vdc). Refer to BIF document #8002 or contact Bussmann Application Engineering at 314-527-1270 for more information.

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.