

Bus transceivers (3-State)

74F861*, 74F862*,
74F863, 74F864*

FEATURES

- Provide high performance bus interface buffering for wide data/address paths or buses carrying parity
- High impedance NPN base inputs for reduced loading (20µA in High and Low states)
- I_{IL} is 20µA vs. 1000µA for AM29861 series
- Buffered control inputs for light loading, or increased fan-in as required with MOS microprocessors
- Positive and negative over-shoots are clamped to ground
- 3-State outputs glitch free during power-up and power-down
- Slim dual in-line (DIP) 300mil package
- Broadside pinout compatible with AMD AM29861–29864
- Outputs sink 64mA

DESCRIPTION

The 74F861 series bus transceivers provide high performance bus interface buffering for wide data/address paths of buses carrying parity. The 74F863/864 9-bit bus transceivers have NOR-ed transmit and receive output enables for maximum control flexibility.

TYPE	TYPICAL PROPAGATION DELAY	TYPICAL SUPPLY CURRENT (TOTAL)
74F861, 74F862	6.0ns	150mA
74F863, 74F864	6.0ns	115mA


ORDERING INFORMATION

PACKAGES	COMMERCIAL RANGE $V_{CC} = 5V \pm 10\%$; $T_A = 0^\circ C$ to $+70^\circ C$	PKG DWG #
24-pin Plastic Slim Dual In-line (300mil) Package	74F863N	SOT222-1
24-pin Plastic Small Outline Large ¹	74F863D	SOT137-1


NOTE:

1. Thermal mounting techniques are recommended. See SMD Process Applications for a discussion of thermal considerations for surface mounted devices.


PIN CONFIGURATION

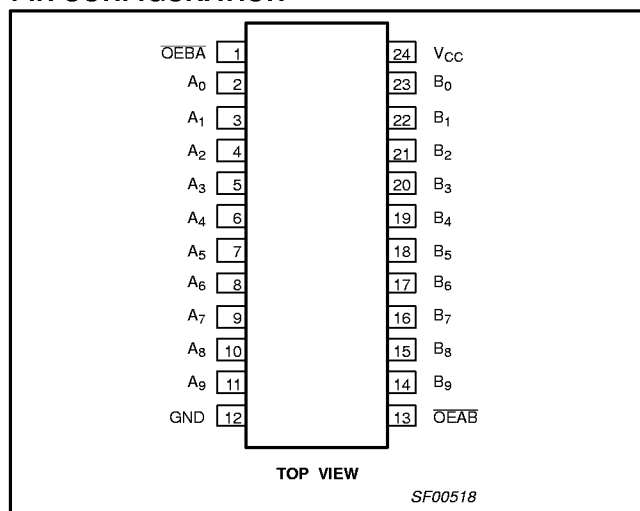

LOGIC SYMBOL

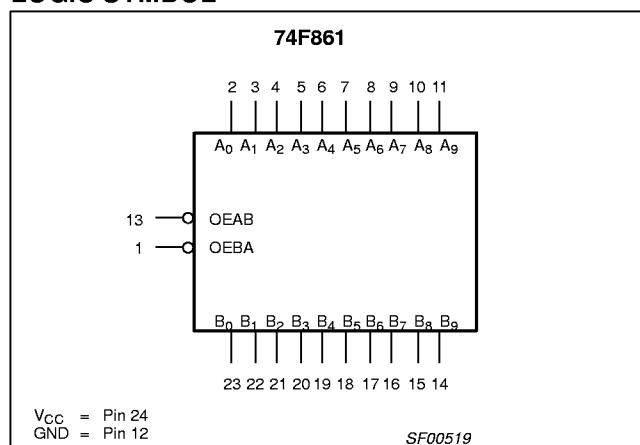


LOGIC SYMBOL (IEEE/IEC)

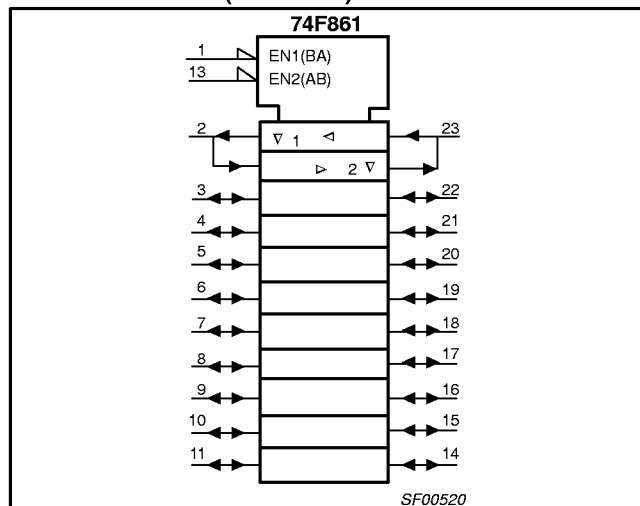


Bus transceivers (3-State)

74F861*, 74F862*,
74F863, 74F864*


PIN CONFIGURATION

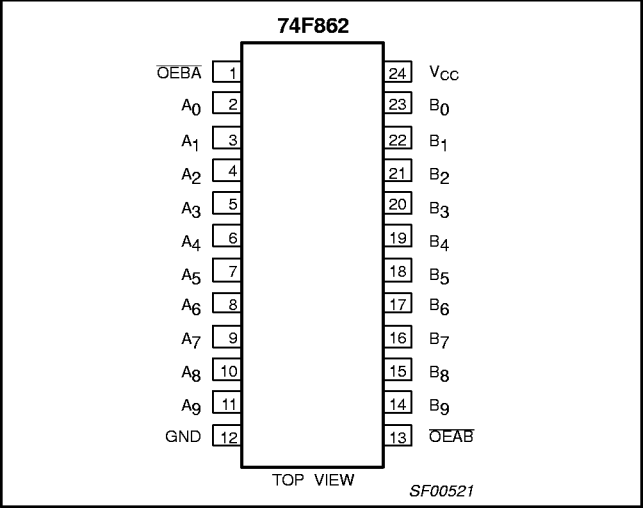


PIN CONFIGURATION

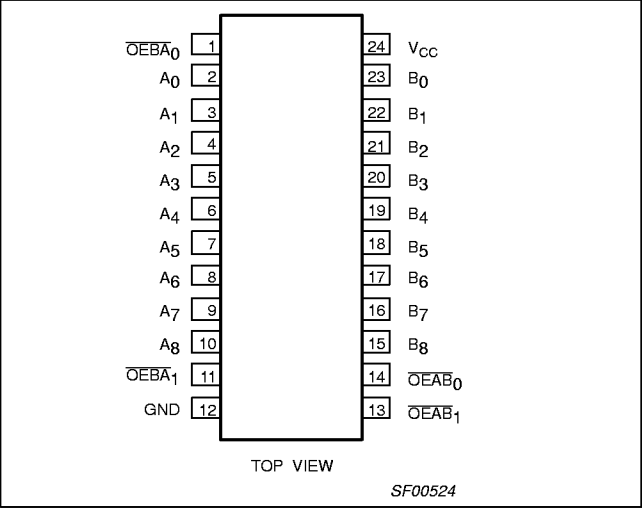


LOGIC SYMBOL

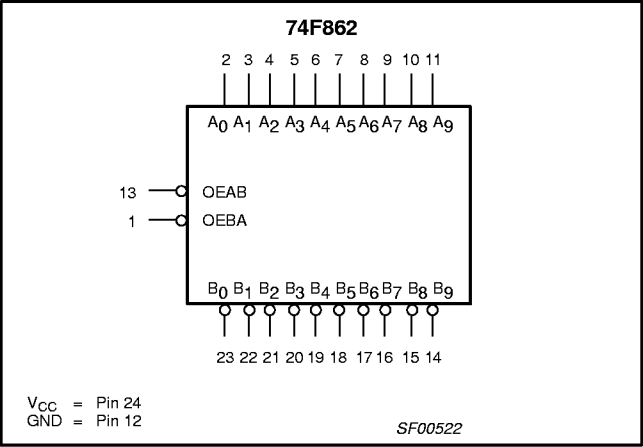


LOGIC SYMBOL

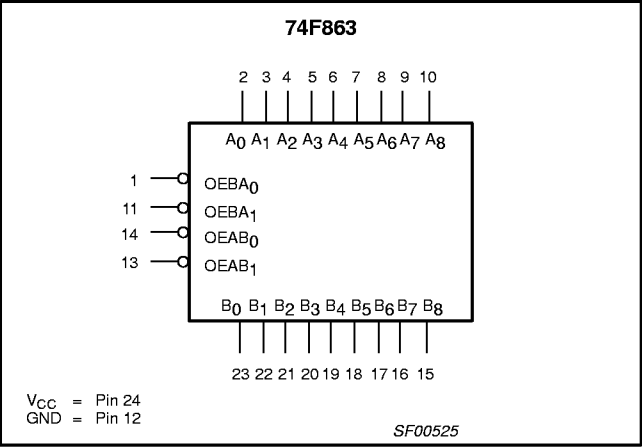

LOGIC SYMBOL (IEEE/IEC)

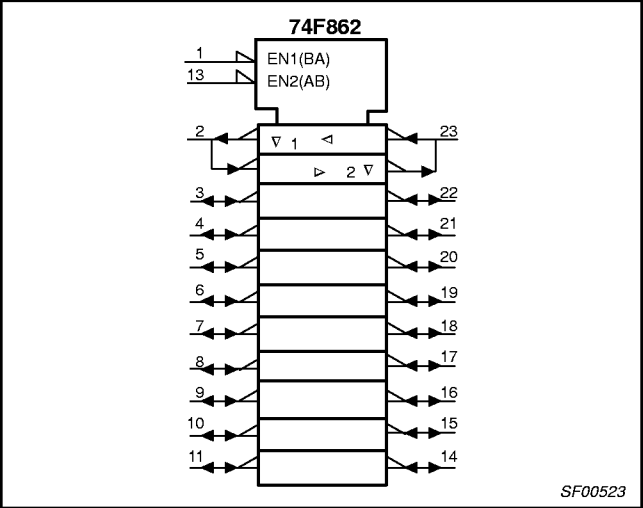

LOGIC SYMBOL (IEEE/IEC)

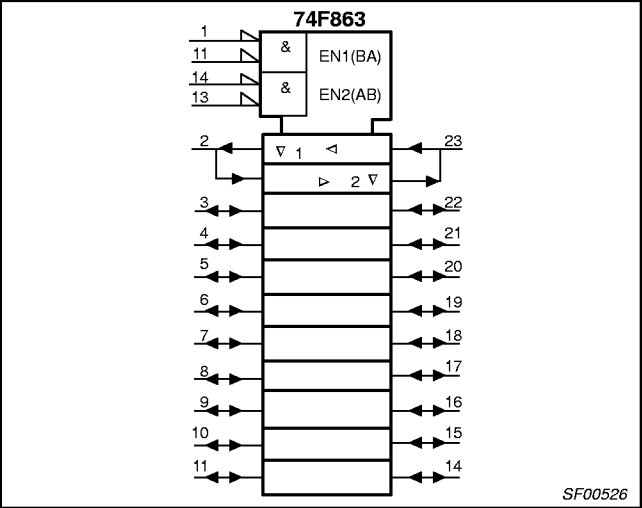


* Discontinued part. Please see the Discontinued Products List.


Bus transceivers (3-State)

74F861*, 74F862*,
74F863, 74F864*


PIN CONFIGURATION

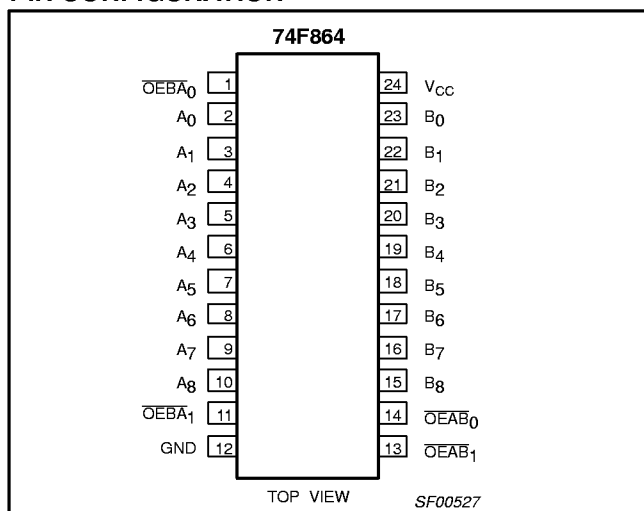





LOGIC SYMBOL

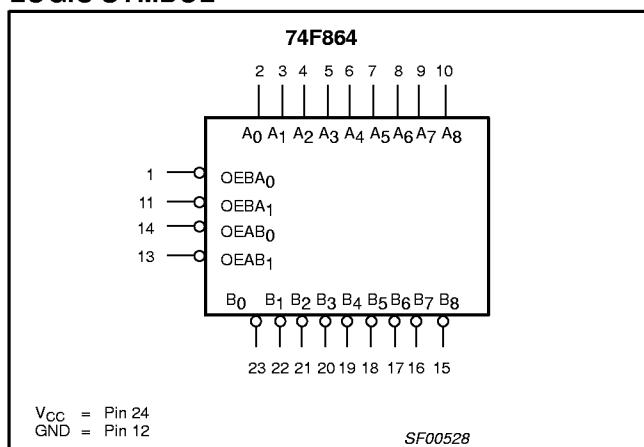

LOGIC SYMBOL (IEEE/IEC)

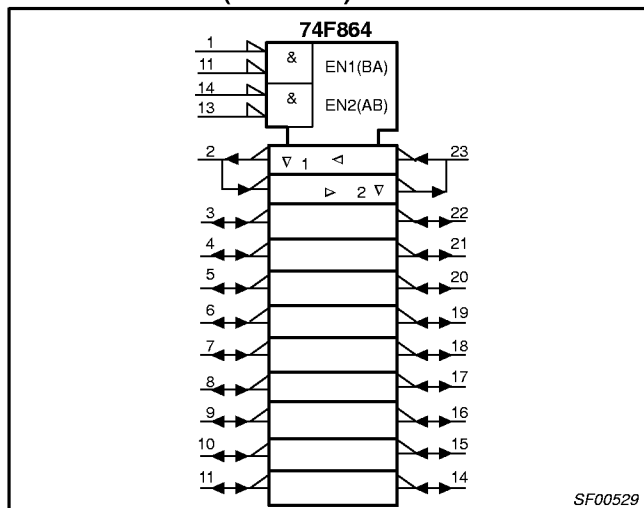

LOGIC DIAGRAM

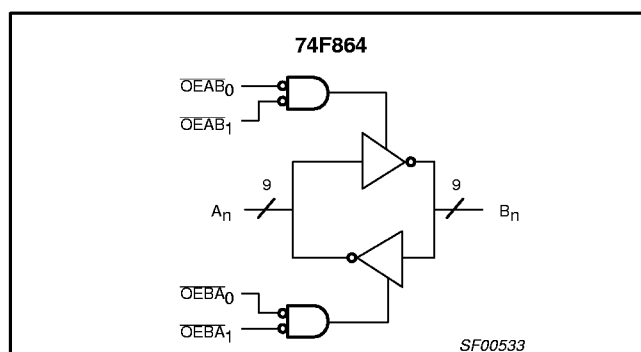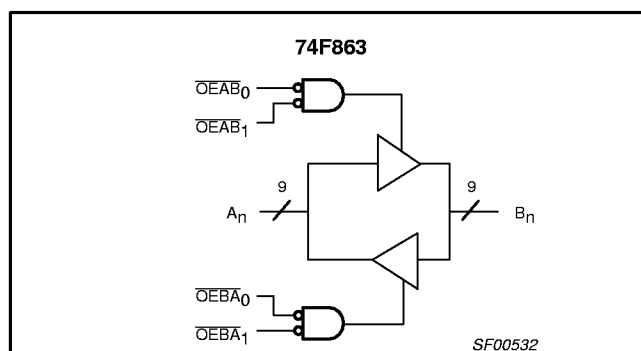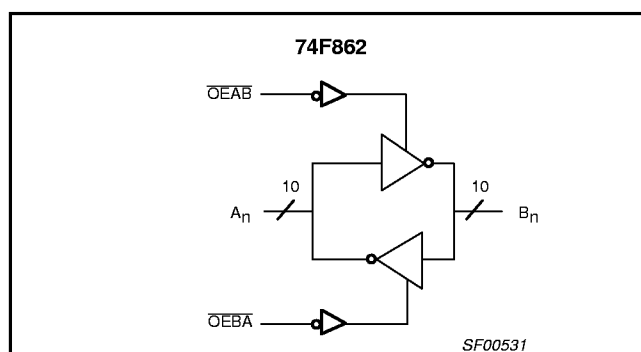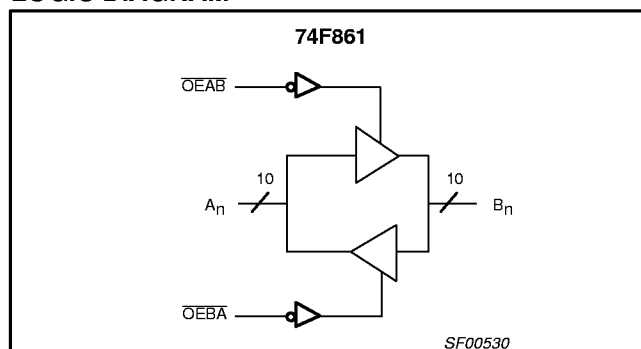

* Discontinued part. Please see the Discontinued Products List.

Bus transceivers (3-State)

74F861*, 74F862*,
74F863, 74F864*

INPUT AND OUTPUT LOADING AND FAN-OUT TABLE

PINS		DESCRIPTION	74F(U.L.) HIGH/LOW	LOAD VALUE HIGH/LOW
74F861 74F862	A ₀ – A ₉	Data transmit inputs	3.5/0.117	70µA/70µA
	B ₀ – B ₉	Data receive inputs	3.5/0.117	70µA/70µA
	\overline{OEBA}	Transmit output enable input	1.0/0.033	20µA/20µA
	\overline{OEAB}	Receive output enable input	1.0/0.033	20µA/20µA
	A ₀ – A ₉	Data transmit outputs	1200/106.7	24mA/64mA
	B ₀ – B ₉	Data receive outputs	1200/106.7	24mA/64mA
74F863 74F864	A ₀ – A ₉	Data transmit inputs	3.5/0.117	70µA/70µA
	B ₀ – B ₉	Data receive inputs	3.5/0.117	70µA/70µA
	\overline{OEBA}_n	Transmit output enable input	1.0/0.033	20µA/20µA
	\overline{OEAB}_n	Receive output enable input	1.0/0.033	20µA/20µA
	A ₀ – A ₉	Data transmit outputs	1200/106.7	24mA/64mA
	B ₀ – B ₉	Data receive outputs	1200/106.7	24mA/64mA

NOTE: One (1.0) FAST Unit Load is defined as: 20µA in the High state and 0.6mA in the Low state.

FUNCTION TABLE FOR 74F861 AND 74F862

INPUTS		OPERATING MODES	
\overline{OEAB}	\overline{OEBA}	74F861	74F862
L	H	A data to B bus	A data to B bus
H	L	B bus to A data	B bus to A data
H	H	Z	Z

H = High voltage level

L = Low voltage level

Z = High impedance "off" state

FUNCTION TABLE FOR 74F863 AND 74F864

INPUTS				OPERATING MODES	
\overline{OEAB}_0	\overline{OEAB}_1	\overline{OEBA}_0	\overline{OEBA}_1	74F863	74F864
L	L	H	X	A data to B bus	A data to B bus
L	L	X	H		
H	X	L	L	B bus to A data	B bus to A data
X	H	L	L		
H	H	H	H	Z	Z

H = High voltage level

L = Low voltage level

Z = High impedance "off" state

* Discontinued part. Please see the Discontinued Products List.

Bus transceivers (3-State)

74F861*, 74F862*,
74F863, 74F864***ABSOLUTE MAXIMUM RATINGS**

(Operation beyond the limits set forth in this table may impair the useful life of the device. Unless otherwise noted, these limits are over the operating free-air temperature range.)

SYMBOL	PARAMETER	RATING	UNIT
V_{CC}	Supply voltage	-0.5 to +7.0	V
V_{IN}	Input voltage	-0.5 to +7.0	V
I_{IN}	Input current	-30 to +5	mA
V_{OUT}	Voltage applied to output in High output state	-0.5 to +5.5	V
I_{OUT}	Current applied to output in Low output state	128	mA
T_A	Operating free-air temperature range	0 to +70	°C
T_{STG}	Storage temperature	-65 to +150	°C

RECOMMENDED OPERATING CONDITIONS

SYMBOL	PARAMETER	LIMITS			UNIT
		MIN	NOM	MAX	
V_{CC}	Supply voltage	4.5	5.0	5.5	V
V_{IH}	High-level input voltage	2.0			V
V_{IL}	Low-level input voltage			0.8	V
I_{IK}	Input clamp current			-18	mA
I_{OH}	High-level output current			-24	mA
I_{OL}	Low-level output current			64	mA
T_A	Operating free-air temperature range	0		70	°C

* Discontinued part. Please see the Discontinued Products List.

Bus transceivers (3-State)

74F861*, 74F862*,
74F863, 74F864*

DC ELECTRICAL CHARACTERISTICS

(Over recommended operating free-air temperature range unless otherwise noted.)

SYMBOL	PARAMETER		TEST CONDITIONS ¹			LIMITS			UNIT
						MIN	TYP ²	MAX	
V _{OH}	High-level output voltage		V _{CC} =MIN, V _{IL} =MAX, V _{IH} =MIN	I _{OH} =-15mA	±10%V _{CC}	2.4			V
					±5%V _{CC}	2.4	3.3		V
			V _{CC} =MIN, V _{IL} =MAX, V _{IH} =MIN	I _{OH} =-24mA	±10%V _{CC}	2.0			V
					±5%V _{CC}	2.0			V
V _{OL}	Low-level output voltage		V _{CC} =MIN, V _{IL} =MAX, V _{IH} =MIN	I _{OL} =-48mA	±10%V _{CC}		0.38	0.55	V
				I _{OL} =64mA	±5%V _{CC}		0.42	0.55	V
V _{IK}	Input clamp voltage		V _{CC} = MIN, I _I = I _{IK}				-0.73	-1.2	V
I _I	Input current at maximum input voltage	OEAB, OEBA OEAB _n , OEBA _n	V _{CC} = 0.0V, V _I = 7.0V					100	μA
		A _n , B _n	V _{CC} = 5.5V, V _I = 5.5V					1	mA
I _{IH}	High-level input current		V _{CC} = MAX, V _I = 2.7V					20	μA
I _{IL}	Low-level input current		V _{CC} = MAX, V _I = 0.5V					-20	μA
I _{IH} + I _{OZH}	Off-state output current High-level voltage applied	A _n , B _n	V _{CC} = MAX, V _O = 2.7V					70	μA
I _{IL} + I _{OZL}	Off-state output current Low-level voltage applied		V _{CC} = MAX, V _O = 0.5V					-70	μA
I _{OS}	Short-circuit output current ³		V _{CC} = MAX			-100		-225	mA
I _{CC}	A _n , B _n	74F861	I _{CCH}	V _{CC} = MAX			145	195	mA
		74F863	I _{CCL}				140	195	mA
		I _{CCZ}				165	220	mA	
	Supply current total	74F862	I _{CCH}	V _{CC} = MAX			90	130	mA
		74F864	I _{CCL}				120	170	mA
			I _{CCZ}				130	160	mA

NOTES:

- For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.
- All typical values are at V_{CC} = 5V, T_A = 25°C.
- Not more than one output should be shorted at a time. For testing I_{OS}, the use of high-speed test apparatus and/or sample-and-hold techniques are preferable in order to minimize internal heating and more accurately reflect operational values. Otherwise, prolonged shorting of a High output may raise the chip temperature well above normal and thereby cause invalid readings in other parameter tests. In any sequence of parameter tests, I_{OS} tests should be performed last.

Bus transceivers (3-State)

74F861*, 74F862*,
74F863, 74F864*

AC ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER	TEST CONDITION	74F861, 74F863					UNIT
			T _A = +25°C, V _{CC} = 5V C _L = 50pF, R _L = 500Ω			T _A = 0°C to +70°C V _{CC} = 5V ±10% C _L = 50pF, R _L = 500Ω		
			MIN	TYP	MAX	MIN	MAX	
t _{PLH} t _{PHL}	Propagation delay A _n or B _n	Waveform 1	4.0 3.0	6.0 5.0	9.0 8.0	3.5 2.5	10.0 9.0	ns
t _{PLH} t _{PHL}	Propagation delay B _n or A _n	Waveform 1	4.0 2.5	6.0 5.0	9.0 8.0	3.5 2.5	10.0 9.0	ns
t _{PZH} t _{PZL}	Output Enable time High or Low level $\overline{OE}B_n$ to A _n	Waveform 3 Waveform 4	6.0 4.0	8.0 6.0	11.5 10.0	5.0 4.0	13.0 11.0	ns
t _{PZH} t _{PZL}	Output Enable time High or Low level $\overline{OE}A_n$ to B _n	Waveform 3 Waveform 4	6.0 4.0	8.0 6.0	11.0 10.0	5.0 4.0	13.0 11.0	ns
t _{PHZ} t _{PLZ}	Output Disable time High or Low level $\overline{OE}B_n$ to A _n	Waveform 3 Waveform 4	3.5 2.5	5.5 5.0	9.0 8.5	3.0 2.0	9.5 9.5	ns
t _{PHZ} t _{PLZ}	Output Disable time High or Low level $\overline{OE}A_n$ to B _n	Waveform 3 Waveform 4	3.5 2.5	5.5 4.5	8.5 8.5	3.0 2.0	9.5 9.5	ns

AC ELECTRICAL CHARACTERISTICS


SYMBOL	PARAMETER	TEST CONDITION	74F862, 74F864					UNIT
			$T_A = +25^{\circ}\text{C}$, $V_{CC} = 5\text{V}$ $C_L = 50\text{pF}$, $R_L = 500\Omega$			$T_A = 0^{\circ}\text{C to } +70^{\circ}\text{C}$ $V_{CC} = 5\text{V} \pm 10\%$ $C_L = 50\text{pF}$, $R_L = 500\Omega$		
			MIN	TYP	MAX	MIN	MAX	
t_{PLH} t_{PHL}	Propagation delay A_n or B_n	Waveform 2	4.0 1.5	6.0 3.5	9.0 6.5	3.0 1.5	10.0 7.0	ns
t_{PLH} t_{PHL}	Propagation delay B_n or A_n	Waveform 2	4.0 1.5	6.0 3.5	9.0 6.5	3.5 1.5	10.0 7.0	ns
t_{PZH} t_{PZL}	Output Enable time High or Low level $\overline{OE}B_n$ to A_n	Waveform 3 Waveform 4	6.5 6.0	8.5 7.5	12.0 12.0	5.5 5.0	13.5 14.0	ns
t_{PZH} t_{PZL}	Output Enable time High or Low level $\overline{OE}A_n$ to B_n	Waveform 3 Waveform 4	6.5 6.0	8.5 7.5	12.0 12.0	5.5 5.0	13.5 14.0	ns
t_{PHZ} t_{PLZ}	Output Disable time High or Low level $\overline{OE}B_n$ to A_n	Waveform 3 Waveform 4	3.0 2.5	5.0 4.0	8.5 8.5	2.5 2.0	9.5 9.0	ns
t_{PHZ} t_{PLZ}	Output Disable time High or Low level $\overline{OE}A_n$ to B_n	Waveform 3 Waveform 4	3.0 2.5	5.0 4.0	8.5 8.5	2.5 2.0	9.5 9.0	ns

* Discontinued part. Please see the Discontinued Products List.


Bus transceivers (3-State)

74F861*, 74F862*,
74F863, 74F864*

AC WAVEFORMS

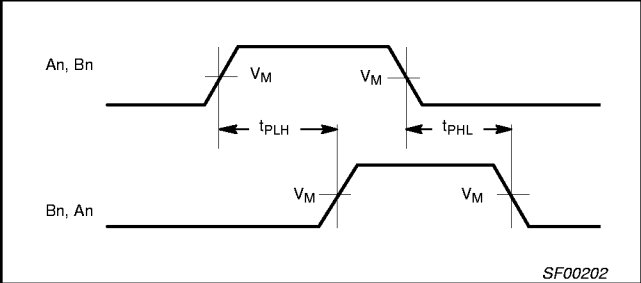


Waveform 1 . Propagation Delay for Non-inverting Output

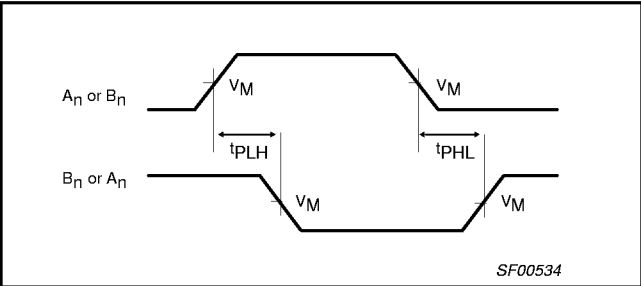


Waveform 2 . Propagation Delay for Inverting Output

NOTE: For all waveforms, $V_M = 1.5V$.

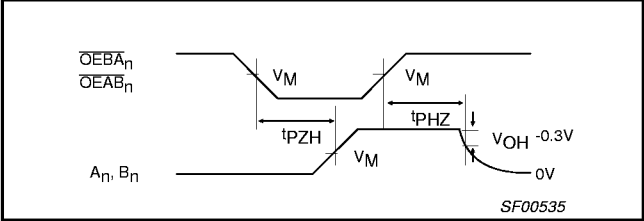


Waveform 3 . 3-State Output Enable Time to High Level and Output Disable Time from High Level

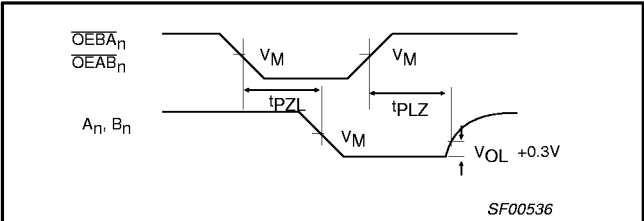

Waveform 4 . 3-State Output Enable Time to Low Level and Output Disable Time from Low Level

TEST CIRCUITS AND WAVEFORMS

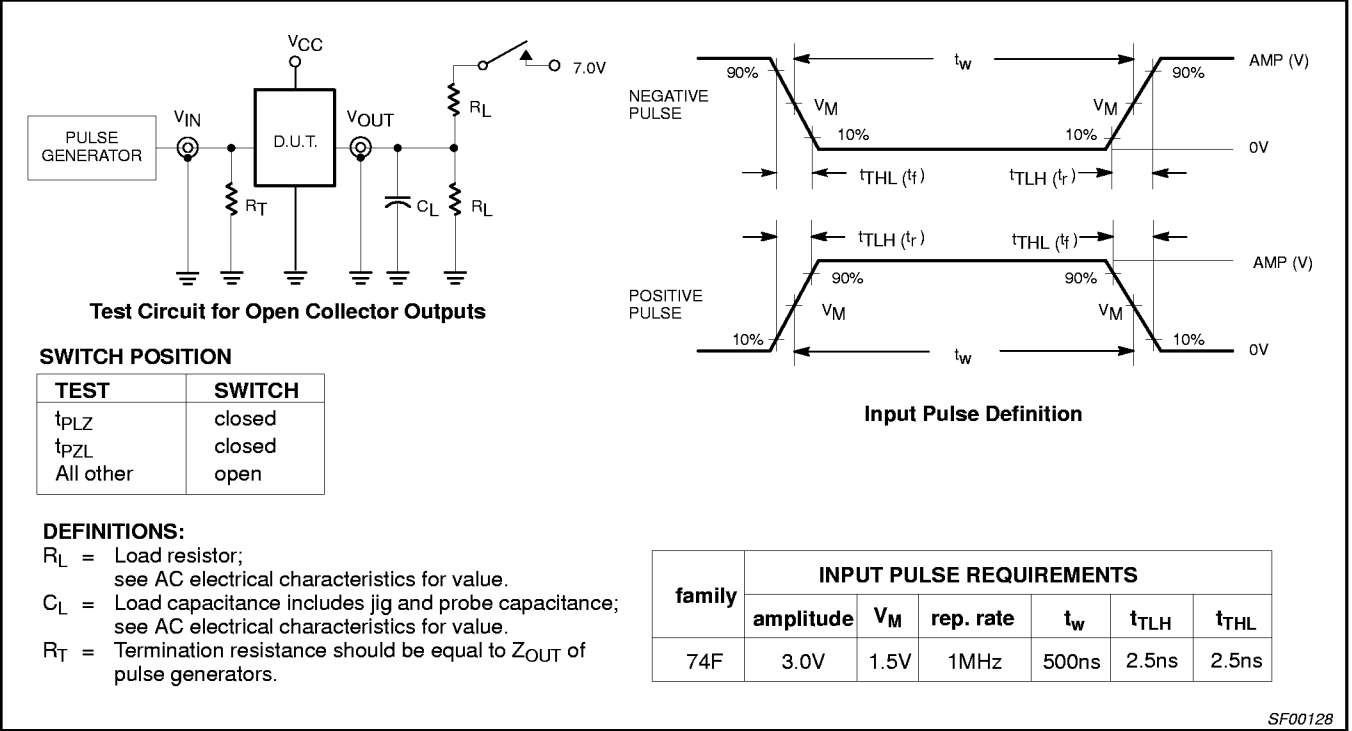


* Discontinued part. Please see the Discontinued Products List.

Bus transceivers (3-State)

74F861*, 74F862*,
74F863, 74F864*

DIP24: plastic dual in-line package; 24 leads (300 mil)


SOT222-1

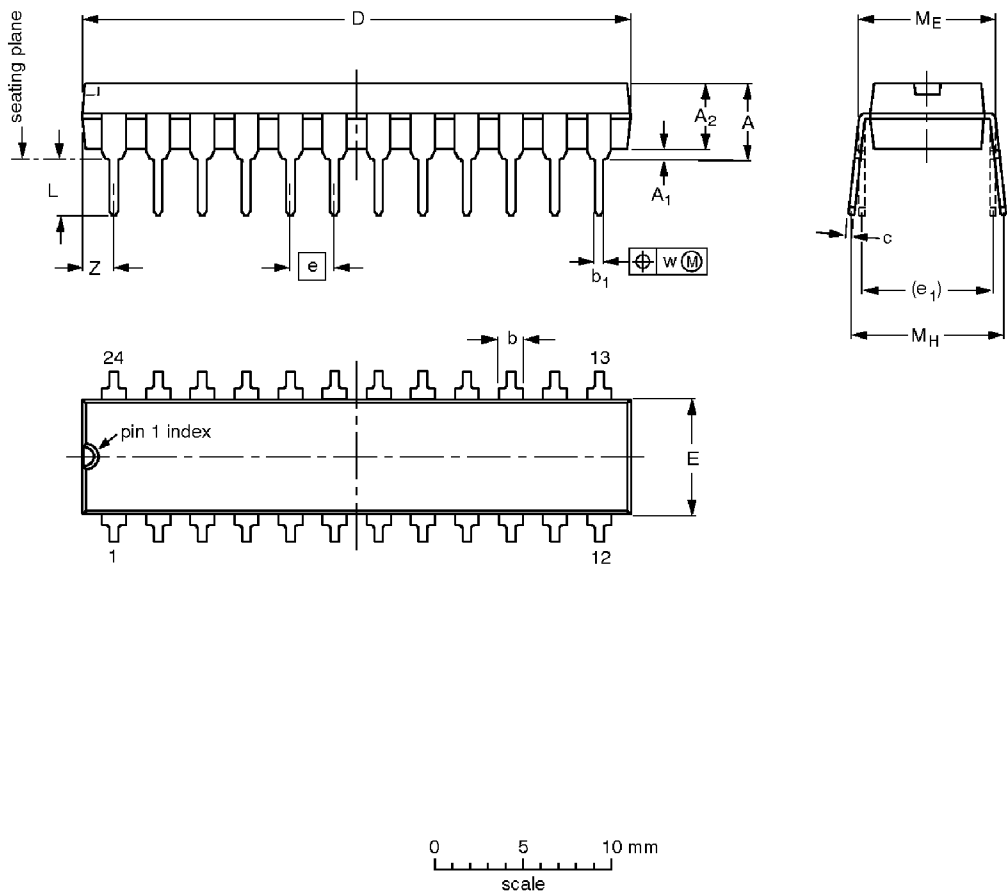

DIMENSIONS (millimetre dimensions are derived from the original inch dimensions)

UNIT	A max.	A ₁ min.	A ₂ max.	b	b ₁	c	D ⁽¹⁾	E ⁽¹⁾	e	e ₁	L	M _E	M _H	w	Z ⁽¹⁾ max.
mm	4.70	0.38	3.94	1.63 1.14	0.56 0.43	0.36 0.25	31.9 31.5	6.73 6.48	2.54	7.62	3.51 3.05	8.13 7.62	10.03 7.62	0.25	2.05
inches	0.185	0.015	0.155	0.064 0.045	0.022 0.017	0.014 0.010	1.256 1.240	0.265 0.255	0.100	0.300	0.138 0.120	0.32 0.30	0.395 0.300	0.01	0.081

Note
1. Plastic or metal protrusions of 0.01 inches maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT222-1		MS-001AF				95-03-11


* Discontinued part. Please see the Discontinued Product List..

Bus transceivers (3-State)

74F861*, 74F862*,
74F863, 74F864*

SO24: plastic small outline package; 24 leads; body width 7.5 mm

SOT137-1

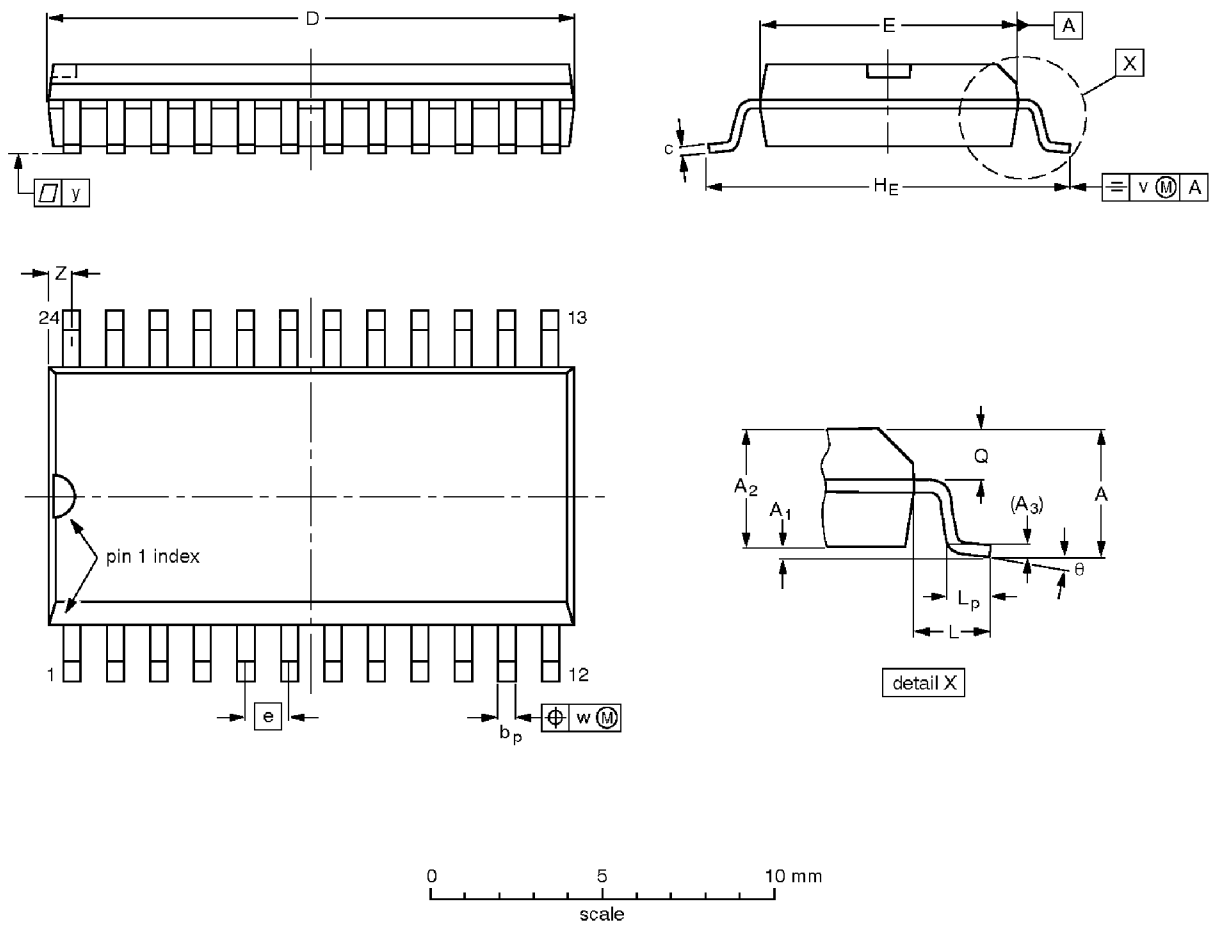

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A ₁	A ₂	A ₃	b _p	c	D ⁽¹⁾	E ⁽¹⁾	e	H _E	L	L _p	Q	v	w	y	Z ⁽¹⁾	θ
mm	2.65	0.30 0.10	2.45 2.25	0.25	0.49 0.36	0.32 0.23	15.6 15.2	7.6 7.4	1.27	10.65 10.00	1.4	1.1 0.4	1.1 1.0	0.25	0.25	0.1	0.9 0.4	8° 0°
inches	0.10	0.012 0.004	0.096 0.089	0.01	0.019 0.014	0.013 0.009	0.61 0.60	0.30 0.29	0.050	0.419 0.394	0.055	0.043 0.016	0.043 0.039	0.01	0.01	0.004	0.035 0.016	

Note

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT137-1	075E05	MS-013AD				95-01-24 97-05-22

* Discontinued part. Please see the Discontinued Product List..

Bus transceivers (3-State)

74F861*, 74F862*,
74F863, 74F864*

Data sheet status

Data sheet status	Product status	Definition [1]
Objective specification	Development	This data sheet contains the design target or goal specifications for product development. Specification may change in any manner without notice.
Preliminary specification	Qualification	This data sheet contains preliminary data, and supplementary data will be published at a later date. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

[1] Please consult the most recently issued datasheet before initiating or completing a design.

Definitions

Short-form specification — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Disclaimers

Life support — These products are not designed for use in life support appliances, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

Philips Semiconductors
811 East Arques Avenue
P.O. Box 3409
Sunnyvale, California 94088-3409
Telephone 800-234-7381

© Copyright Philips Electronics North America Corporation 1998
All rights reserved. Printed in U.S.A.

print code

Date of release: 10-98

Document order number:

9397-750-05189

* Discontinued part. Please see the Discontinued Product List.

Let's make things better.