


Industry Smallest and Low Profile 3W 1000mA DC/DC Buck Converter with High Output Density Power

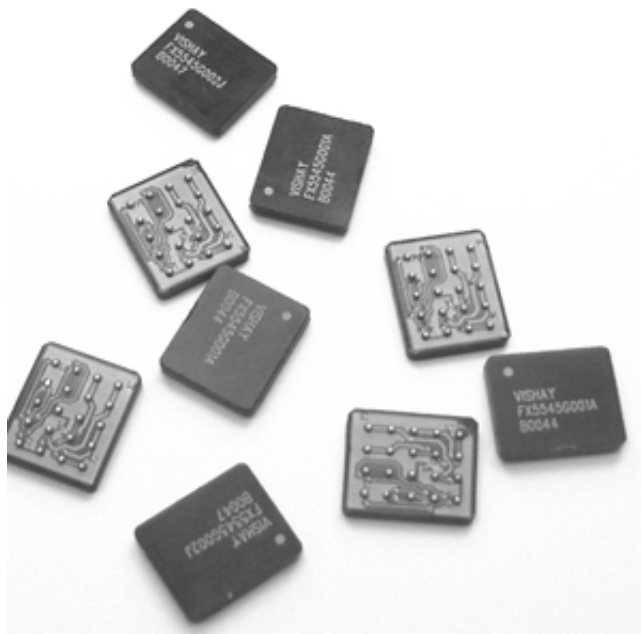

FEATURES

- Fully integrated DC/DC converter
- High efficiency over large load range
- 2MHz switching frequency
- 100% duty cycle
- Power density - more than 100W/inch³
- 1uA shutdown current
- 2.7V to 6V input range (1Li+ and 3-cell NiCd or NiMH cells)
- 1.5V to 3.6V output voltage
- Programmable PWM/PSM controls
- Low output ripple
- BGA/LGA construction
- Temperature range: - 40°C to + 85°C
- No external components needed
- Output power 3W
- Maximum current 1.0A
- Low profile

The DC/DC converter provides fully integrated synchronous buck converter solution for the latest one-cell lithium ion cellular phones. Its input voltage is between 2.7V to 6V, capable of delivering up to 1000mA of output current at 1.5V to 3.6V. The DC/DC converter combines the 2MHz-switching controller with fully integrated passive components needed to deliver the smallest and most efficient converter available today. The high switching frequency minimizes the output capacitance with peak to peak output ripple as low as 25mV. The DC/DC converter delivers efficiency up to 95%. The programmable pulse-skipping mode (PSM) maintains this high efficiency even during the standby and idle modes to increase overall battery life and talktime. In order to extract the last ounce of power from the battery, the DC/DC converter is designed with 100% duty cycle control for this mode. This function enables the DC/DC converter to operate like a saturated linear regulator delivering the highest potential

output voltage for longer talk time.

The DC/DC converter is available in 20-ports BGA package. In order to satisfy the stringent ambient temperature requirements, the DC/DC converter is designed to handle the industrial temperature range of - 40°C to + 85°C.


APPLICATION

- Cordless phones, PDAs and others
- Supply voltage source for low-voltage chip sets
- Portable computers
- Battery back-up supplies
- Cameras
- Routers
- Fiber optics
- LANS
- Image processing


ORDERING INFORMATION

	FX	5545	G201	☐	☐	☐	☐	☐
FUNCTION								
SIZE								
CIRCUIT IDENTIFIER								
OUTPUT VOLTAGE-Example: 2.7V should be written as 2V7 as the V indicates the decimal point, or ADJ for adjustable version - self selectable output voltage.								
PACKAGING-B1 = 10pcs in bulk; B5 = 50pcs in bulk; T1 = 13" reel; T2 = 7" reel.								

DIMENSIONS in inches [millimeters]	
L	0.58 ± 0.01 [14.7 $\pm$ 0.25]
W	0.48 ± 0.01 [12.2 $\pm$ 0.25]
A	0.1 ± 0.01 [2.54 $\pm$ 0.25]
B	0.09 ± 0.01 [2.29 $\pm$ 0.25]
C	0.09 ± 0.01 [2.27 $\pm$ 0.25]
T	0.12 max [3 max]

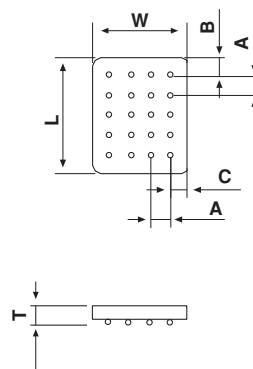

BOTTOM SIDE




Marked on Upper Side

*Note: Pin Description application note is available on page 32.

PIN CONFIGURATION*

PIN	CONNECTION
1, 2	$\overline{SD}$
3, 7	SYNC
4, 8	N/C
5, 9	Vin
6, 10	PWM/PSM
11, 12	N/C
13, 17	GND
14, 18	Vout
15, 19	N/C
16, 20	GND

RECOMMENDED PAD PATTERN in inches [millimeters]		
A	D	F
0.1 ± 0.01 [2.54 $\pm$ 0.25]	0.03 ± 0.001 [0.8 $\pm$ 0.02]	0.02 ± 0.001 [0.5 $\pm$ 0.02]






TAPE AND REEL

See Tape and Reel Information - Type B

**STANDARD ELECTRICAL SPECIFICATIONS**

PARAMETER	UNIT	CONDITION	MIN	TYP	MAX
Input Voltage Range	V_{DC}		2.7		6
Insulation Test Voltage Resistance Leakage Current	V_{AC} Ω nA	60Hz 60sec $V_{ISO} = 500V_{DC}$ $V_{ISO} = 500V_{DC}$	750 1×10^{11}		5
Output Power Voltage Voltage Tolerance Temp. Coefficient Ripple and Noise	W V_{DC} % %/°C mVpp	at 25°C Ambient Temperature DC to 20MHz	- 5	3 1.5 to 3.6 35	+ 5 0.03
General Switching Frequency Package Weight	MHz gr.			2	1.5
Temperature Operation Storage	°C °C		- 40 - 55		+ 85 + 125

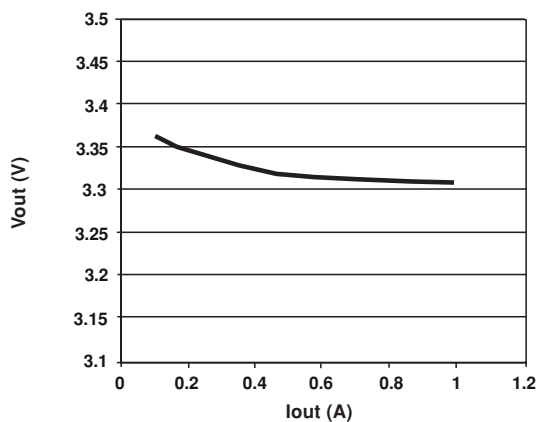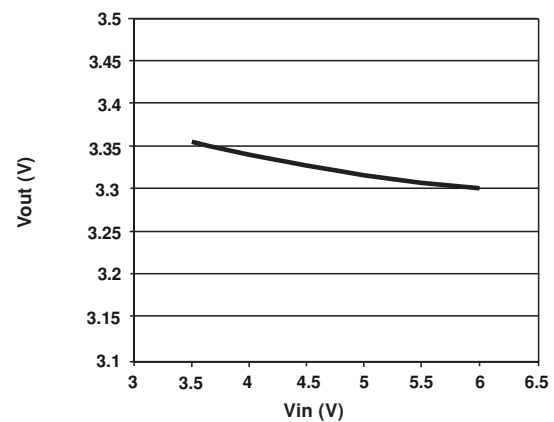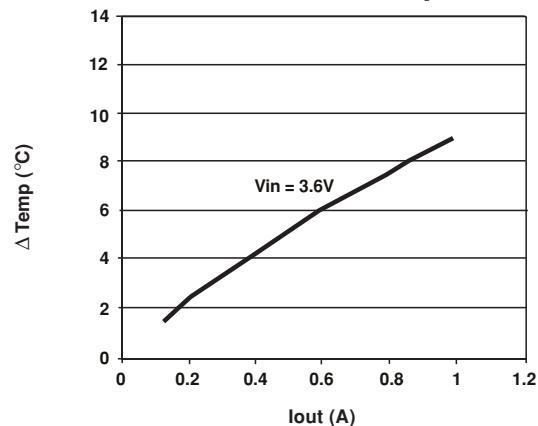Vout Vs. Iout
Vin = 3.6V**Vout Vs. Vin**
Iout = 600mA**Δ Temp. Vs. Iout**
Above 25°C Ambient Temperature**Efficiency Vs. Iout**
Vin = 3.6V; Vout = 3.3V