




Semiconductor Fuse 35-800A, 250 Volts

BIF Document

359

Size

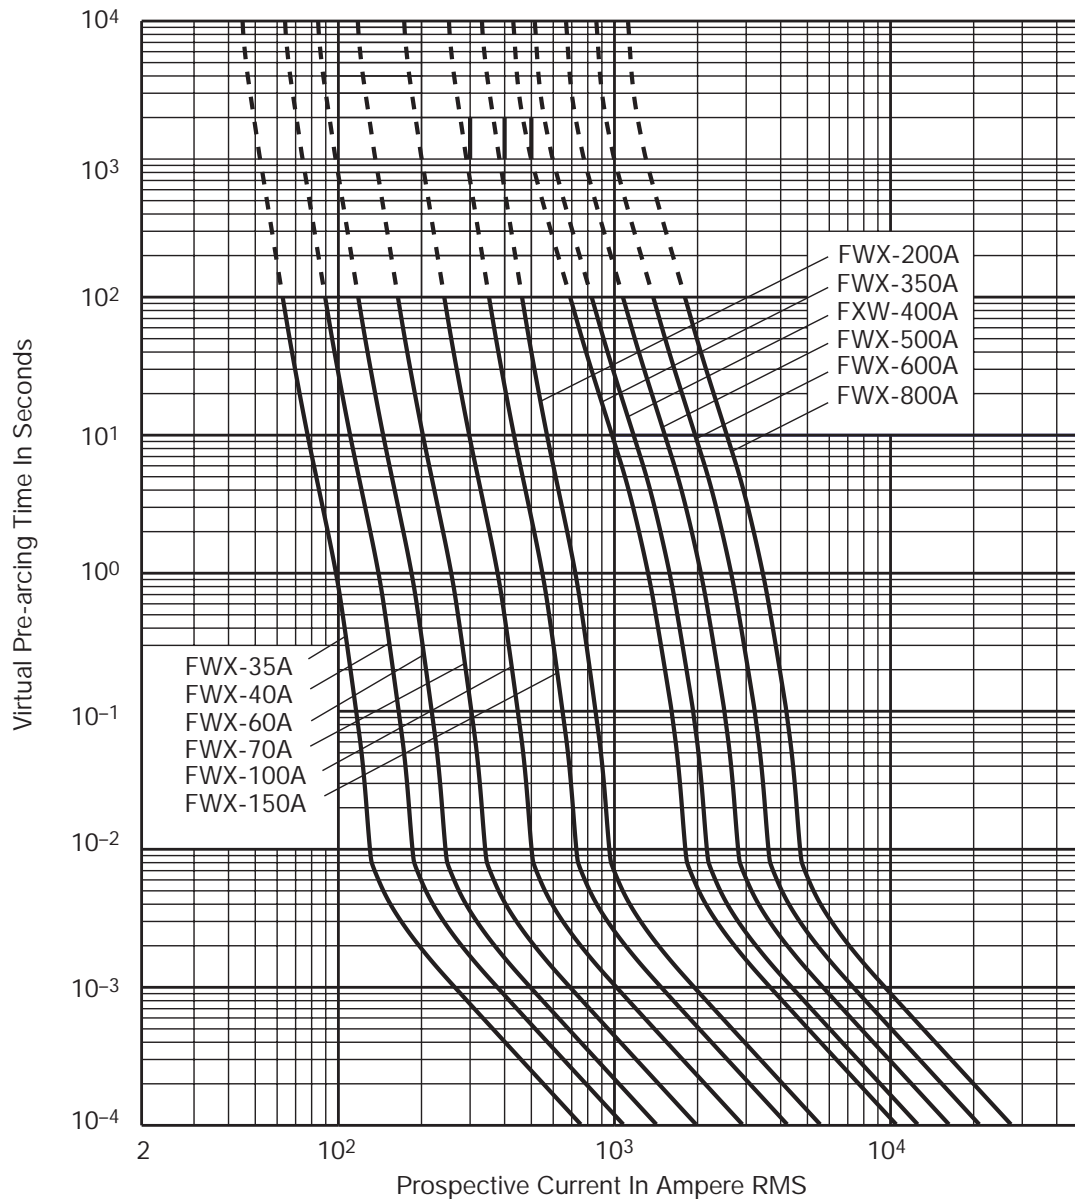

Minimum Melting

Time-Current Characteristic Curves

FWX 35A-800A

Approved: **HF**

Page **1 of 2**

Rev. Date: **OCT-97**

Pub. Date: **JAN-98**

COOPER Bussmann
12-28-98
SB98107 Rev. A

BUSSMANN
P.O. Box 14460
St. Louis, MO 63178-4460
U.S.A.
Phone: 314-394-2877
Fax: 800-544-2570
Int'l Fax: 314-527-1413

BUSSMANN U.K.
Burton-on-the-Wolds
Leicestershire LE12 5TH
England
Phone: 44-1509-882737
Fax: 44-1509-882786

BUSSMANN DENMARK
5 Litterbuen
DK-2740 Skovlunde
Copenhagen, Denmark
Phone: 45-4485-0900
Fax: 45-4485-0901

Bussmann reserves the right without notice to change design and/or discontinue distribution of this product.




Semiconductor Fuse 35-800A, 250 Volts

BIF Document

353

Size

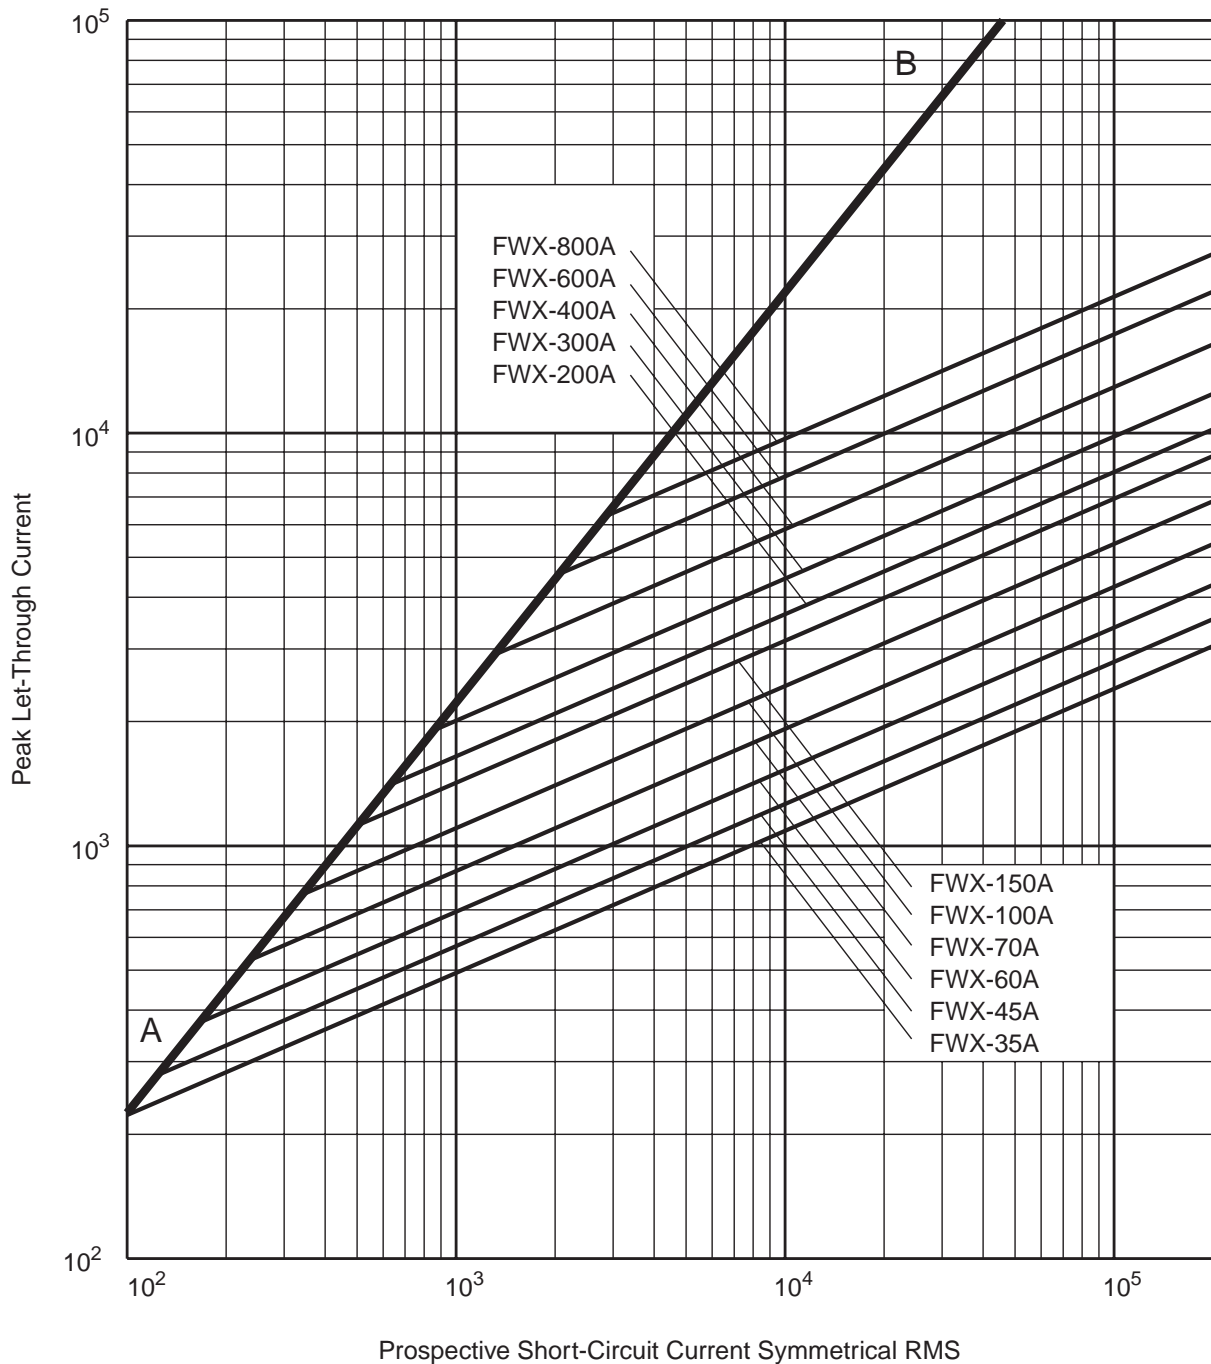

Peak Let-Through

Cut-Off Current Characteristic Curves

FWX 35A-800A

Approved: **JS**

Rev. Date: **SEPT-94**

Page **2 of 2**

Pub. Date: **NOV-94**