
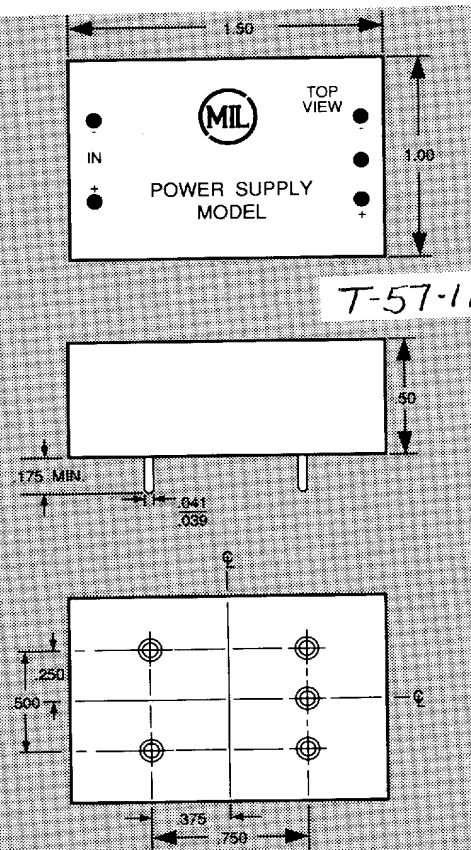


SERIES N

- 200 VOLT DC SOURCE TO DRIVE COLD CATHODE NUMERIC READOUT TUBES
- PC PLUG IN PACKAGE
- 3/4 CUBIC INCH
- OPERATE 3 TO 4 TUBES
- ISOLATED OUTPUT

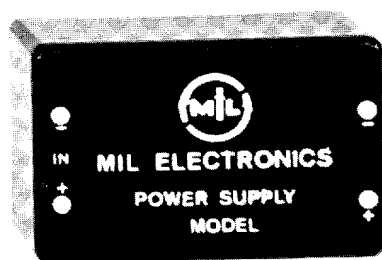

CENTER OUTPUT TERMINAL INSTALLED BUT NOT CONNECTED.

ELECTRICAL SPECIFICATIONS

INPUT VOLTS	MODEL NUMBER	TYPICAL INPUT CURRENT	OUTPUT VOLTS	OUTPUT CURRENT	OUTPUT RIPPLE	OUTPUT RESISTANCE
5	N5	750 mA	200 VDC	12 milliamps	10 VPP	1200 OHMS
6	N6	650 mA				
12	N12	300 mA				
24	N24	150 mA				
28	N28	125 mA				

PHYSICAL SPECIFICATIONS

Weight.....	20 gms	Mounting.....	5 printed circuit pins
Acceleration.....	45 G's	Terminals.....	Printed circuit pins
Shock.....	50 G's	Case, Finish.....	Diallyl phthalate, black
Vibration.....	20 G's	Volume.....	.75 cubic inches
Altitude.....	Sea level to space	Semiconductors.....	All silicon
Temp.....	-20 to +85°C	Encapsulation.....	100%

**F.O.B. FACTORY
NET 30 DAYS**