

MX584

Features

- ◆ **Programmable Outputs of:**
+10.0V, +7.5V, +5.0V, +2.5V
- ◆ **±5mV Tolerance at +10V (MX584L)**
- ◆ **Low Tempco: 5ppm/°C Max. (MX584L)**
- ◆ **No External Components or Trims**
- ◆ **Short Circuit Proof**
- ◆ **Output Sources and Sinks Current**
- ◆ **10mA Output Current**


Ordering Information

PART	TEMP. RANGE	PACKAGE*	ERROR
MX584JH	0°C to +70°C	TO-99 Can	±30mV
MX584KH	0°C to +70°C	TO-99 Can	±10mV
MX584LH	0°C to +70°C	TO-99 Can	±5mV
MX584JN	0°C to +70°C	Plastic DIP	±30mV
MX584KN	0°C to +70°C	Plastic DIP	±10mV
MX584LN	0°C to +70°C	Plastic DIP	±5mV
MX584JCSA	0°C to +70°C	Small Outline	±30mV
MX584KCSA	0°C to +70°C	Small Outline	±10mV
MX584LCSA	0°C to +70°C	Small Outline	±5mV
MX584JC/D	0°C to +70°C	Dice	±30mV
MX584SH	-55°C to +125°C	TO-99	±30mV
MX584TH	-55°C to +125°C	TO-99	±10mV
MX584SQ	-55°C to +125°C	CERDIP	±30mV
MX584TQ	-55°C to +125°C	CERDIP	±10mV

Applications

CMOS DAC Reference
A/D Converter Reference
Measurement Instrumentation
Data Loggers
Precision Analog Systems
Programmable Offset for PGAs

Typical Operating Circuit

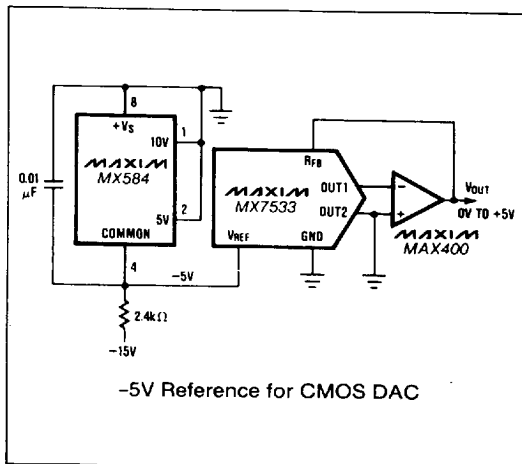**MAXIM**

Maxim Integrated Products 1

Call toll free 1-800-998-8800 for free samples or literature.

Pin Programmable Precision Voltage Reference

ABSOLUTE MAXIMUM RATINGS

Input Voltage V_{IN} to Common -0.3V, +40V
Power Dissipation	
Metal Can (Derate 6.7mW/ above +60°C) 600mW
CERDIP (Derate 8mW/ above +75°C) 600mW
Plastic DIP (Derate 6mW/ above +75°C) 450mW
Small Outline (Derate 5.3mW/ above +75°C) 400mW
Output Short-Circuit Duration (Note 1) Indefinite
Operating Temperature Range	
Commercial (J, K, L) 0°C to +70°C
Military (S, T, U) -55°C to +125°C

Storage Temperature Range -65°C to +150°C
Lead Temperature (Soldering 10sec) +300°C
Die Junction Temperature (T_J) -55°C to +150°C
Thermal Resistance, Junction to Ambient	
Metal Can 150°C/W
CERDIP 125°C/W
Plastic DIP 160°C/W
Small Outline 170°C/W

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

($V_{IN} = +15V$, $T_A = +25^\circ C$, unless otherwise noted)

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Output Voltage Tolerance		$I_L = 0mA$, At Pin 1			$V_{OUT} = +10V$, MX584J/S MX584K/T MX584L	± 30 ± 10 ± 5
					$V_{OUT} = +7.5V$, MX584J/S MX584K/T MX584L	± 22 ± 8 ± 4
					$V_{OUT} = +5.0V$, MX584J/S MX584K/T MX584L	± 15 ± 6 ± 3
					$V_{OUT} = +2.5V$, MX584J/S MX584K/T MX584L	± 7.5 ± 3.5 ± 2.5
Output Voltage Temperature Coefficient					MX584L, +10V, +7.5V, +5V Out +2.5V Out	5 10
					MX584J/S, All Outputs	30
					MX584K, All Outputs	15
					MX584T, +10V, +7.5V, +5V Out +2.5V Out	15 20
Differential Tempco Between Outputs		MX584K/L/T MX584J/S		3 5		ppm/ $^\circ C$
Quiescent Supply Current	I_Q	$I_L = 0mA$		750	1000	μA
Quiescent Current Tempco				1.5		μA / $^\circ C$
Turn-on Settling Time	t_{ON}	To $\pm 1\%$		200		μs
Noise	e_{NP-P}	0.1Hz to 10Hz		50		μV_{P-P}
Long-Term Stability		(Non-Cumulative)		25		ppm/kHrs
Short Circuit Current	I_{SC}			30		mA
Line Regulation		No Load, ($V_{OUT} + 2.5V$) < V_{IN} < +15V +15V < V_{IN} < +30V		0.005 0.002		% V
Load Regulation		$I_L = 0mA$ to 5mA		20	50	ppm/mA
Output Current	Source	I_L $V_{IN} > V_{OUT} + 2.5V$	$T_A = +25^\circ C$ T_{MIN} to T_{MAX}	10 5		mA
	Sink		T_{MIN} to T_{MAX} , MX584J/K/L MX584S/T -55°C to +85°C, MX584S/T	5 0.2 5		


Note 1: Absolute Maximum power dissipation must not be exceeded.

Pin Programmable Precision Voltage Reference


Typical Operating Characteristics

MX584


TYPICAL TEMPERATURE CHARACTERISTICS

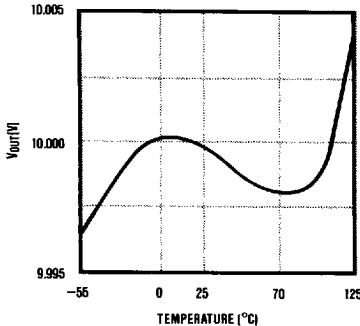

SPECTRAL NOISE DENSITY AND RMS NOISE vs. FREQUENCY



OUTPUT VOLTAGE vs. SINK AND SOURCE CURRENT

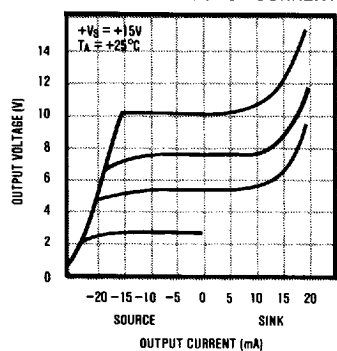

POWER-ON SETTLING CHARACTERISTICS

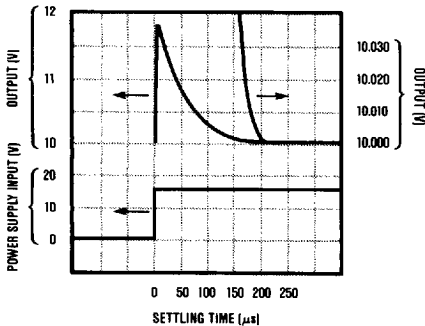


Table 1. Programming Pin Connections

OUTPUT VOLTAGE	PROGRAMMING (OUTPUT ON PIN 1)
10V	Pins 2 and 3 are unconnected.
7.5V	Connect pins 2 and 3 together.
5.0V	Connect pins 2 and 1 together.
2.5V	Connect pins 3 and 1 together.

Detailed Description

As shown in Figure 1, most applications of the MX584 require no external components. Connections to $+V_S$ and COMMON (COMMON is also tied to the case in the TO-99 metal package) with all other pins unconnected result in a buffered +10.00V output at pin 1. The other pretrimmed voltages are obtained by strapping pins as shown in Table 1. If one or more external buffer amplifiers are connected to the programming pins (pin 2,3), multiple outputs can be obtained from one reference.

Other Output Voltages

The MX584 can be adjusted to a different output voltage by adding one or more resistors as in Figure 2. As the diagram shows, the reference can be thought of as a 1.215V band-gap followed by a noninverting amplifier. If R1 and R2 are used alone, the adjustment range is widest but the resolution of the trim may be too coarse, even when a multi-turn trim pot is used.

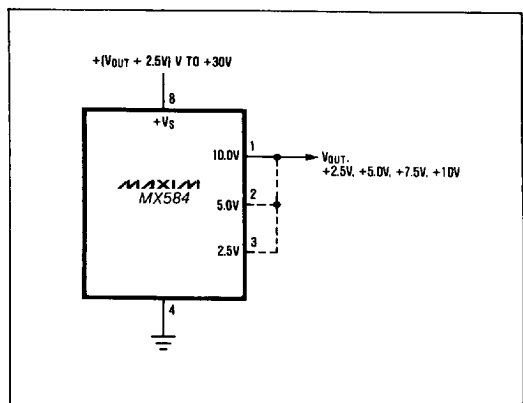


Figure 1. Basic Connection for Positive Outputs

MAXIM

5876651 0015048 T38

Pin Programmable Precision Voltage Reference

When adding external resistors, output voltages well above 10V can be obtained. R2 should therefore be chosen carefully since it sets the maximum output voltage. R2's resistance should not be so low as to jeopardize other circuits if R1 is misadjusted.

The fixed output voltages can also be varied by connecting only one resistor, as in the dashed lines in Figure 2. Connecting R3 alone raises V_{OUT} while R4 alone lowers it. These resistors (or potentiometers) must have very low temperature coefficients if accuracy over temperature is to be unaffected by the adjustment.

If fine adjustment of the output is all that is required, the circuit of Figure 3 is recommended. It provides good stability and resolution for a trim range of $\pm 200\text{mV}$. If the 2.5V output is adjusted, R2 should be connected to V_{BG} , pin 6, and the trim range should be limited to $\pm 100\text{mV}$.

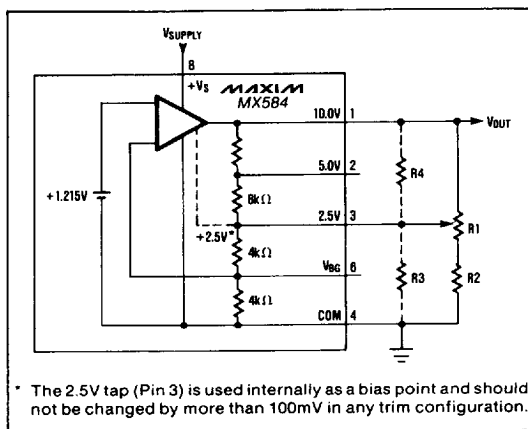


Figure 2. Variable Output Options

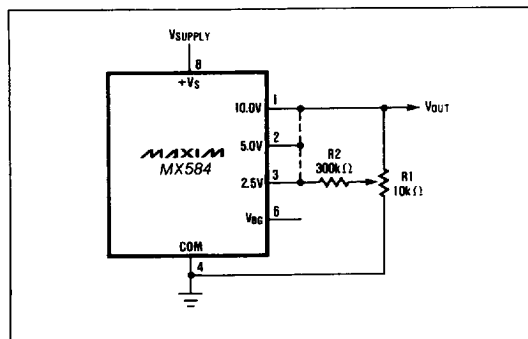


Figure 3. Fine Adjustment of Output Voltage ($\pm 200\text{mV}$)

Voltage Temperature Coefficient

The temperature characteristic of the MX584 consistently follows an "S-curve" as shown in the Typical Characteristics. A five-point 100% test guarantees compliance with -55°C to $+125^{\circ}\text{C}$ specifications and a three-point 100% test guarantees the 0°C to $+70^{\circ}\text{C}$ specifications.

The tolerance specifications in the Electrical Characteristics table state the maximum deviation from the reference's initial value at 25°C . By adding the maximum deviation for a given device to its initial tolerance, the total possible error is determined.

Output Current

The MX584 is capable of sinking as well as sourcing current. The circuit is also protected for output shorts to either $+V_S$ or ground (COMMON). The output's voltage-versus-current characteristic is shown in the Typical Characteristics section.

Dynamic Performance

The turn-on settling performance of the MX584 is shown in the Typical Characteristics. Both coarse and fine transient response is shown. The reference typically settles to 1mV (10V output) within 180 μs after power is applied.

Noise Filtering

The bandwidth of the MX584's output amplifier can be limited by connecting a capacitor between the CAP and V_{BG} pins (see Figure 4). Typical values range from 0.01 μF to 0.1 μF . The reduction of wideband and feedthrough noise is plotted in a graph in the Typical Characteristics section.

Strobe Input

The STROBE input, pin 5, zeroes the reference output when it is pulled LOW. If no current is pulled from STROBE, operation is normal. The threshold of the input is 200mV, so an open-drain N-channel FET or open-collector transistor driven from logic is re-

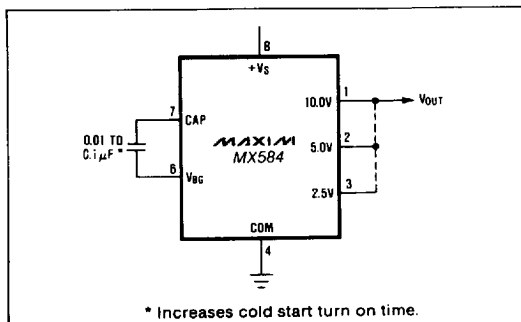


Figure 4. Additional Noise Filtering with an External Capacitor

Pin Programmable Precision Voltage Reference

Applications

Precision High Current Reference

A PNP power transistor, or Darlington, is easily connected to the MX584 to greatly increase its output current. The circuit in Figure 6 provides a +10V output at up to 4 Amps. If the load has a significant capacitive component, C1 should be added. If the load is purely resistive, high frequency supply rejection is improved without C1. An NPN output transistor or Darlington can also be used to boost output current as shown in Figure 7.

Current Limiter

By adding a single resistor as shown in Figure 8, the MX584 is turned into a precision current limiter for applications where the driving voltage is 5V to 40V. The programmed current ranges from 0.75mA to 5mA.

commended (see Figure 5). The current sinking ability should be at least 500 μ A and the leakage current should be 5 μ A or less. While shut down, the MX584 should not be required to source or sink current unless a 0.7V residual output is acceptable. If the reference is required to sink transient current while shut down, the current flowing out of STROBE should be limited with 100 Ω as shown in the dashed connection in Figure 5.

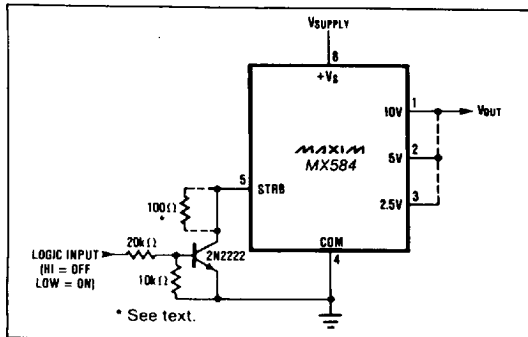


Figure 5. Use of Strobe Terminal

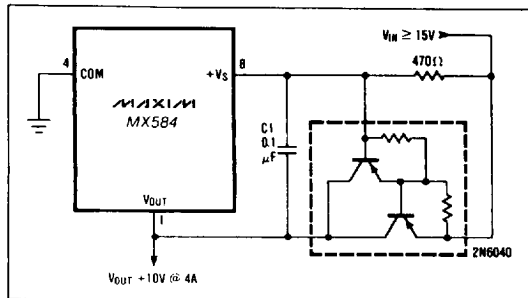


Figure 6. High Current Precision Supply

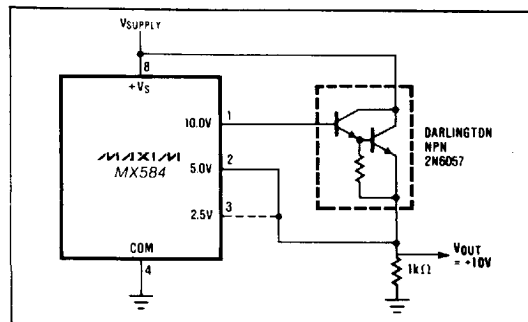


Figure 7. NPN Output Current Booster

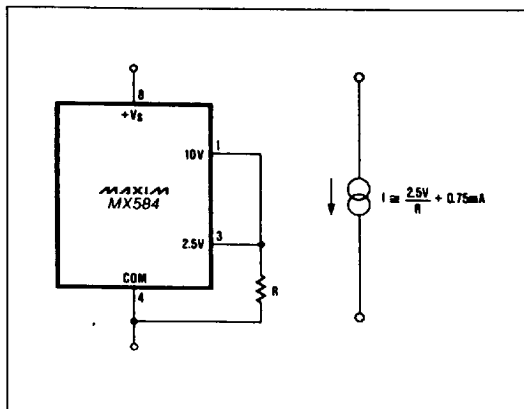


Figure 8. Precision Current Limiter

Negative 10V Reference

In applications which require a -10V, -7.5V, -5.0V, or -2.5V reference, the MX584 can be connected as a two-terminal device and biased like a zener diode. The circuit is shown in Figure 9. +Vs and VOUT are connected to the analog ground bus, and the MX584's COMMON pin is connected, through a resistor, to the negative supply. With 1mA flowing in the reference, the output is typically 2mV greater than what is obtained with a conventional, positive, hook-up.

When using the 2-terminal connection, the load and the bias resistor must be selected so that the current flowing in the reference is maintained between 1mA and 5mA. The operating temperature range for this connection is limited to -55° to +85°C.

MAXIM

5876651 0015050 696

Pin Programmable Precision Voltage Reference

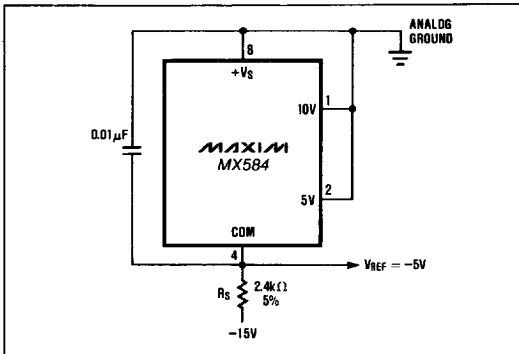


Figure 9. Two-Terminal -5 Volt Reference

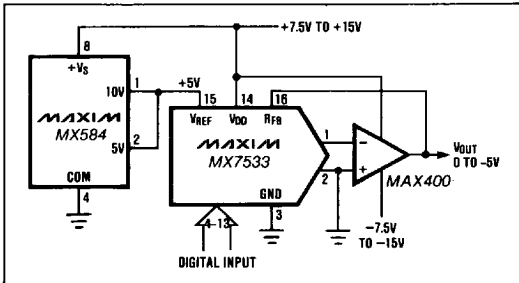


Figure 10. Low Power 10 Bit CMOS DAC Connection

Reference for DACs and ADCs

The MX584 is well suited for use with a wide variety of D-to-A converters, especially CMOS DACs. Figure 10 shows a circuit in which an MX7533 10 bit DAC outputs 0 to -5V when using a +5V reference. For a positive DAC output, the MX584 can be configured as a 2-terminal negative reference as well by using the connection of Figure 9.

In Figure 11, an MX7574 CMOS A/D converter uses an MX584, connected for $-2.5V$, as its reference input so that the system can operate from $\pm 5V$ power. The analog input range for the circuit is $0V$ to $+2.5V$.


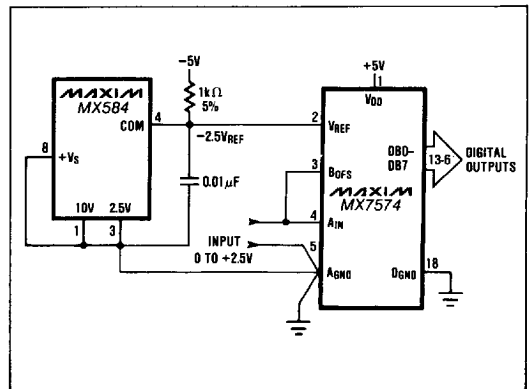


Figure 11. MX584 as Negative 2.5 Volt Reference for a CMOS ADC


Chip Topography

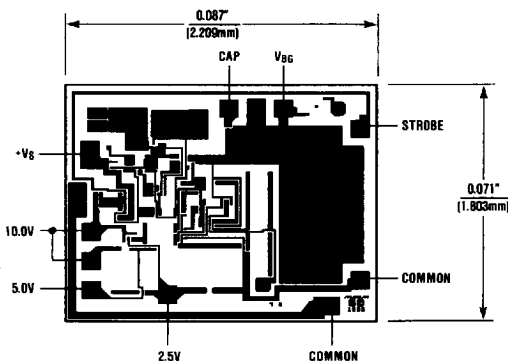

Pin Programmable Precision Voltage Reference

Package Information


MX584

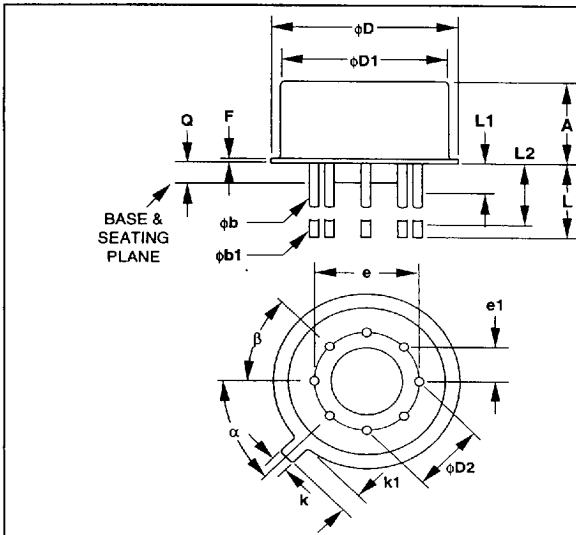

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.165	0.185	4.19	4.70
A1	0.016	0.019	0.41	0.48
A2	0.016	0.021	0.41	0.53
A3	0.335	0.375	8.51	9.40
B	0.305	0.335	7.75	8.51
B1	0.110	0.160	2.79	4.06
C	0.200 BSC		5.08 BSC	
D	0.100 BSC		2.54 BSC	
D1	—	0.040	—	1.02
D2	0.027	0.034	0.69	0.86
E	0.027	0.045	0.69	1.14
F	0.500	0.750	12.70	19.05
G	—	0.050	—	1.27
H	0.250	—	6.35	—
I	0.010	0.045	0.25	1.14
J	45° BSC		45° BSC	
K	45° BSC		45° BSC	

8-PIN
TO-99 METAL CAN
PACKAGE

21-0022A

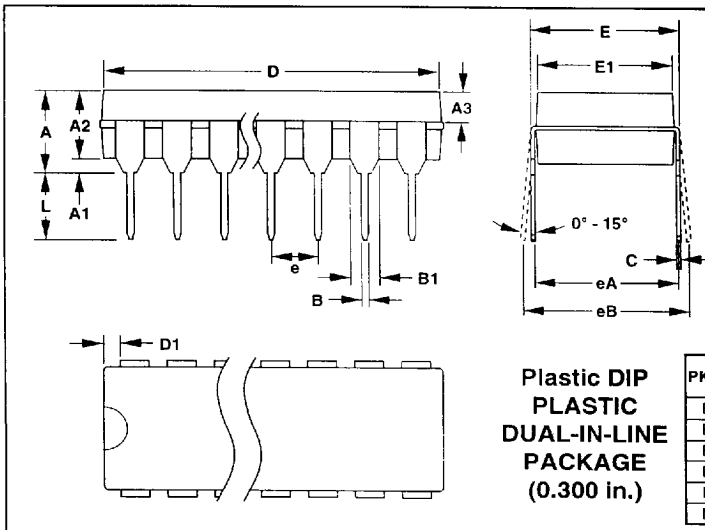

Plastic DIP
PLASTIC
DUAL-IN-LINE
PACKAGE
(0.300 in.)

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	—	0.200	—	5.08
A1	0.015	—	0.38	—
A2	0.125	0.175	3.18	4.45
A3	0.055	0.080	1.40	2.03
B	0.016	0.022	0.41	0.56
B1	0.045	0.065	1.14	1.65
C	0.008	0.012	0.20	0.30
D	0.005	0.080	0.13	2.03
E	0.300	0.325	7.62	8.26
E1	0.240	0.310	6.10	7.87
F	0.100	—	2.54	—
F1	0.300	—	7.62	—
F2	—	0.400	—	10.16
G	0.115	0.150	2.92	3.81

PKG.	DIM	PINS	INCHES		MILLIMETERS	
			MIN	MAX	MIN	MAX
P	D	8	0.348	0.390	8.84	9.91
P	D	14	0.735	0.765	18.67	19.43
P	D	16	0.745	0.765	18.92	19.43
P	D	18	0.885	0.915	22.48	23.24
P	D	20	1.015	1.045	25.78	26.54
N	D	24	1.14	1.265	28.96	32.13

21-0043A


MAXIM

5876651 0015052 469


7

Pin Programmable Precision Voltage Reference

Package Information (continued)

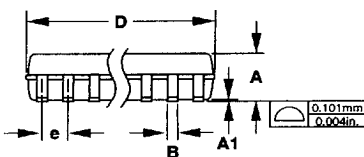


DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.053	0.069	1.35	1.75
A1	0.004	0.010	0.10	0.25
B	0.014	0.019	0.35	0.49
C	0.007	0.010	0.19	0.25
E	0.150	0.157	3.80	4.00
e	0.050		1.27	
H	0.228	0.244	5.80	6.20
L	0.016	0.050	0.40	1.27




**Narrow SO
SMALL-OUTLINE
PACKAGE
(0.150 in.)**

DIM	PINS	INCHES		MILLIMETERS	
		MIN	MAX	MIN	MAX
D	8	0.189	0.197	4.80	5.00
D	14	0.337	0.344	8.55	8.75
D	16	0.386	0.394	9.80	10.00

21-0041A

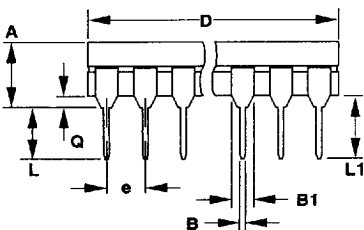

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	—	0.200	—	5.08
B	0.014	0.023	0.36	0.58
B1	0.038	0.065	0.97	1.65
C	0.008	0.015	0.20	0.38
E	0.220	0.310	5.59	7.87
E1	0.290	0.320	7.37	8.13
e	0.100		2.54	
L	0.125	0.200	3.18	5.08
L1	0.150	—	3.81	—
Q	0.015	0.070	0.38	1.78
S	—	0.098	—	2.49
S1	0.005	—	0.13	—

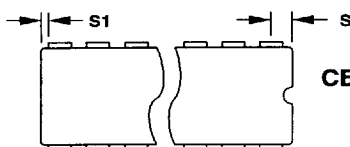

**CERDIP
CERAMIC DUAL-IN-LINE
PACKAGE
(0.300 in.)**

DIM	PINS	INCHES		MILLIMETERS	
		MIN	MAX	MIN	MAX
D	8	—	0.405	—	10.29
D	14	—	0.785	—	19.94
D	16	—	0.840	—	21.34
D	18	—	0.960	—	24.38
D	20	—	1.060	—	26.92
D	24	—	1.280	—	32.51

21-0045A

■ 5876651 0015053 3T5 ■

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

8 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600

© 1995 Maxim Integrated Products

Printed USA

MAXIM is a registered trademark of Maxim Integrated Products.