

FS50ASJ-03

HIGH-SPEED SWITCHING USE


FS50ASJ-03



- ˆ 4V DRIVE
- ˆ V_{DS} 30V
- ˆ $r_{DS(ON)}$ (MAX) 19m Ω
- ˆ I_D 50A
- ˆ Integrated Fast Recovery Diode (TYP.) 60ns

OUTLINE DRAWING

Dimensions in mm

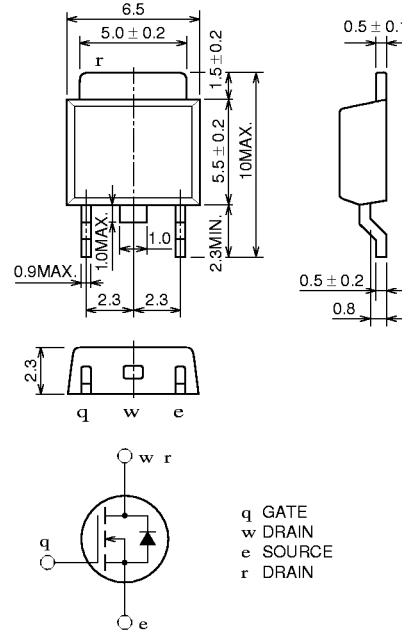

MP-3

APPLICATION

Motor control, Lamp control, Solenoid control
DC-DC converter, etc.

MAXIMUM RATINGS (T_c = 25°C)

Symbol	Parameter	Conditions	Ratings	Unit
V_{DS}	Drain-source voltage	$V_{GS} = 0V$	30	V
V_{GSS}	Gate-source voltage	$V_{DS} = 0V$	±20	V
I_D	Drain current		50	A
I_{DM}	Drain current (Pulsed)		200	A
I_{DA}	Avalanche drain current (Pulsed)	$L = 30\mu H$	50	A
I_S	Source current		50	A
I_{SM}	Source current (Pulsed)		200	A
P_D	Maximum power dissipation		35	W
T_{ch}	Channel temperature		-55 ~ +150	°C
T_{stg}	Storage temperature		-55 ~ +150	°C
—	Weight	Typical value	0.26	g





FS50ASJ-03

HIGH-SPEED SWITCHING USE

ELECTRICAL CHARACTERISTICS (Tch = 25°C)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
V(BR)DSS	Drain-source breakdown voltage	ID = 1mA, VGS = 0V	30	—	—	V
IGSS	Gate-source leakage current	VGS = ±20V, VDS = 0V	—	—	±0.1	μA
IDSS	Drain-source leakage current	VDS = 30V, VGS = 0V	—	—	0.1	mA
VGS(th)	Gate-source threshold voltage	ID = 1mA, VDS = 10V	1.0	1.5	2.0	V
rDS(ON)	Drain-source on-state resistance	ID = 25A, VGS = 10V	—	15	19	mΩ
rDS(ON)	Drain-source on-state resistance	ID = 25A, VGS = 4V	—	21	35	mΩ
VDS(ON)	Drain-source on-state voltage	ID = 25A, VGS = 10V	—	0.375	0.475	V
yfs	Forward transfer admittance	ID = 25A, VDS = 10V	—	28	—	S
Ciss	Input capacitance	VDS = 10V, VGS = 0V, f = 1MHz	—	1600	—	pF
Coss	Output capacitance		—	500	—	pF
Crss	Reverse transfer capacitance		—	260	—	pF
td(on)	Turn-on delay time	VDD = 15V, ID = 25A, VGS = 10V, RGEN = RGS = 50Ω	—	17	—	ns
tr	Rise time		—	90	—	ns
td(off)	Turn-off delay time		—	130	—	ns
tf	Fall time		—	125	—	ns
VSD	Source-drain voltage	IS = 25A, VGS = 0V	—	1.0	1.5	V
Rth(ch-c)	Thermal resistance	Channel to case	—	—	3.57	°C/W
trr	Reverse recovery time	IS = 25A, dis/dt = -50A/μs	—	60	—	ns


PERFORMANCE CURVES

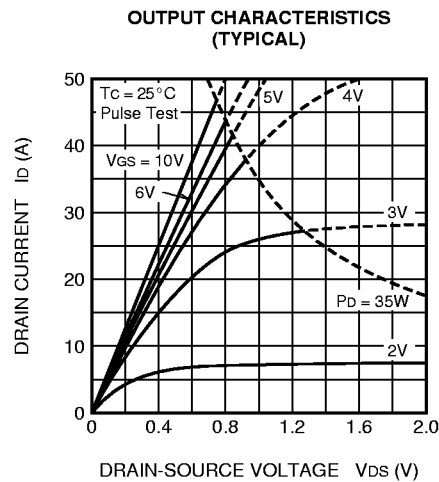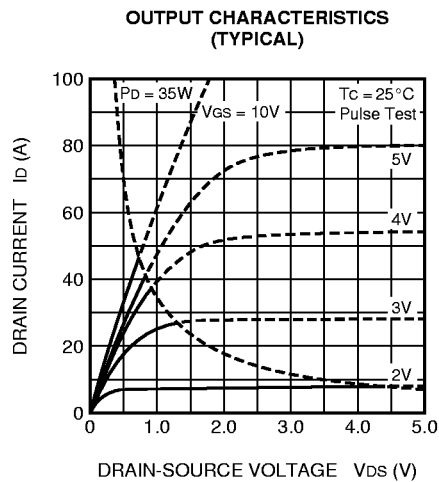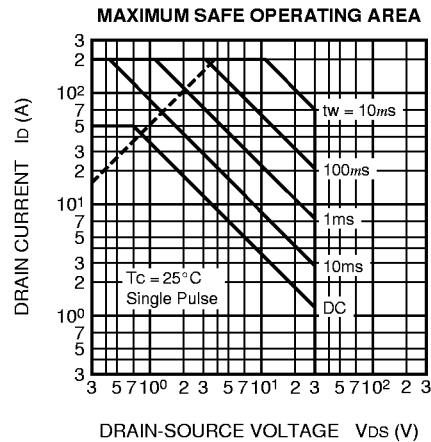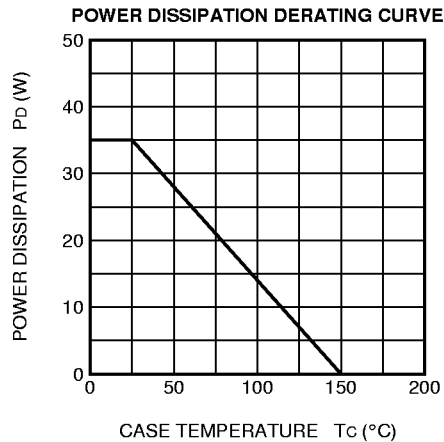


FS50ASJ-03

HIGH-SPEED SWITCHING USE


ON-STATE VOLTAGE VS.
GATE-SOURCE VOLTAGE
(TYPICAL)

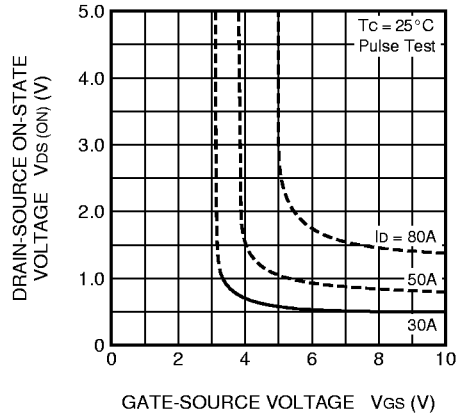


ON-STATE RESISTANCE VS.
DRAIN CURRENT
(TYPICAL)

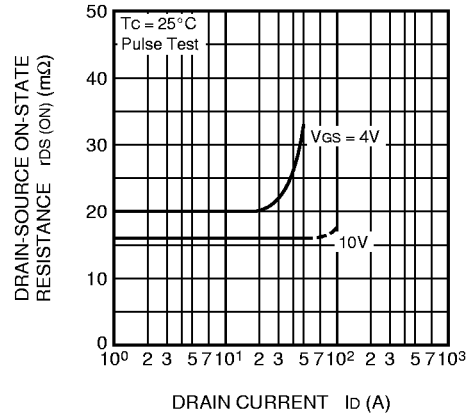


TRANSFER CHARACTERISTICS
(TYPICAL)

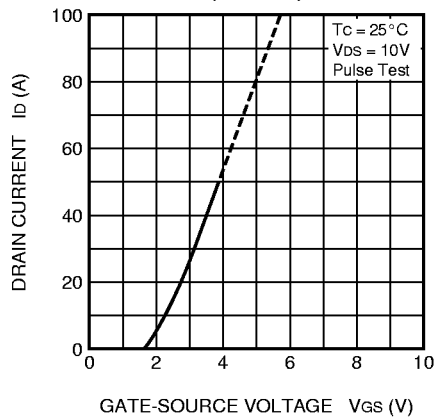


FORWARD TRANSFER ADMITTANCE
VS. DRAIN CURRENT
(TYPICAL)

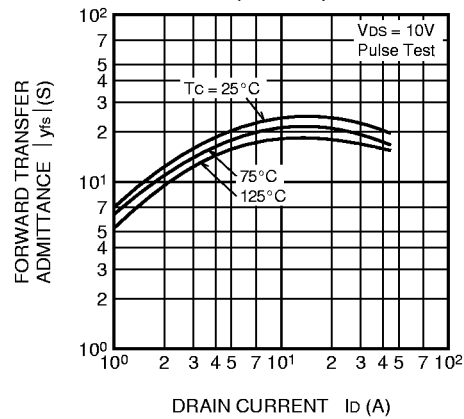

CAPACITANCE VS.
DRAIN-SOURCE VOLTAGE
(TYPICAL)

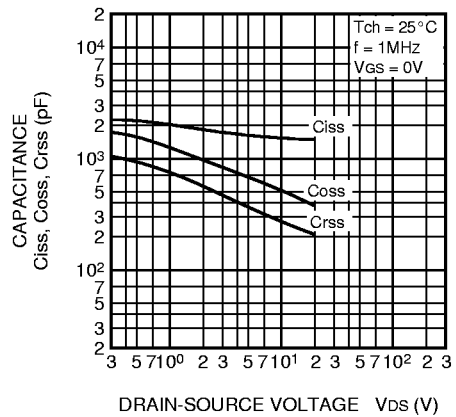


SWITCHING CHARACTERISTICS
(TYPICAL)

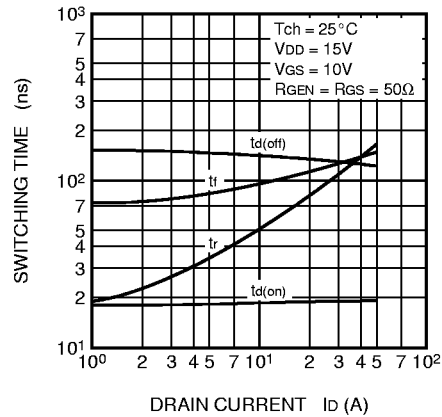


FS50ASJ-03

HIGH-SPEED SWITCHING USE


**GATE-SOURCE VOLTAGE
VS. GATE CHARGE
(TYPICAL)**

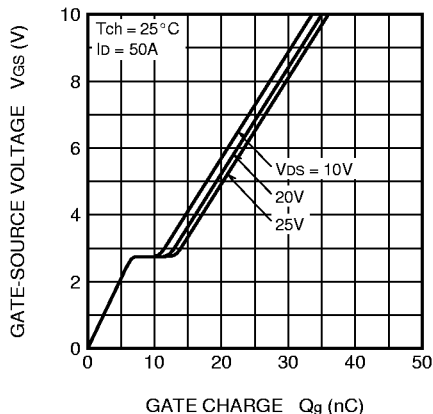


**SOURCE-DRAIN DIODE
FORWARD CHARACTERISTICS
(TYPICAL)**

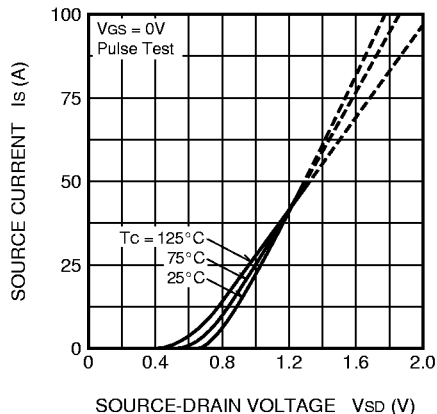


**ON-STATE RESISTANCE VS.
CHANNEL TEMPERATURE
(TYPICAL)**

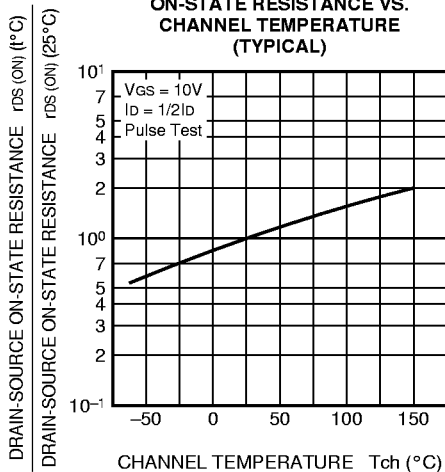

**THRESHOLD VOLTAGE VS.
CHANNEL TEMPERATURE
(TYPICAL)**

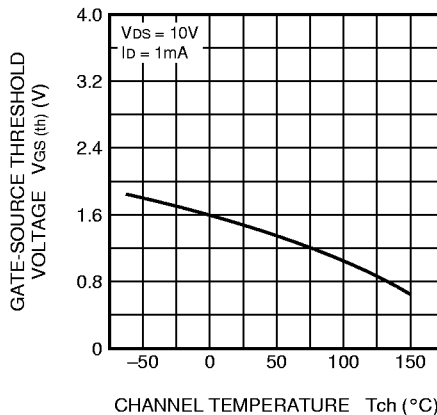

**BREAKDOWN VOLTAGE VS.
CHANNEL TEMPERATURE
(TYPICAL)**

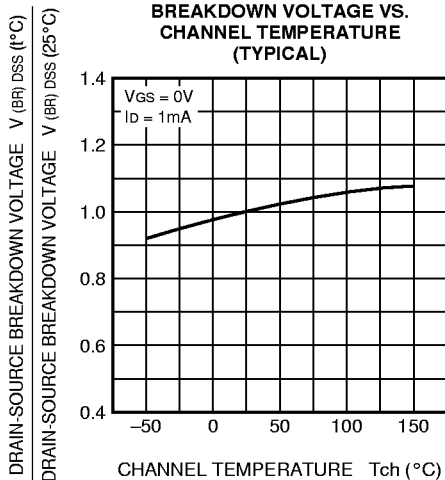

**TRANSIENT THERMAL IMPEDANCE
CHARACTERISTICS**

