

MX•COM, INC.

Advance Information - MX165A

Preliminary Information - MX365A

M X-COM INC

MX165A MX365A

CTCSS ENCODER/DECODER WITH TX/RX AUDIO FILTERS

FEATURES


- 39 CTCSS Tones + Notone
- TX/RX Audio Filters
- TX Tone Phase Reversals
- Serial or Parallel Programming
- MX165A Rated at 3.75 V

BENEFITS

- Scanning of any Channel
- Improved Sinad
- Squelch Tail Elimination
- Easy μ P Interface

APPLICATIONS

- Mobile Radio Channel Sharing
- Wireless Intercom
- EIA 220B - 37 Tone Plus 97.4Hz & 69.3Hz
- MX165A Serves 3-Cell Applications

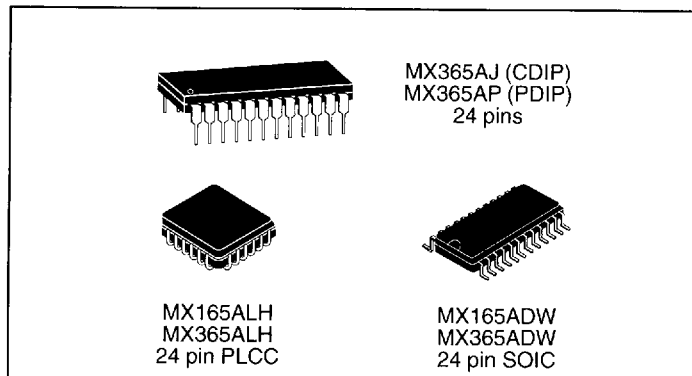

Packages	MX165A	MX365A
24-pin CDIP		•
24-pin PDIP		•
24-pin PLCC	•	•
24-pin SOIC	•	•

Description

Voice on shared radio channels is multiplexed with a subaudible CTCSS tone as a means of directing messages among user groups sharing the same RF frequency. Continuous Tone Controlled Sub-audible Squelch (CTCSS) modulates the transmitter with a discrete tone, taken from a field of 39 in the range of 67 to 250 Hz, according to EIA-220-B Standard plus 69.3Hz and 97.4Hz. Groups of radio receivers, segregated by common interest and assigned tone, demodulate the voice/tone mixture for voice messages to be heard.

The MX165A and MX365A CTCSS Encoder/Decoders enhance voice/tone multiplexing with an on-chip filter that attenuates TX speech 36dB at 250Hz, while passing signals >300Hz with only ± 1 dB of ripple.

Early CTCSS designs did not filter TX speech, depending instead on the host transmitter's pre-emphasis network. At only 6dB/octave, their attenuation of speech components at the higher CTCSS tones was only a few dB, which resulted in "talk-off" (low frequency voice components unsquelching the receiver audio).

The MX165A and MX365A feature TX/RX selection and a LOAD/LATCH pin. A Notone program code has been included to permit scanning channels without CTCSS. A choice of serial or parallel tone programming is offered. Operation of the PTL signal during TX reverses the phase of the transmitted CTCSS tone by 180°. This is used in some radios to eliminate squelch tails.

The MX165A requires a single 3.75-volt supply and a 1 MHz clock or crystal. The MX365A requires a single 5-volt supply and a 1MHz clock or crystal.

M X-COM INC

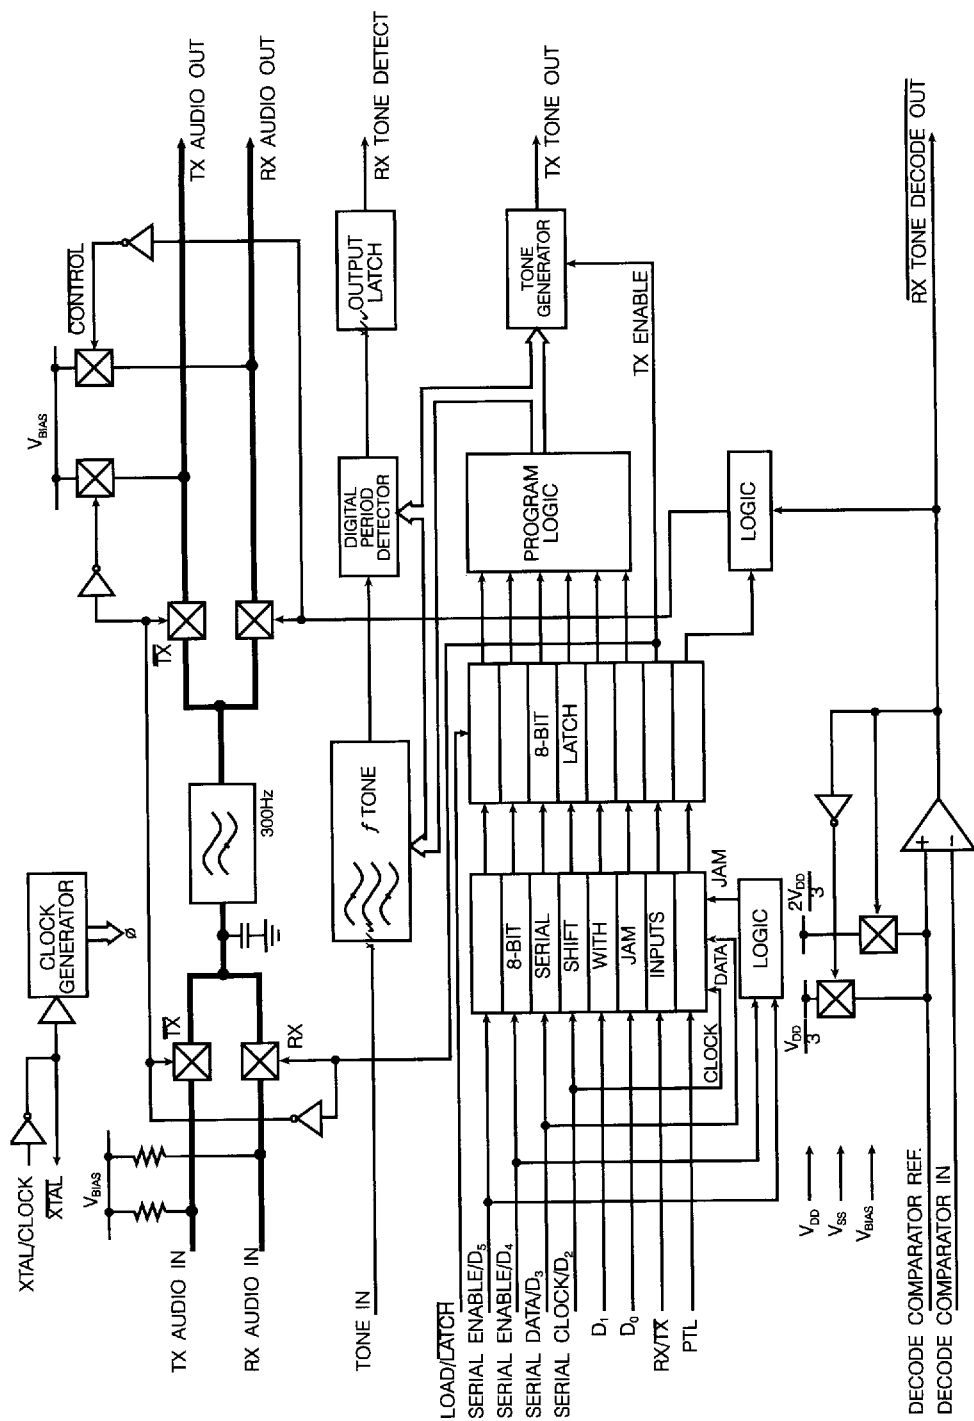


Figure 1 - MX165A/MX365A Internal Block Diagram

PIN FUNCTION TABLE


Pin	Function	M X-COM INC
MX165A MX365A		
1	V_{DD} : Positive Supply.	
2	Xtal/Clock : Input to the on-chip inverter used with a 1 MHz Xtal or external clock source.	
3	Xtal : Output of the on-chip inverter (clock output).	
4	Load/Latch : Controls 8 on-chip latches and is used to latch RX/TX, PTL, and D0-D5. This pin is internally pulled to V _{DD} . A logic "1" applied to this input puts the 8 latches in "transparent" mode. A logic "0" applied to this input puts the 8 latches in the "latched" mode. In parallel mode data is loaded and latched by a logic 1-0 transition (see Fig. 3). In serial mode data is loaded and latched by a 0-1-0 strobe pulse on this pin (see Fig. 4).	
5	D5/Serial Enable 1 : Data input D5 (in parallel mode). A logic "1" applied to this input together with a logic "0" applied to D4/Serial Enable 2 will put the device in serial mode (see Fig. 4). This pin is internally pulled to V _{DD} .	
6	D4/Serial Enable 2 : Data input D4 (in parallel mode). A logic "0" applied to this input together with a logic "1" on pin 5 will place the device in serial mode (see Fig. 5). This pin is internally pulled to V _{DD} .	
7	D3/Serial Data Input : Data input D3 (in parallel mode). In serial mode this pin becomes the serial data input for D5-D0, RX/TX and PTL (see Fig. 4). D5 is clocked first and PTL last. This pin is internally pulled to V _{DD} .	
8	D2/Serial Clock : Data input D2 (in parallel mode). In serial mode this pin becomes the serial clock input. Data is clocked on the positive going edge (see Fig. 4). This pin is internally pulled to V _{DD} .	
9	D1 : Data input D1 (in parallel mode). This pin is internally pulled to V _{DD} .	
10	D0 : Data input D0 (in parallel mode). This pin is internally pulled to V _{DD} .	
11	V_{SS} : Negative supply.	
12	Decode Comparator Ref. : This pin is internally biased to V _{DD} /3 or 2V _{DD} /3 via 1M resistors depending on the logical state of the RX Tone Decode Out pin. RX Tone Decode Out = 1 will bias this input 2V _{DD} /3; a logic "0" will bias this input V _{DD} /3. This input provides the decode comparator reference voltage, and switching of bias voltages provides hysteresis to reduce "chatter" under marginal conditions.	
13	RX Tone Decode Out : This is the gated output of the decode comparator. This output is used to gate the RX Audio path. A logic "0" on this pin indicates a successful decode and that the Decode Comparator Input pin is more positive than the Decode Comparator Ref. input (see Table 1).	
14	Decode Comparator Input : This is the inverting input of the decode comparator. This pin is normally connected to the integrated output of the RX Tone Detect line.	
15	RX Tone Detect : In RX mode this output will go to logic "1" during a successful decode. It must be externally integrated to control response and deresponse times (see Table 1).	
16	TX Tone Out : The CTCSS sinewave output appears on this pin under control of the RX/TX pin. This pin, when not transmitting a tone, may be biased to V _{DD} -0.7V or O/C (see Table 1). This pin is an emitter follower output with high impedance load, requiring capacitive coupling or a low impedance (<1kΩ) load to ground.	

PIN FUNCTION TABLE

M X-COM INC

Pin	Function
17	RX/TX: This input (in parallel mode) selects RX or TX modes (see Fig. 2). In serial mode this function is serially loaded. This pin is internally pulled to V_{DD} via a 1M Ω resistor.
18	PTL: In parallel RX mode this pin operates as a "Push To Listen" function by enabling the RX audio path, thus overriding the tone squelch function. In parallel TX mode this pin reverses the phase of the transmitted CTCSS tone (used for squelch tail elimination). In serial mode this function is serially loaded (see Fig. 2).
19	RX Audio Out: This is the high pass filtered receive audio output pin. This pin outputs audio when RX Tone Decode = 0, or PTL = 1, or when Notone is programmed (see Table 2). In TX mode this pin is biased to $V_{DD}/2$.
20	TX Audio Out: This is the high pass filtered transmit audio output pin. In TX mode this pin outputs audio present at the TX Audio Input pin. In RX mode this pin is biased to $V_{DD}/2$.
21	Bias: This pin is the output of an internally generated $V_{DD}/2$ bias level and would normally be externally decoupled to V_{SS} via capacitor C7.
22	TX Audio In: This is the TX Audio input pin. In TX mode it may be prefiltered, using the TX audio path, thus helping to avoid talkoff due to intermodulation of speech frequencies with the transmitted CTCSS tone. This pin is internally biased to $V_{DD}/2$.
23	RX Audio In: This is the input to the audio high pass filter in RX mode. It is internally biased to $V_{DD}/2$.
24	Tone Input: This is the input to the CTCSS tone detector. It is internally biased to $V_{DD}/2$.

NOTE: Pins labeled "N/C" (no connect) may have internal connections. Do Not Use.

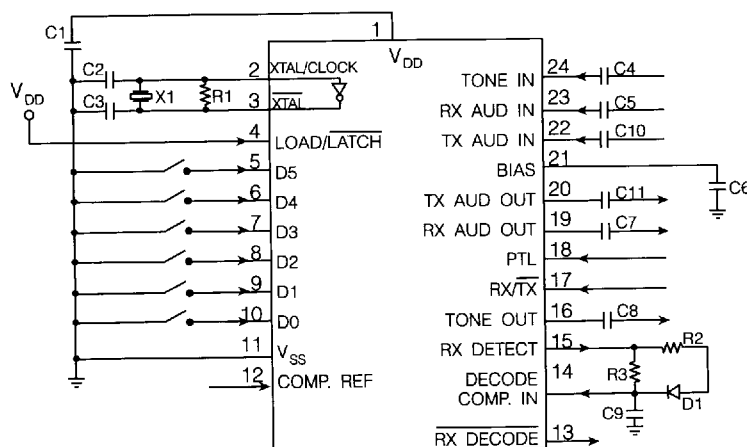MX165AJ
MX365AJ

Component Values

R1	1M Ω
R2	560k Ω
R3	820k Ω
X1	1MHz
C1	0.1 μ F
C2	68pF
C3	33pF
C4	0.1 μ F
C5	0.1 μ F
C6	0.47 μ F
C7	0.1 μ F
C8	0.1 μ F
C9	0.1 μ F
C10	0.1 μ F
C11	0.1 μ F
D1	small signal

Tolerances: Resistors: $\pm 10\%$
Capacitors: $\pm 20\%$
Xtal: $\pm 0.1\%$

Figure 2 - External Components for MX165A and 365A

I/O CONDITIONS

	INPUT PIN CONDITION			OUTPUT PIN CONDITION		RESULT/FUNCTION					
D0-D5	$\overline{\text{RX/TX}}$	PTL	Decode Comp. Input	RX Tone Detect	$\overline{\text{Tone}}$ Decode	Tone Transmitter Enabled	TX Tone Phase Reversed	TX Audio Path Enabled	Tone Decoder Enabled	RX Audio Path Enabled	Notes
Tone	0	0	X	0	1	Yes	No	Yes	No	No (bias)	1a
Tone	0	1	X	0	1	Yes	Yes	Yes	No	No (bias)	1b
No tone	0	X	X	0	1	No (bias)	X	Yes	No	No (bias)	2
Tone	1	0	0	0	1	No (o/c)	X	No	Yes	No (bias)	3a
Tone	1	1	0	0	1	No (o/c)	X	No	Yes	Yes	3b
Tone	1	X	1	1	0	No (o/c)	X	No	Yes	Yes	4
No tone	1	X	X	X	0	No (o/c)	X	No	Yes	Yes	5


Table 1 - Combinations of Input/Output Conditions

M X-COM INC



Notes:

- 1a. Normal tone transmit condition.
- 1b. Tone transmit with phase reversed.
2. Notone programmed in TX mode, tone transmit O/P set to $V_{cc}/2 - 0.7V$. TX audio path enabled.
- 3a. Normal decode standby.
- 3b. Normal decode standby with PTL used to enable audio.
4. Normal decode of correct CTCSS tone condition, PTL has no effect.
5. Notone programmed in RX mode, tone transmit O/P (o/c). RX audio path enabled.

FILTER RESPONSE

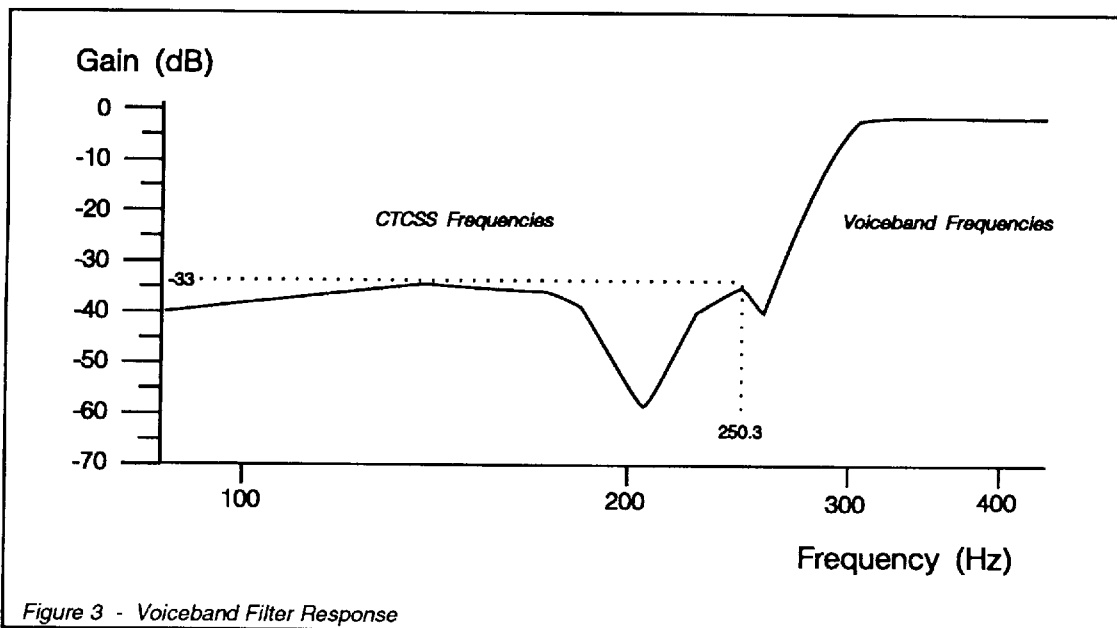

SERIAL AND PARALLEL MODE TIMING

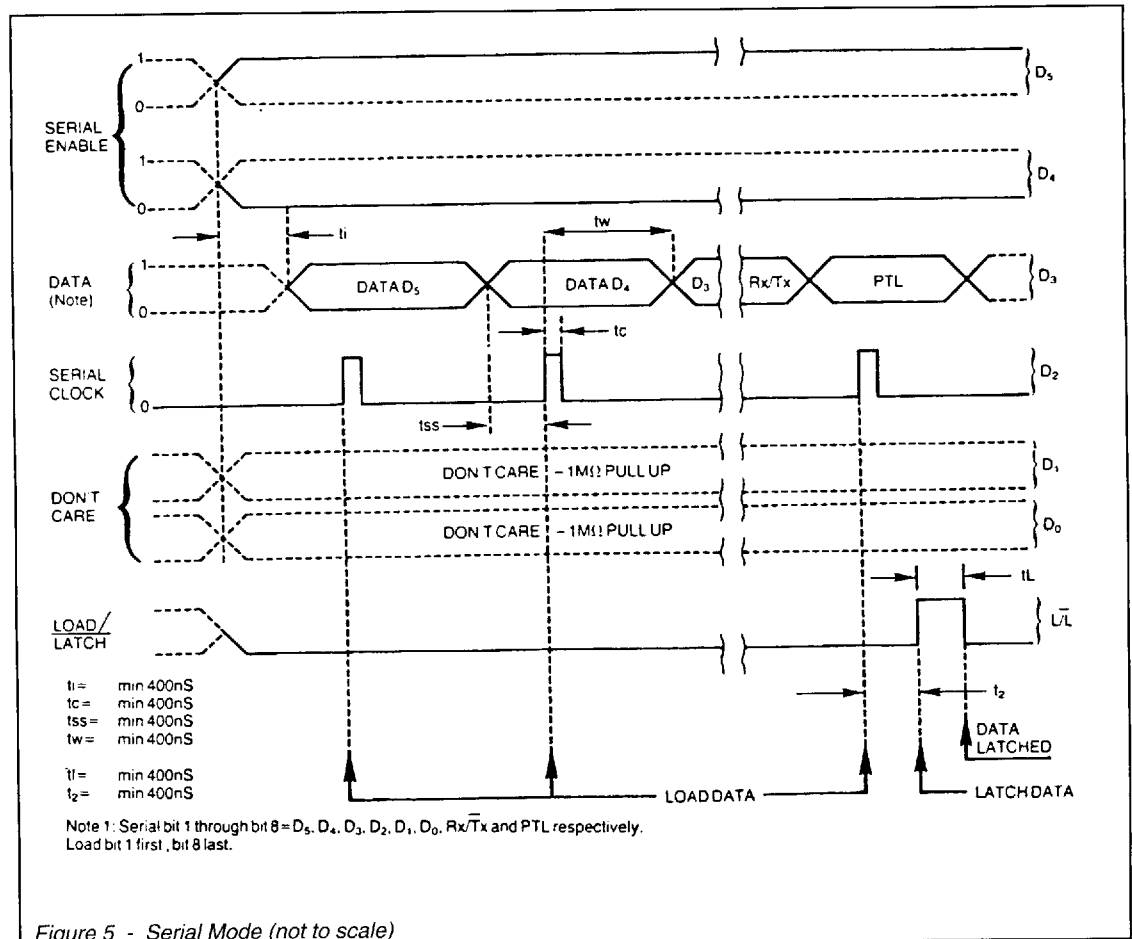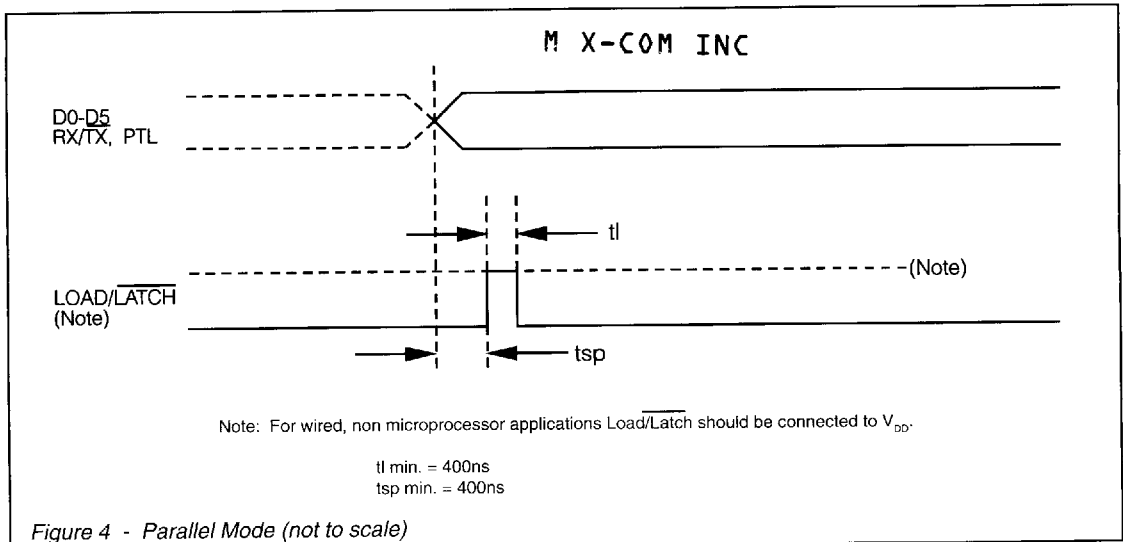

CTCSS PROGRAMMING TABLE

M X-COM INC

Programming Inputs

Tone			M X-COM INC						
Nominal Frequency (Hz)	MX165/365A Freq. (Hz)	Δf_o (%)	D5	D4	D3	D2	D1	D0	Hex
67.0	67.05	+0.07	1	1	1	1	1	1	3F
69.3	69.32	+0.03	1	1	1	0	0	1	39
71.9	71.9	0	0	1	1	1	1	1	1F
74.4	74.35	-0.07	1	1	1	1	1	0	3E
77.0	76.96	-0.5	0	0	1	1	1	1	0F
79.7	79.77	+0.09	1	1	1	1	0	1	3D
82.5	82.59	+0.1	0	1	1	1	1	0	1E
85.4	85.38	-0.2	1	1	1	1	0	0	3C
88.5	88.61	+0.13	0	0	1	1	1	0	0E
91.5	91.58	+0.09	1	1	1	0	1	1	3B
94.8	94.76	-0.04	0	1	1	1	0	1	1D
97.4	97.29	-0.11	1	1	1	0	1	0	3A
100.0	99.96	-0.04	0	0	1	1	0	1	0D
103.5	103.43	-0.07	0	1	1	1	0	0	1C
107.2	107.15	-0.05	0	0	1	1	0	0	0C
110.9	110.77	-0.12	0	1	1	0	1	1	1B
114.8	114.64	-0.14	0	0	1	0	1	1	0B
118.8	118.8	0	0	1	1	0	1	0	1A
123.0	122.8	-0.17	0	0	1	0	1	0	0A
127.3	127.08	-0.17	0	1	1	0	0	1	19
131.8	131.67	-0.10	0	0	1	0	0	1	09
136.5	136.61	+0.08	0	1	1	0	0	0	18
141.3	141.32	+0.02	0	0	1	0	0	0	08
146.2	146.37	+0.12	0	1	0	1	1	1	17
151.4	151.09	-0.2	0	0	0	1	1	1	07
156.7	156.88	+0.11	0	1	0	1	1	0	16
162.2	162.31	+0.07	0	0	0	1	1	0	06
167.9	168.14	+0.14	0	1	0	1	0	1	15
173.8	173.48	-0.19	0	0	0	1	0	1	05
179.9	180.15	+0.14	0	1	0	1	0	0	14
186.2	186.29	+0.05	0	0	0	1	0	0	04
192.8	192.86	+0.03	0	1	0	0	1	1	13
203.5	203.65	+0.07	0	0	0	0	1	1	03
210.7	210.17	-0.25	0	1	0	0	1	0	12
218.1	218.58	+0.22	0	0	0	0	1	0	02
225.7	226.12	+0.18	0	1	0	0	0	1	11
233.6	234.19	+0.25	0	0	0	0	0	1	01
241.8	241.08	-0.30	0	1	0	0	0	0	10
250.3	250.28	-0.01	0	0	0	0	0	0	00
Notone		N/A	1	1	0	0	0	0	30
Serial Input Mode		N/A	1	0	Data	Clock	X	X	2X
Test	4082	N/A	1	1	0	0	1	1	33 or any invalid address

Table 2 - CTCSS Tones

SPECIFICATIONS

ABSOLUTE MAXIMUM RATINGS

Exceeding the maximum rating can result in device damage. Operation of the device outside the operating limits is not suggested.

Supply Voltage	-0.3 to 7.0 V
Input Voltage at any pin (ref $V_{SS} = 0V$)	-0.3 V to $V_{DD} + 0.3 V$
Sink/Source Current (Total)	20mA
Maximum Device Dissipation	100mW
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C

OPERATING LIMITS

All devices were measured under the following conditions unless otherwise noted.

MX365A $V_{DD} = 5.0V$
MX165A $V_{DD} = 3.75V$
$T_{AMB} = 25^\circ C$
MX165A 0dB ref. = 100mVrms @ 1kHz
MX365A 0dB ref. = 308mVrms @ 1kHz

Composite signal: 0dB 1kHz test tone, -12dB noise (band limited 6kHz gaussian white noise), -20dB f_0 CTCSS tone.

Characteristics	See Note	Min.	Typ.	Max.	Unit
-----------------	----------	------	------	------	------

STATIC VALUES

M X-COM INC

Supply Voltage					
MX165A		3.0	3.75	4.5	V
MX365A		4.5	5.0	5.5	V
Supply Current, MX165A					
TX		-	-	3.5	mA
RX		-	-	3.5	mA
RX Monitor		-	-	2.5	mA
Supply Current, MX365A					
TX		-	3.5	-	mA
RX		-	3.5	-	mA
RX Monitor		-	2.5	-	mA
Tone Input Impedance		-	1	-	MΩ
Audio Input Impedance		-	1	-	MΩ
Audio Output Impedance		-	1	-	kΩ
Digital Input Impedance	1	-	1	-	MΩ
Input logic "1"	1	70% V_{DD}	-	-	V
Input logic "0"	1	-	-	30% V_{DD}	V
Logic "1" output 1' source = 0.1mA	2	80% V_{DD}	-	-	V
Logic "0" output 1' sink - 0.1mA	2	-	-	20% V_{DD}	V

DYNAMIC VALUES

Decoder

Decode Input Signal Level					
MX165A	3	-10	-	+3	dB
MX365A	3	-20	-	+3	dB
Decode Response Time	3,6,7,10	-	-	250	ms
Dereponse Time	3,6,7,10	-	180	250	ms
Decode Selectivity	3	±0.5	-	±3	% f_0

Encoder

Tone Output Level, MX165A	400	564	800	mVrms
Tone Output Level (relative to 775mVrms), MX365A	-3	0	-	dB
Tone Frequency Accuracy (f error)	-0.3	-	+0.3	% f_0

Characteristics	See Note	Min.	Typ.	Max.	Unit
Risetime to 90% nominal O/P:					
$f_o > 100\text{Hz}$	4,10	-	15	75	ms
$f_o < 100\text{Hz}$	4,10	-	45	120	ms
Tone Output Load Current		-	-	5	mA
Total Harmonic Distortion		-	2	5	%
Output Level Variation Between Tones	11	-1.0	-	+1.0	dB
TX Output Impedance		-	2.0	-	k Ω

Audio Filter

Total Harmonic Distortion	5,10	-	2	5	%
Output Noise Level (input a.c. short circuit, audio switch enabled)	8	-	-54	-48	dB
Sinad	9	36	40	-	dB
Spurious Emissions		-	-	-48	dB
Cutoff Frequency		-	300	-	Hz
Bandpass Ripple (300-3000Hz)		-	-	2	dB
Stopband Attenuation <250Hz	5	33	36	-	dB
Passband Gain 1kHz					
MX165A		-1.0	-	1.5	dB
MX365A		-	0	-	dB

Audio Switch

Isolation	5	-	60	-	dB
-----------	---	---	----	---	----

Serial/Parallel Inputs (See Figures 3 &4)

Parallel Set-up Time t_{sp}	400	-	-	-	ns
Load/Latch Pulse Width t_l	400	-	-	-	ns
Serial Clock Pulse Width t_c	400	-	-	-	ns
Serial Set-up Time t_{ss}	400	-	-	-	ns
Serial Clock Frequency	-	-	1	-	MHz

NOTES:

- Refers to RX/TX, PTL, Decode Comparator Input, D0-D5.
- All logic outputs.
- Composite Signal Test Condition.
- Any programming tone and RL = 10,000, CL = 15pF. This includes response to a phase reversal instruction.
- 1kHz references = 0dB.
- $f_o > 100\text{Hz}$ (for $100\text{Hz} > f_o > 67\text{Hz}$: $t = 100/f_o \text{Hz} \times 250\text{ms}$)
- See Figure 3.
- Measured in a 30kHz bandwidth.
- The MX365A measured with an input level of 308 mV @ 1kHz, in a 30 kHz bandwidth. The MX165A measured with an input level of 100 mV @ 1kHz, in a 30 kHz bandwidth.
- Per EIA 220-B.
- Ref. to 100 Hz.

M X-COM INC