
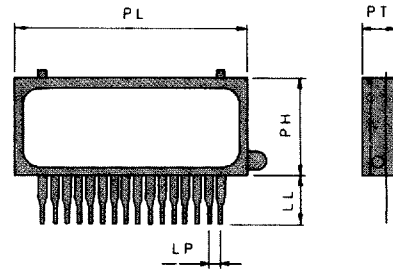


Table 3 For Digital Clock, Timer, Measuring meter and Others


Type No.	No. of Digits (Digits x lines)	Character Format, Symbol	Character Dimensions		Outline Dimensions					Fig. No.
			C.H (mm)	C.W (mm)	P.H (mm)	P.L (mm)	P.T (mm)	L.P (mm)	L.L (mm)	
FIP4D15	4	8.8:8.8	15.0	8.4	33.0±1.0	98.0±1.0	8.0±0.7	2.54	11.0	A-6
FIP4F8CS	4	8.8:8.8	7.6	3.6	24.5±1.0	55.4±1.0	6.5±0.7	2.54	8.7	B-5
FIP4H5	4	8888	5.0	2.5	14.5±1.0	41.0±1.0	6.5±0.7	2.54	8.0	A-4
FIP4Q8A	4	88:88	8.0	5.0	24.5±1.0	59.0±1.0	6.5±0.7	2.54	11.0	A-6
FIP5B15B	5	8.8.8.8.8	15.0	8.0	33.0±1.0	98.0±1.0	8.0±0.7	2.54	6.2	C-2
FIP5D8BS	5	AM PM 18:88	7.6	3.6	24.5±1.0	55.4±1.0	6.5±0.7	2.54	8.7	B-5
FIP6C13E	6	8.8.8.8.8.8	12.5	6.8	33.0±1.0	98.0±1.0	8.0±0.7	4.0	10.5	C-1
FIP6C15E	6	8.8.8.8.8.8	15.0	8.0	33.0±1.0	110.0±1.0	8.0±0.7	4.0	10.5	C-1
FIP6D15C	6	8.8.8.8.8.8	15.0	7.5	33.0±1.0	98.0±1.0	8.0±0.7	2.54	15.0	A-3
FIP6D15D	6	8.8.8.8.8.8	15.0	8.0	33.0±1.0	98.0±1.0	8.0±0.7	2.54	6.5	C-2
FIP6F13A	6	8.8.8.8.8.8	12.5	6.8	33.0±1.0	98.0±1.0	8.0±0.7	2.54	5.2	C-2
FIP7B13	7	8.8.8.8.8.8.8	13.0	6.0	33.0±1.0	98.0±1.0	8.0±0.7	2.54	7.4	A-5
FIP7B25A	7	8.8.8.8.8.8.8	25.4	12.0	48.0±1.0	164.0±1.0	10.5±0.7	4.0	10.5	C-1
FIP7P8C	7	FM AM 188.8 MHz kHz	8.0	4.6	24.5±1.0	76.0±1.0	6.1±0.7	2.54	7.5	A-2

Recommended Electrical Ratings											Note
Mode of Fil.	E _f (V _{r.m.s.})	I _f (mA _{r.m.s.})	Mode of Ope.	$e_b = e_c$ (V _{p-p}) * $E_b = E_c$ (V _{dc})	Duty	E _k (V _{dc})	i _b /dig (mA)	i _c /dig (mA)	(cd/m ²)	(fL)	
AC	4.0	95	dynamic	22	1/5	5.5	9.0	10.0	1028	(300)	
DC	1.9	81	static	*12	—	0	1.1	6.0	1370	(400)	
DC	1.5	40	dynamic	22	1/4	2	0.5	1.0	1030	(300)	
AC	2.4	81	dynamic	27	1/7	3.5	3.5	5.0	1030	(300)	
AC	3.6	135	dynamic	43	1/28	5	12.0	15.0	620	(180)	
DC	1.7	78	static	*12	—	0	0.8	6.0	1370	(400)	
AC	3.8	113	dynamic	26	1/7	4	5.0	7.0	685	(200)	
AC	4.1	161	dynamic	30 42	1/7.5	6	10.0 20.0	13.0 25.0	1370 3000	(400) (900)	
AC	3.7	110	dynamic	35	1/16	5	13.0	20.0	1030	(300)	
AC	3.7	110	dynamic	35	1/16	5	13.0	20.0	1030	(300)	
AC	3.2	100	dynamic	42	1/21	4	9.5	11.0	1230	(360)	
AC	3.3	104	dynamic	35	1/19	4	5.5	6.5	860	(250)	
AC	5.5	125	dynamic	44	1/7.5	8	17.5	14.0	690	(200)	
AC	2.3	106	dynamic	26	1/7	4	2.5	4.5	1370	(400)	


A-1

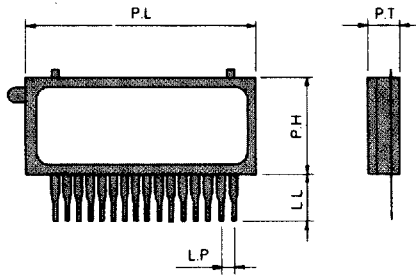


A-3

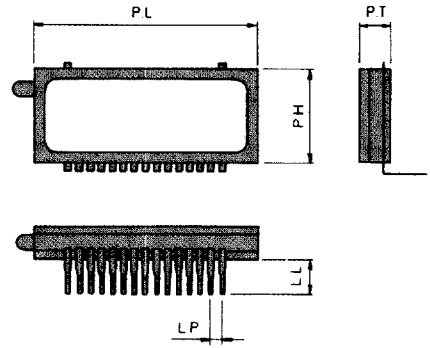


A-4

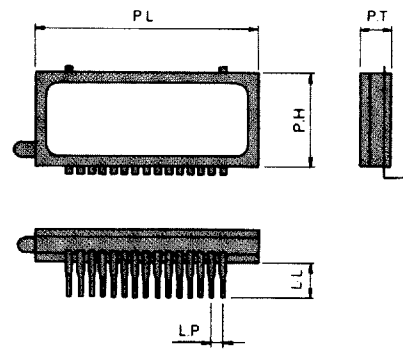


A-5

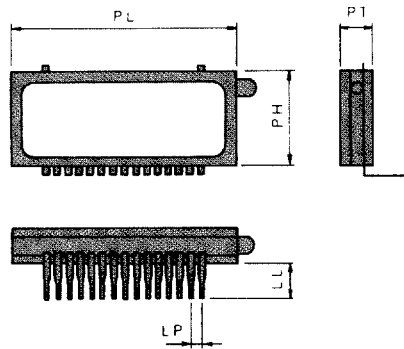


A-6

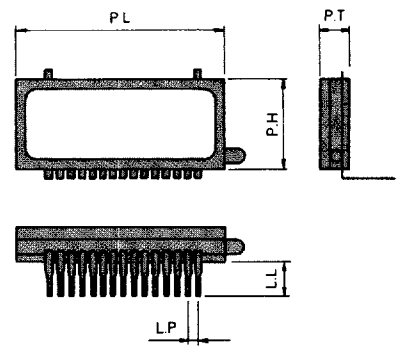


B-1

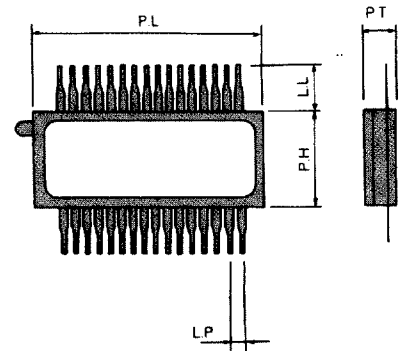


B-2

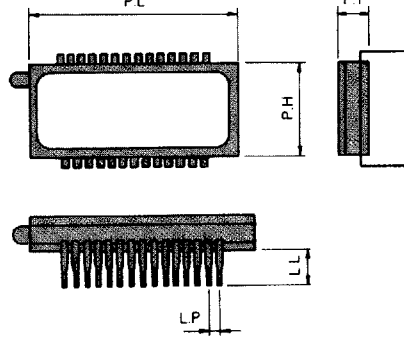


B-3

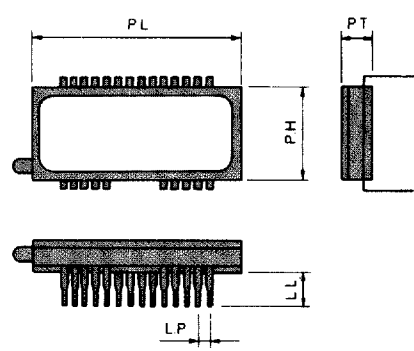


B-4

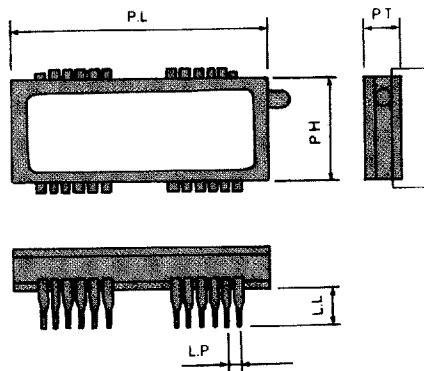


B-5

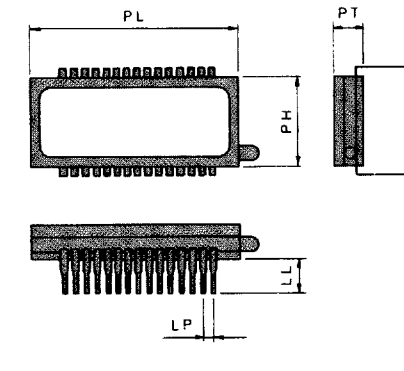


B-6

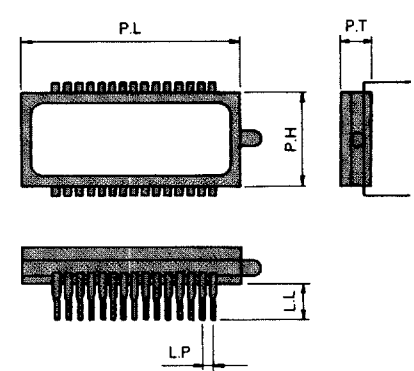


C-1

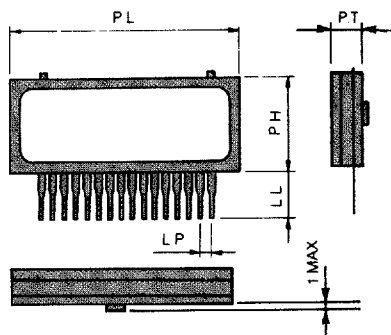


C-2

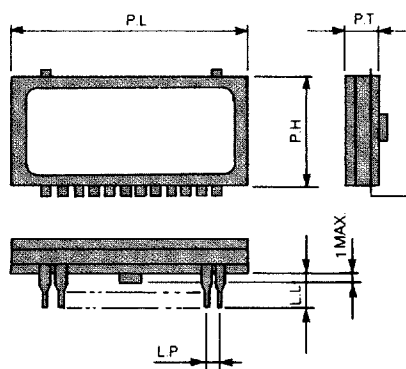


C-3

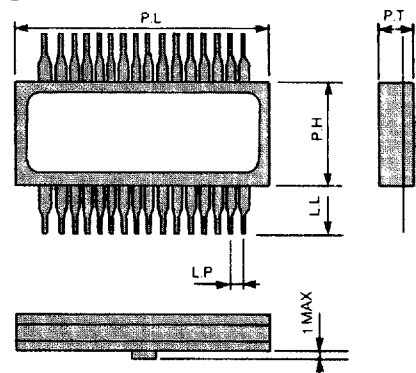


C-4

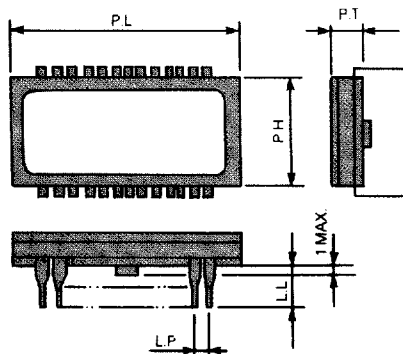


D-1

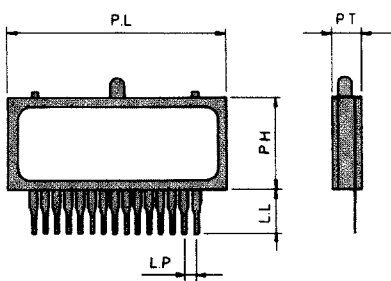

D-2

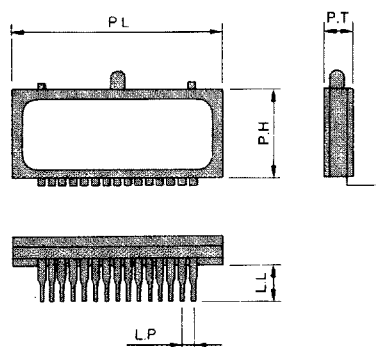

D-3

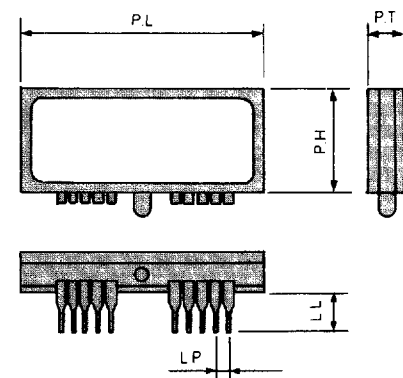

D-4

