


CURRENT COMPENSATED NOISE SUPPRESSION CHOKES

FE 2X Series - 2 Phase Common Mode Choke

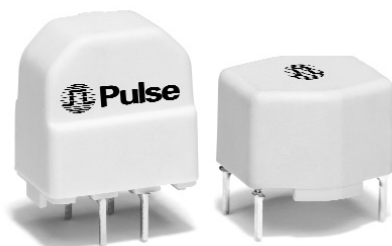

- Complies with VDE 565-2
- Materials meet UL-94V0 requirements
- Rated voltage: 250 Vac
- Withstanding voltage: 1500 Vac


Electrical Specifications @ 25°C — Operating Temperature 0°C to 60°C

Part Number (Vertical)	Part Number (Horizontal)	L (mH $\pm 30\%$)	Current (A)	DCR ($\Omega \pm 20\%$)	Resonance (kHz)
FE2X03-3-2	FE2X03-3-3	3.3	1.50	0.17	800
FE2X03-4-2	FE2X03-4-3	3.3	2.50	0.07	700
FE2X03-5-2	—	3.3	2.80	0.06	700
FE2X03-6-2	—	3.3	4.00	0.06	700
—	FE2X03-8-3	3.3	8.00	0.028	700
FE2X07-3-2	FE2X07-3-3	6.8	1.20	0.30	400
FE2X07-5-2	FE2X07-5-3	6.8	2.00	0.14	450
FE2X07-6-2	—	6.8	2.20	0.17	450
FE2X10-3-2	FE2X10-3-3	10	0.70	0.55	350
FE2X10-4-2	FE2X10-4-3	10	1.20	0.30	350
FE2X10-5-2	—	10	1.60	0.21	300
FE2X10-6-2	—	10	1.80	0.20	300
FE2X15-3-2	FE2X15-3-3	15	0.50	0.77	300
FE2X15-4-2	—	15	1.00	0.40	220
FE2X18-3-2	—	18	0.45	1.00	200
FE2X18-6-2	—	18	1.40	0.28	200
FE2X27-3-2	FE2X27-3-3	27	0.40	1.70	180
FE2X27-4-2	FE2X27-4-3	27	0.70	0.62	180
FE2X39-3-2	FE2X39-3-3	39	0.35	2.00	160
FE2X39-4-2	FE2X39-4-3	39	0.50	1.12	160
FE2X39-5-2	—	39	0.70	1.00	160
FE2X47-3-2	—	47	0.30	2.30	150
FE2X47-4-2	—	47	0.40	1.30	150


NOTE – Part Numbering System: **FEXLV-S-P**, where **LV** is the inductance value, **S** is the size code, and **P** is package style (2 = vertical and 3 = horizontal)

Schematics

Style 2 - Vertical Package



Style 3 - Horizontal Package





CURRENT COMPENSATED NOISE SUPPRESSION CHOKES

FE 2X Series - 2 Phase Common Mode Choke





Mechanicals

Style 2 - Vertical Package

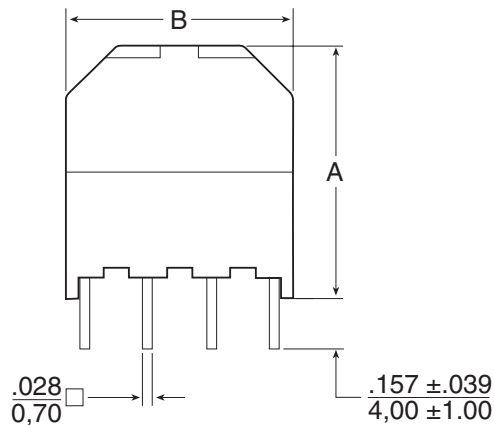

PINS VIEW

Style 3 - Horizontal Package

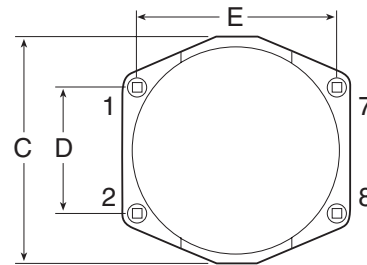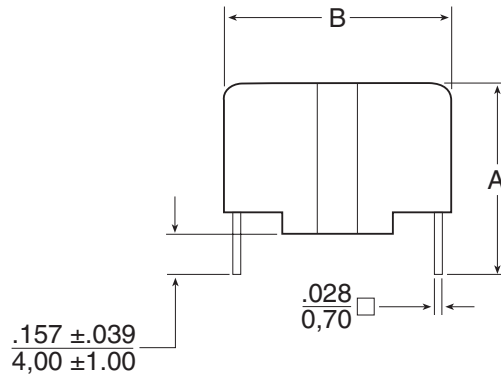

PINS VIEW

Size Code	A	B	C	D	E	F	G
3	.787 20,00	.709 18,00	.512 13,00	.591 15,00	.394 10,00	.197 5,00	.197 5,00
4	.984 25,00	.906 23,00	.610 15,50	.787 20,00	.492 12,50	.394 10,00	.197 5,00
5	1.181 30,00	1.063 27,00	.709 18,00	.886 22,50	.591 15,00	.492 12,50	.197 5,00
6	1.378 35,00	1.260 32,00	.709 18,00	1.083 27,50	.591 15,00	.492 12,50	.295 7,50

Size Code	A	B	C	D	E
3	.492 12,50	.689 17,50	.689 17,50	.394 10,00	.591 15,00
4	.591 15,00	.886 22,50	.886 22,50	.492 12,50	.787 20,00
5	.689 17,50	1.083 27,50	1.083 27,50	.591 15,00	.984 25,00
8	.984 25,00	1.693 43,00	1.654 42,00	.591 15,00	1.575 40,00

UNITED STATES (Worldwide)

12220 World Trade Drive
San Diego, CA 92128
U.S.A.
<http://www.pulseeng.com>
TEL: 858 674 8100
FAX: 858 674 8262

UNITED KINGDOM (Northern Europe)

1 & 2 Huxley Road
The Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

FRANCE (Southern Europe)

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

SINGAPORE (Southern Asia)

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 287 8998
FAX: 65 280 0080

TAIWAN, R.O.C. (Northern Asia)

3F-4, No. 81, Sec. 1
HsinTai Wu Road
Hsi-Chih, Taipei Hsien
Taiwan, R.O.C.
Tel: 886 2 2698 0228
FAX: 886 2 2698 0948

HONG KONG (China/Hong Kong)

19/F, China United Plaza
1008 Tai Nan West Street
Cheung Sha Wan, Kowloon
Hong Kong, China
TEL: 852 2788 6588
FAX: 852 2776 1055

DISTRIBUTOR

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.