



EW Series of 4.5 to 6 Watt DC/DC Converters



STANDARD DC/DC CONVERTERS WITH SINGLE OR DUAL REGULATED OUTPUTS. AN INTERNAL Π (Pi) INPUT FILTER IS STANDARD AND IS USED TO REDUCE REFLECTED RIPPLE CURRENT. ALL MODELS FEATURE A NICKEL-PLATED COPPER CASE WITH SIX-SIDED SHIELDING.



DIMENSIONS:
1.00" x 2.00" x 0.40"
(25.40) x (50.80) x (10.16)mm


FEATURES

- Industry Standard Pin Out
- Six-Sided Shielding
- 500 VDC I/O Isolation
- Continuous Short Circuit Protection
- Input Π (Pi) Filter


APPLICATIONS

- Telecommunication
- Data Processing Equipment
- Industrial Equipment
- Medical Equipment
- A/D and D/A Converters
- Distributed Power Systems

BLOCK DIAGRAM

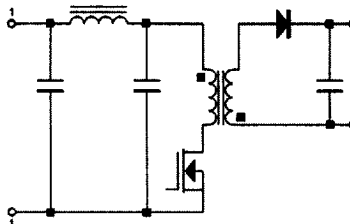

PART NUMBER SELECTION GUIDE

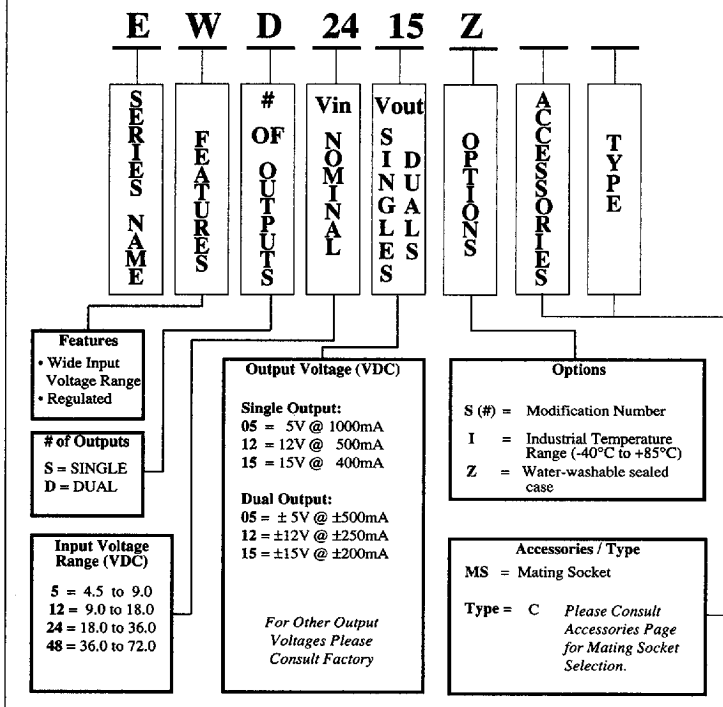

40

INTERNATIONAL POWER DEVICES, INC.

20 Linden Street, Boston, MA 02134 • Phone: (617)782-3331 • Fax: (617)782-7416



4853809 0000314 T28



EW Series of 4.5 to 6 Watt DC/DC Converters



PARAMETER	MIN	TYP	MAX	UNITS	CONDITIONS	NOTES:
GENERAL:						
Switching Frequency	170	200	240	KHz		1. No derating required up to a maximum case temperature of 85°C. See efficiency and thermal impedance data provided. Internal Power Dissipation = $P_{out} * (1 - \text{Eff}) / \text{Eff}$.
Isolation Voltage						
Input to Output	500			VDC	Note 5	
Input to Case				VDC	Note 5	
Output to Case				VDC	Note 5	
Isolation Resistance						2. Provided for input fuse selection.
Input to Output	10 ⁹			Ohms	Note 3	
Short Circuit Protection					Note 3	
ENVIRONMENTAL:						3. Continuous Short Circuit Protection is provided. For dual output units the short circuit current on each individual output is equivalent to the short circuit current for a single output unit.
Operating Temperature	-25		85	°C	Note 1	
Storage Temperature	-40		125	°C	Ambient	
Operating Humidity			95%		Non-Condensing	
Storage Humidity			95%		Non-Condensing	
INPUT:						4. Long term continuous operation in this mode is not recommended. Converter will auto-restart once short has been removed.
Input Voltage						
5 Vin	4.50	5.00	9.00	VDC		
12 Vin	9.00	12.00	18.00	VDC		
24 Vin	18.00	24.00	36.00	VDC		
48 Vin	36.00	48.00	72.00	VDC		
Input Current						
5 Vin			1.00	Amps	Note 2	
12 Vin			0.80	Amps	Note 2	
24 Vin			0.40	Amps	Note 2	
48 Vin			0.20	Amps	Note 2	
Input Ripple Current			20%	Iin max		5. For 48V input models, the case is connected to +Vin. For all other input voltages, the case is tied to either -Vout (Singles) or the Output Common (Duals).
Reverse Input Current			100%	Iin max		
OUTPUT:						
Singles:						
Voltage Accuracy			±1.00%	Vout	Full Load	
Load Regulation			±1.00%	Vout	10% to 100%	
Line Regulation			±1.00%	Vout	LL to HL	
Current Limit			130%	Iout	Note 3, Note 4	
Duals:						
Voltage Accuracy			±1.00%	Vout	Full Load	
+Vout			±1.00%	Vout	Full Load	
-Vout			±1.00%	Vout	Full Load	
Load Regulation			±1.00%	Vout	10% to 100%	
+Vout			±1.00%	Vout	10% to 100%	
-Vout			±1.00%	Vout	10% to 100%	
Line Regulation			±1.00%	Vout	LL to HL	
Current Limit			130%	Iout	Note 3, Note 4	
Temp. Coefficient			±0.02%	/ °C		
Voltage Stability			±0.05%	Vout		
Ripple and Noise			1.00%	Vout	p-p, 20 MHz BW	
Transient Response						
25% Step						
Load change			500	µS	1% Error Band	

* All specifications typical at +25°C Nominal Line and Full Load unless otherwise noted.

* Specifications subject to change without notice.



INTERNATIONAL POWER DEVICES, INC.

20 Linden Street, Boston, MA 02134 • Phone: (617)782-3331 • Fax: (617)782-7416



■ 4853809 0000315 964 ■




EW Series of 4.5 to 6 Watt DC/DC Converters



Notes: _____

BOTTOM VIEW

Mechanical tolerances are ± 0.04 "

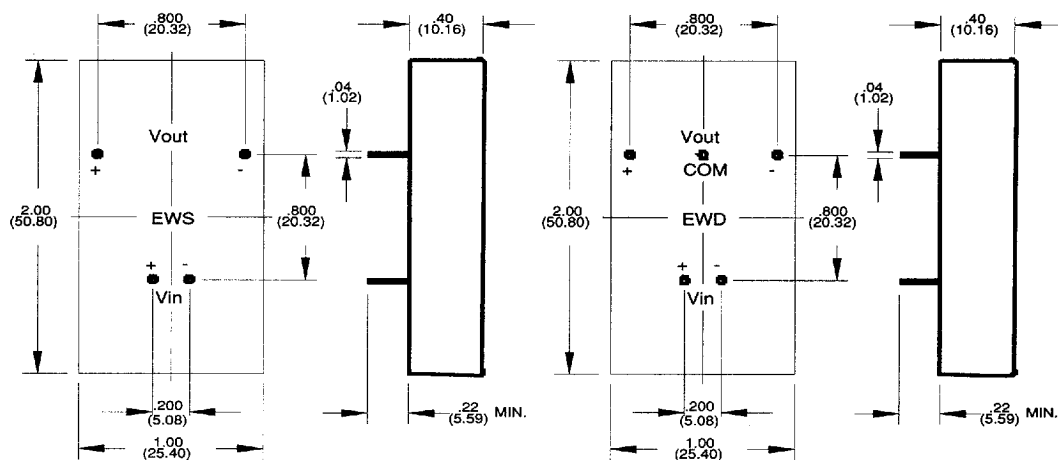

Specifications are subject to change without notice.

All Dimensions are in inches (MM)

42

INTERNATIONAL POWER DEVICES, INC.
20 Linden Street., Boston, MA 02134 • Phone: (617)782-3331 • Fax: (617)782-7416



4853809 0000316 8T0



EW Series of 4.5 to 6 Watt DC/DC Converters



PIN CONNECTIONS


PIN #	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	No Pin	Common
5	-Vout	-Vout

THERMAL IMPEDANCE


	Typical R _{θCA}
NATURAL CONVECTION	22°C/W
100 LFPM	18°C/W
200 LFPM	11°C/W
300 LFPM	8.9°C/W
400 LFPM	6.8°C/W

Thermal Impedance data depends upon many environmental factors and may vary from application to application. The numbers provided are intended as a guide. The exact thermal performance should be validated in each application.

EFFICIENCY vs. LOAD (Typical)



EFFICIENCY vs. Vin (Typical)



Notes: _____



INTERNATIONAL POWER DEVICES, INC.
20 Linden Street., Boston, MA 02134 • Phone: (617)782-3331 • Fax: (617)782-7416



■ 4853809 0000317 737 ■