

E-Series Surface Mount Mixer

5 - 1000 MHz

EMRS-2L, EMRSL-2L

V3.00

Features

- LO Power: +3 dBm
- Up to -1 dBm RF
- Surface Mount

Specifications @ 25°C

Frequency Range		
RF		5 - 1000 MHz
LO		5 - 1000 MHz
IF		DC - 1000 MHz
Conversion Loss (dB)		
10 - 500 MHz	Typical	Maximum
5 - 1000 MHz	6.5	8.0
	7.5	9.5
Isolation (dB)		
LO to RF	Typical	Minimum
5 - 50 MHz	60	40
50 - 500 MHz	40	20
500 - 1000 MHz	25	18
LO to IF		
5 - 50 MHz	55	30
50 - 500 MHz	30	20
500 - 1000 MHz	20	12

Operating Characteristics

Impedance	50 Ohms Nominal
RF input for 1dB Compression	-1 dBm

Ordering Information

Part No.	Packaging
EMRS-2L	SM-1 in Tubes
EMRS-2LTR	SM-1 in Forward Tape & Reel
EMRSL-2L	SM-24 in Tubes
EMRSL-2LTR	SM-24 in Forward Tape & Reel


Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	50 mW
Peak IF Current	40 mA
Storage Temperature	-55°C to 100°C
Operating Temperature	-55°C to 100°C
Pin Temperature (10 Seconds)	260°C

Pin Configuration


Function	Pin No.
LO	1
RF	4
IF	5
Ground	2,3,6

SM-1

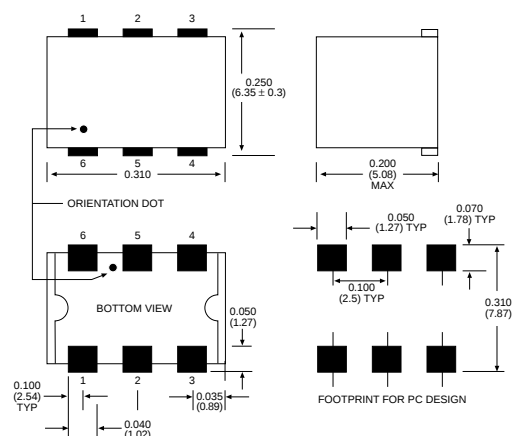

Dimensions in () are in mm.
Unless Otherwise Noted: .x = ±0.04 (1.00)
.xx = ±0.02 (0.50)
.xxx = ±0.010 (0.250)

SM-24

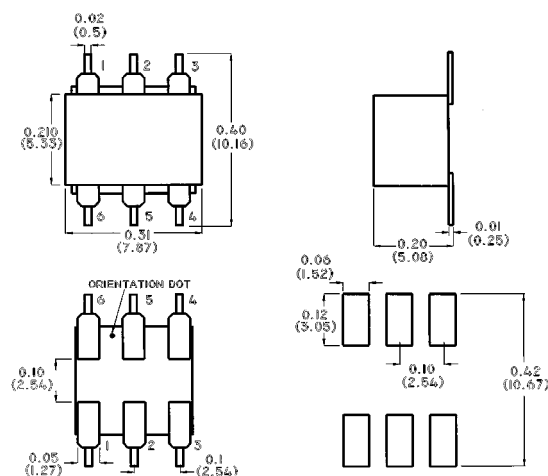

Dimensions in () are in mm.
Unless Otherwise Noted: .x = ±0.04 (1.00)
.xx = ±0.02 (0.50)
.xxx = ±0.010 (0.250)

Specifications Subject to Change Without Notice.

S 0072 B, S 0542 D

M/A-COM, Inc.

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 ■ Europe: Tel. +44 (1344) 869 595
Fax (800) 618-8883 Fax +81 (03) 3226-1451 Fax +44 (1344) 300 020