



# Voltage Detectors in 4-Bump (2 x 2) Chip-Scale Package

**MAX6406-MAX6411**

## General Description

The MAX6406-MAX6411 is a family of ultra-low power circuits used for monitoring battery, power-supply, and regulated system voltages. Each detector contains a precision bandgap reference comparator and is trimmed to specified trip threshold voltages. These devices provide excellent circuit reliability and low cost by eliminating external components and adjustments when monitoring system voltages from 2.5V to 5.0V. A manual reset input is also included.

The MAX6406-MAX6411 assert a signal whenever the  $V_{CC}$  supply voltage falls below a preset threshold. These devices are differentiated by their output logic configurations and preset threshold voltages. The MAX6406/MAX6409 (push-pull) and the MAX6408/MAX6411 (open-drain) have an active-low output (OUT is logic low when  $V_{CC}$  is below  $V_{TH}$ ). The MAX6407/MAX6410 have an active-high push-pull output (OUT is logic high when  $V_{CC}$  is below  $V_{TH}$ ). All parts are guaranteed to be in the correct output logic state for  $V_{CC}$  down to 1V. The detector is designed to ignore fast transients on  $V_{CC}$ . The MAX6406/MAX6407/MAX6408 have voltage thresholds between 2.20V and 3.08V in approximately 100mV increments. The MAX6409/MAX6410/MAX6411 have voltage thresholds between 3.30V and 4.63V in approximately 100mV increments.

Ultra-low supply current of 500nA (MAX6406/MAX6407/MAX6408) makes these parts ideal for use in portable equipment. These devices are available in 4-bump chip-scale packages (UCSP™).

## Applications

Portable/Battery-Powered Equipment  
Cell Phones  
PDAs  
MP3 Players  
Pagers

## Selector Guide

| PART    | NOMINAL $V_{TH}$ (V) | OUT/OUT Output Type    |
|---------|----------------------|------------------------|
| MAX6406 | 2.20 to 3.08         | Push-Pull, Active-Low  |
| MAX6407 | 2.20 to 3.08         | Push-Pull, Active-High |
| MAX6408 | 2.20 to 3.08         | Open-Drain, Active-Low |
| MAX6409 | 3.30 to 4.63         | Push-Pull, Active-Low  |
| MAX6410 | 3.30 to 4.63         | Push-Pull, Active-High |
| MAX6411 | 3.30 to 4.63         | Open-Drain, Active-Low |

## Features

- ◆ Tiny 4-Bump (2 x 2) Chip-Scale Package, (Package Pending Full Qualification—Expected Completion Date 6/30/01. See UCSP Reliability Section for More Details.)
- ◆ 70% Smaller Than SC70 Packages
- ◆ Ultra-Low 500nA Supply Current (MAX6406/MAX6407/MAX6408)
- ◆ Factory-Trimmed Reset Thresholds from 2.20V to 4.63V in Approximately 100mV Increments
- ◆  $\pm 2.5\%$  Threshold Accuracy ( $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ )
- ◆ Manual Reset Input
- ◆ Guaranteed OUT Valid to  $V_{CC} = 1.0\text{V}$
- ◆ Three Reset Output Logic Options: Active-Low Push-Pull, Active-High Push-Pull, and Active-Low Open-Drain
- ◆ Immune to Short  $V_{CC}$  Transients
- ◆ No External Components

## Ordering Information

| PART           | TEMP. RANGE                                    | PIN-PACKAGE |
|----------------|------------------------------------------------|-------------|
| MAX6406BS_ _-T | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ | UCSP-4      |
| MAX6407BS_ _-T | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ | UCSP-4      |
| MAX6408BS_ _-T | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ | UCSP-4      |
| MAX6409BS_ _-T | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ | UCSP-4      |
| MAX6410BS_ _-T | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ | UCSP-4      |
| MAX6411BS_ _-T | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ | UCSP-4      |

The MAX6406-MAX6411 are available in factory-set  $V_{CC}$  detector thresholds from 2.20V to 4.63V, in approximately 0.1V increments. Choose the desired threshold suffix from Table 1 and insert it in the blank space following "S". There are 21 standard versions with a required order increment of 2500 pieces. Sample stock is generally held on the standard versions only (Table 1). Required order increment is 10,000 pieces for nonstandard versions (Table 2). Contact factory for availability. All devices available in tape-and-reel only.

UCSP reliability is integrally linked to the user's assembly methods, circuit board material, and environment. Refer to the UCSP Reliability Notice in the UCSP Reliability section of this data sheet for more information.

**Pin Configuration appears at end of data sheet.**

UCSP is a trademark of Maxim Integrated Products, Inc.



# Voltage Detectors in 4-Bump (2 x 2) Chip-Scale Package

## ABSOLUTE MAXIMUM RATINGS

All voltages measured to GND unless otherwise noted.

|                                   |                       |
|-----------------------------------|-----------------------|
| VCC                               | -0.3V to +6V          |
| OUT/OUT                           | -0.3V to (VCC + 0.3V) |
| OUT (open-drain)                  | -0.3V to +6V          |
| MR                                | -0.3V to (VCC + 0.3V) |
| Input/Output Current into Any Pin | 20mA                  |

Continuous Power Dissipation (T<sub>A</sub> = +70°C)

|                                               |                 |
|-----------------------------------------------|-----------------|
| 4-Pin/Bump UCSP (derate 3.8mW/°C above +70°C) | 303mW           |
| Operating Temperature Range                   | -40°C to +85°C  |
| Junction Temperature                          | +150°C          |
| Storage Temperature Range                     | -65°C to +160°C |
| Bump Reflow Temperature                       | +235°C          |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

(VCC = 1.0V to 5.5V, T<sub>A</sub> = -40°C to +85°C, unless otherwise noted. Typical values are at VCC = 3V and T<sub>A</sub> = +25°C.) (Note1)

| PARAMETER                                                       | SYMBOL               | CONDITIONS                                                                                                            | MIN                                              | TYP                                | MAX                                              | UNITS  |
|-----------------------------------------------------------------|----------------------|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|------------------------------------|--------------------------------------------------|--------|
| Supply Voltage Range                                            | VCC                  | T <sub>A</sub> = 0°C to +70°C                                                                                         | 1.0                                              |                                    | 5.5                                              | V      |
|                                                                 |                      | T <sub>A</sub> = -40°C to +85°C                                                                                       | 1.2                                              |                                    | 5.5                                              |        |
| Supply Current                                                  | I <sub>CC</sub>      | MAX6406/MAX6407/MAX6408<br>VCC = 3.0V for V <sub>TH</sub> ≤ 2.93V,<br>VCC = 3.2V for V <sub>TH</sub> > 2.93V, no load |                                                  | 0.5                                | 1.0                                              | μA     |
|                                                                 |                      | VCC = 5.5V, no load                                                                                                   |                                                  | 1.0                                | 1.75                                             |        |
| Detector Threshold                                              | V <sub>TH</sub>      | Table 1                                                                                                               |                                                  |                                    |                                                  | V      |
|                                                                 |                      | T <sub>A</sub> = +25°C<br>T <sub>A</sub> = -40°C to +85°C                                                             | V <sub>TH</sub> - 1.5%<br>V <sub>TH</sub> - 2.5% | V <sub>TH</sub><br>V <sub>TH</sub> | V <sub>TH</sub> + 1.5%<br>V <sub>TH</sub> + 2.5% |        |
| Voltage Threshold Hysteresis                                    |                      | MAX6406/MAX6407/MAX6408                                                                                               |                                                  | 6.3                                |                                                  | mV     |
|                                                                 |                      | MAX6409/MAX6410/MAX6411                                                                                               |                                                  | 9.5                                |                                                  |        |
| Detector Threshold Tempco                                       | ΔV <sub>TH</sub> /°C |                                                                                                                       |                                                  | 40                                 |                                                  | ppm/°C |
| MR Input                                                        | V <sub>IL</sub>      | V <sub>TH</sub> > 4.0V                                                                                                |                                                  |                                    | 0.8                                              | V      |
|                                                                 | V <sub>IH</sub>      |                                                                                                                       | 2.0                                              |                                    |                                                  |        |
|                                                                 | V <sub>IL</sub>      | V <sub>TH</sub> ≤ 4.0V                                                                                                |                                                  |                                    | 0.2 × VCC                                        |        |
|                                                                 | V <sub>IH</sub>      |                                                                                                                       | 0.7 × VCC                                        |                                    |                                                  |        |
| MR Minimum Input Pulse Width                                    | t <sub>MD</sub>      |                                                                                                                       | 1                                                |                                    |                                                  | μs     |
| MR Glitch Rejection                                             |                      |                                                                                                                       |                                                  | 100                                |                                                  | ns     |
| MR to OUT/OUT Delay                                             |                      |                                                                                                                       |                                                  | 200                                |                                                  | ns     |
| MR Pullup Resistance                                            |                      |                                                                                                                       | 25                                               | 50                                 | 75                                               | kΩ     |
| Propagation Delay                                               |                      | VCC = (V <sub>TH</sub> + 100mV) to (V <sub>TH</sub> - 100mV)                                                          |                                                  | 20                                 |                                                  | μs     |
|                                                                 |                      | VCC = (V <sub>TH</sub> - 100mV) to (V <sub>TH</sub> + 100mV)                                                          |                                                  | 42                                 |                                                  |        |
| Startup Time                                                    |                      | VCC = 0 to V <sub>TH</sub> (min)                                                                                      |                                                  | 88                                 |                                                  | μs     |
| OUT Output Voltage Low<br>(MAX6406/MAX6408/MAX6409/<br>MAX6411) | V <sub>OL</sub>      | I <sub>SINK</sub> = 1.6mA, VCC ≥ 2.1V, OUT asserted                                                                   |                                                  |                                    | 0.3                                              | V      |
|                                                                 |                      | I <sub>SINK</sub> = 100μA, VCC ≥ 1.2V, OUT asserted                                                                   |                                                  |                                    | 0.4                                              |        |
| OUT Output Voltage High<br>(MAX6406/MAX6409)                    | V <sub>OH</sub>      | I <sub>SOURCE</sub> = 500μA, VCC = 3.2V, MAX6406,<br>OUT not asserted                                                 |                                                  |                                    | 0.8 × VCC                                        | V      |
|                                                                 |                      | I <sub>SOURCE</sub> = 800μA, VCC = 4.5V,<br>V <sub>TH</sub> ≤ 4.38V, OUT not asserted                                 |                                                  |                                    | 0.8 × VCC                                        |        |
|                                                                 |                      | I <sub>SOURCE</sub> = 800μA, VCC = V <sub>TH</sub> (max),<br>V <sub>TH</sub> ≥ 4.5V, OUT not asserted                 |                                                  |                                    | 0.8 × VCC                                        |        |

# Voltage Detectors in 4-Bump (2 x 2) Chip-Scale Package

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{CC} = 1.0V$  to  $5.5V$ ,  $T_A = -40^{\circ}C$  to  $+85^{\circ}C$ , unless otherwise noted. Typical values are at  $V_{CC} = 3V$  and  $T_A = +25^{\circ}C$ .) (Note1)



| PARAMETER                                                   | SYMBOL   | CONDITIONS                                                                           | MIN                 | TYP | MAX | UNITS   |
|-------------------------------------------------------------|----------|--------------------------------------------------------------------------------------|---------------------|-----|-----|---------|
| OUT Output Voltage<br>(MAX6407/MAX6410)                     | $V_{OH}$ | $I_{SOURCE} = 500\mu A$ , $V_{CC} \geq 2.1V$ , OUT asserted                          | $0.8 \times V_{CC}$ |     |     | V       |
|                                                             |          | $I_{SOURCE} = 50\mu A$ , $V_{CC} \geq 1.2V$ , OUT asserted                           | $0.8 \times V_{CC}$ |     |     |         |
|                                                             | $V_{OL}$ | $I_{SINK} = 1.2mA$ , $V_{CC} \geq 3.2V$ , OUT not asserted, MAX6407 only             |                     |     | 0.3 |         |
|                                                             |          | $I_{SINK} = 3.2mA$ , $V_{CC} \geq 4.5V$ , OUT not asserted, $V_{TH} \leq 4.38V$      |                     |     | 0.4 |         |
|                                                             |          | $I_{SINK} = 3.2mA$ , $V_{CC} = V_{TH} (max)$ , $V_{TH} \geq 4.5V$ , OUT not asserted |                     |     | 0.4 |         |
| Open-Drain $\overline{OUT}$ Output Leakage Current (Note 2) |          | $\overline{OUT}$ not asserted                                                        |                     |     | 0.1 | $\mu A$ |

**Note 1:** Production testing done at  $+25^{\circ}C$  only. Overtemperature limits are guaranteed by design and not production tested.

**Note 2:** Guaranteed by design.

## Typical Operating Characteristics



( $T_A = +25^{\circ}C$ , unless otherwise noted.)

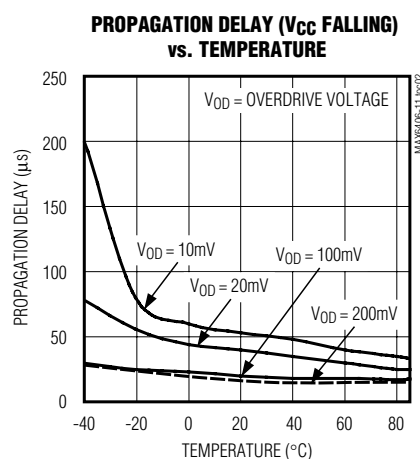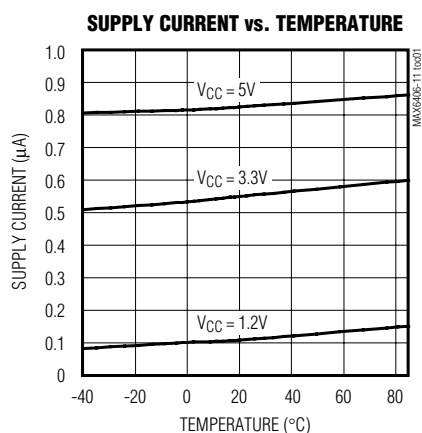

# Voltage Detectors in 4-Bump (2 x 2) Chip-Scale Package

## Typical Operating Characteristics (continued)

(T<sub>A</sub> = +25°C, unless otherwise noted.)

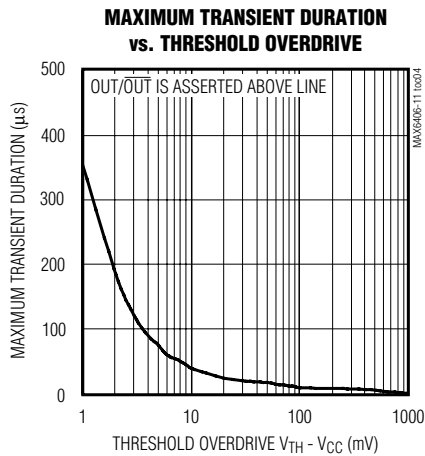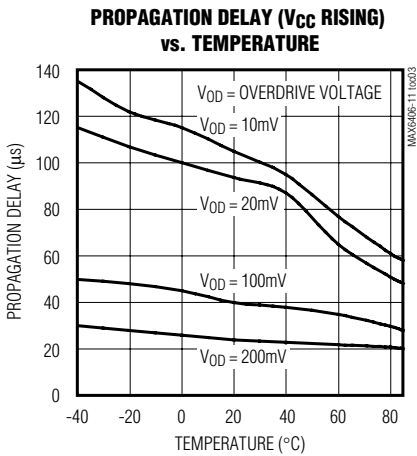

## Pin Description

| PIN                                |                 | NAME                    | FUNCTION                                                                                                                                                                                                                    |
|------------------------------------|-----------------|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAX6406/MAX6408<br>MAX6409/MAX6411 | MAX6407/MAX6410 |                         |                                                                                                                                                                                                                             |
| A1                                 | A1              | GND                     | Ground                                                                                                                                                                                                                      |
| B1                                 | —               | $\overline{\text{OUT}}$ | Active-Low Output. $\overline{\text{OUT}}$ remains low while V <sub>CC</sub> is below the threshold. $\overline{\text{OUT}}$ is open-drain on the MAX6408/MAX6411 and push-pull on the MAX6406/MAX6409.                     |
| —                                  | B1              | OUT                     | Active-High Output. OUT remains high while V <sub>CC</sub> is below the threshold.                                                                                                                                          |
| B2                                 | B2              | $\overline{\text{MR}}$  | Active-Low Manual Reset. Internal 50kΩ pullup to V <sub>CC</sub> . Pull low to assert the output. OUT remains asserted as long as $\overline{\text{MR}}$ is low. Leave unconnected or connect to V <sub>CC</sub> if unused. |
| A2                                 | A2              | V <sub>CC</sub>         | Supply Voltage and Input for the Voltage Detector.                                                                                                                                                                          |

## Voltage Detectors in 4-Bump (2 x 2) Chip-Scale Package

**Table 1. Factory-Trimmed Thresholds**

| PART                                | SUFFIX | Threshold Voltage, $V_{TH}$ (V) |       |       |                                                     |       |
|-------------------------------------|--------|---------------------------------|-------|-------|-----------------------------------------------------|-------|
|                                     |        | $T_A = +25^{\circ}\text{C}$     |       |       | $T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$ |       |
|                                     |        | MIN                             | TYP   | MAX   | MIN                                                 | MAX   |
| MAX6406BS<br>MAX6407BS<br>MAX6408BS | 22*    | 2.167                           | 2.200 | 2.233 | 2.145                                               | 2.250 |
|                                     | 23*    | 2.285                           | 2.320 | 2.355 | 2.262                                               | 2.375 |
|                                     | 24     | 2.364                           | 2.400 | 2.436 | 2.340                                               | 2.460 |
|                                     | 25     | 2.462                           | 2.500 | 2.537 | 2.437                                               | 2.562 |
|                                     | 26*    | 2.591                           | 2.630 | 2.669 | 2.564                                               | 2.692 |
|                                     | 27     | 2.660                           | 2.700 | 2.741 | 2.633                                               | 2.768 |
|                                     | 28     | 2.758                           | 2.800 | 2.842 | 2.730                                               | 2.870 |
|                                     | 29*    | 2.886                           | 2.930 | 2.974 | 2.857                                               | 3.000 |
|                                     | 30     | 2.955                           | 3.000 | 3.045 | 2.925                                               | 3.075 |
|                                     | 31*    | 3.034                           | 3.080 | 3.126 | 3.003                                               | 3.150 |
| MAX6409BS<br>MAX6410BS<br>MAX6411BS | 33     | 3.250                           | 3.300 | 3.350 | 3.217                                               | 3.383 |
|                                     | 34     | 3.349                           | 3.400 | 3.451 | 3.315                                               | 3.485 |
|                                     | 35     | 3.447                           | 3.500 | 3.552 | 3.412                                               | 3.587 |
|                                     | 36     | 3.546                           | 3.600 | 3.654 | 3.510                                               | 3.690 |
|                                     | 37     | 3.644                           | 3.700 | 3.755 | 3.607                                               | 3.792 |
|                                     | 38     | 3.743                           | 3.800 | 3.857 | 3.705                                               | 3.895 |
|                                     | 39     | 3.841                           | 3.900 | 3.958 | 3.802                                               | 3.997 |
|                                     | 40     | 3.940                           | 4.000 | 4.060 | 3.900                                               | 4.100 |
|                                     | 41     | 4.038                           | 4.100 | 4.161 | 3.997                                               | 4.202 |
|                                     | 42     | 4.137                           | 4.200 | 4.263 | 4.095                                               | 4.305 |
|                                     | 43     | 4.235                           | 4.300 | 4.364 | 4.192                                               | 4.407 |
|                                     | 44*    | 4.314                           | 4.380 | 4.446 | 4.270                                               | 4.489 |
|                                     | 45     | 4.432                           | 4.500 | 4.567 | 4.387                                               | 4.612 |
|                                     | 46*    | 4.560                           | 4.630 | 4.699 | 4.514                                               | 4.746 |

Factory-trimmed voltage thresholds are available in approximately 100mV increments with a 1.5% room temperature variance.

**Note:** Parts marked with an asterisk (\*) are standard versions.

# Voltage Detectors in 4-Bump (2 x 2) Chip-Scale Package

Table 2. Device Marking Codes

| PART                  | TOP MARK | PART                  | TOP MARK | PART                  | TOP MARK |
|-----------------------|----------|-----------------------|----------|-----------------------|----------|
| <b>MAX6406</b> BS31-T | AEF      | <b>MAX6407</b> BS31-T | AEP      | <b>MAX6408</b> BS31-T | AEZ      |
| MAX6406BS30-T         | AEE      | MAX6407BS30-T         | AEO      | MAX6408BS30-T         | AEY      |
| MAX6406BS29-T         | AED      | MAX6407BS29-T         | AEN      | MAX6408BS29-T         | AEX      |
| MAX6406BS28-T         | AEC      | MAX6407BS28-T         | AEM      | MAX6408BS28-T         | AEW      |
| MAX6406BS27-T         | AEB      | MAX6407BS27-T         | AEL      | MAX6408BS27-T         | AEV      |
| MAX6406BS26-T         | AEA      | MAX6407BS26-T         | AEK      | MAX6408BS26-T         | AEU      |
| MAX6406BS25-T         | ADZ      | MAX6407BS25-T         | AEJ      | MAX6408BS25-T         | AET      |
| MAX6406BS24-T         | ADY      | MAX6407BS24-T         | AEI      | MAX6408BS24-T         | AES      |
| MAX6406BS23-T         | ADX      | MAX6407BS23-T         | AEH      | MAX6408BS23-T         | AER      |
| MAX6406BS22-T         | ADW      | MAX6407BS22-T         | AEG      | MAX6408BS22-T         | AEQ      |

| PART                  | TOP MARK | PART                  | TOP MARK | PART                  | TOP MARK |
|-----------------------|----------|-----------------------|----------|-----------------------|----------|
| <b>MAX6409</b> BS46-T | AFN      | <b>MAX6410</b> BS46-T | AAX      | <b>MAX6411</b> BS46-T | ABL      |
| MAX6409BS45-T         | AFM      | MAX6410BS45-T         | AAW      | MAX6411BS45-T         | ABK      |
| MAX6409BS44-T         | AFL      | MAX6410BS44-T         | AAV      | MAX6411BS44-T         | ABJ      |
| MAX6409BS43-T         | AFK      | MAX6410BS43-T         | AAU      | MAX6411BS43-T         | ABI      |
| MAX6409BS42-T         | AFJ      | MAX6410BS42-T         | AAT      | MAX6411BS42-T         | ABH      |
| MAX6409BS41-T         | AFI      | MAX6410BS41-T         | AAS      | MAX6411BS41-T         | ABG      |
| MAX6409BS40-T         | AFH      | MAX6410BS40-T         | AAR      | MAX6411BS40-T         | ABF      |
| MAX6409BS39-T         | AFG      | MAX6410BS39-T         | AAQ      | MAX6411BS39-T         | ABE      |
| MAX6409BS38-T         | AFF      | MAX6410BS38-T         | AAP      | MAX6411BS38-T         | ABD      |
| MAX6409BS37-T         | AFE      | MAX6410BS37-T         | AAO      | MAX6411BS37-T         | ABC      |
| MAX6409BS36-T         | AFD      | MAX6410BS36-T         | AAN      | MAX6411BS36-T         | ABB      |
| MAX6409BS35-T         | AFC      | MAX6410BS35-T         | AAM      | MAX6411BS35-T         | ABA      |
| MAX6409BS34-T         | AFB      | MAX6410BS34-T         | AAL      | MAX6411BS34-T         | AAZ      |
| MAX6409BS33-T         | AFA      | MAX6410BS33-T         | AAK      | MAX6411BS33-T         | AAY      |

## Detailed Description

### Manual Reset Input

Many  $\mu$ P-based products require manual reset capability, allowing the operator, a test technician, or external logic circuit to initiate a reset. A logic low on  $\overline{\text{MR}}$  asserts  $\text{OUT}/\overline{\text{OUT}}$ .  $\text{OUT}/\overline{\text{OUT}}$  remains asserted while  $\overline{\text{MR}}$  is low. This input has an internal 50k $\Omega$  pullup resistor, so it can be left open if it is not used.  $\overline{\text{MR}}$  can be driven with TTL or CMOS logic levels, or with open-drain/collector outputs. Connect a normally open momentary switch from  $\overline{\text{MR}}$  to GND to create a manual reset function. If  $\overline{\text{MR}}$  is driven from long cables or if the device is used in a noisy environment, connect a 0.1 $\mu$ F capacitor from  $\overline{\text{MR}}$  to ground to provide additional noise immunity.

## Applications Information

### Interfacing to Different Logic Voltage Components

The MAX6408/MAX6411 have an active-low, open-drain output. This output structure will sink current when  $\overline{\text{OUT}}$  is asserted. Connect a pullup resistor from  $\overline{\text{OUT}}$  to any supply voltage up to 5.5V (Figure 1). Select a resistor value large enough to allow a valid logic low (see *Electrical Characteristics*), and small enough to register a logic high while supplying all input currents and leakage paths connected to the  $\overline{\text{OUT}}$  line.

# Voltage Detectors in 4-Bump (2 x 2) Chip-Scale Package

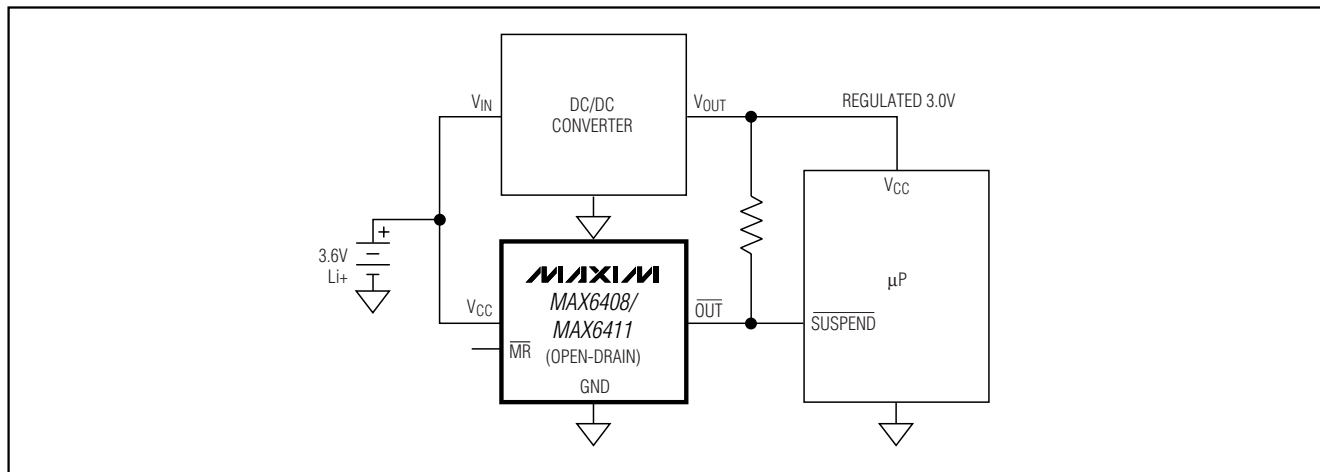


Figure 1. Interfacing to Different Logic Voltage Components

## Negative-Going VCC Transients

These devices are relatively immune to short-duration, negative-going VCC transients (glitches).

The *Typical Operating Characteristics* show the Maximum Transient Duration vs. Threshold Overdrive graph, for which output pulses are not generated. The graph shows the maximum pulse width that a negative-going VCC transient may typically have before the devices issue output signals. As the amplitude of the transient increases, the maximum allowable pulse width decreases.

## UCSP Reliability

The chip-scale package (UCSP) represents a unique packaging form factor that may not perform equally to a packaged product through traditional mechanical reliability tests. CSP reliability is integrally linked to the user's assembly methods, circuit board material, and usage environment. The user should closely review these areas when considering use of a CSP package. Performance through Operating Life Test and Moisture Resistance remains uncompromised as it is primarily determined by the wafer-fabrication process.


Mechanical stress performance is a greater consideration for a CSP package. CSPs are attached through direct solder contact to the user's PC board, foregoing the inherent stress relief of a packaged product lead frame. Solder joint contact integrity must be considered. Information on Maxim's qualification plan, test data, and usage recommendations are detailed in the UCSP application note, which can be found on Maxim's website at [www.maxim-ic.com](http://www.maxim-ic.com).

## Chip Information

TRANSISTOR COUNT: 512


PROCESS: BiCMOS

## Pin Configuration

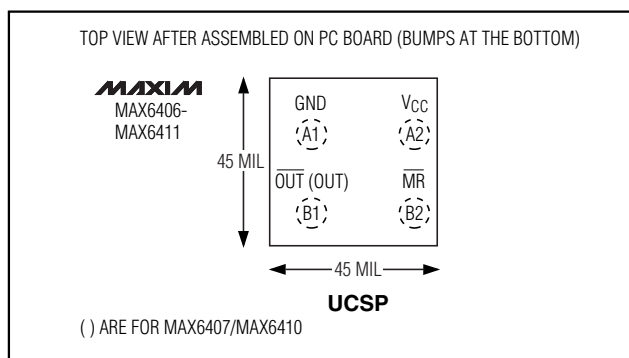


# Voltage Detectors in 4-Bump (2 x 2) Chip-Scale Package


## Package Information



TOP VIEW

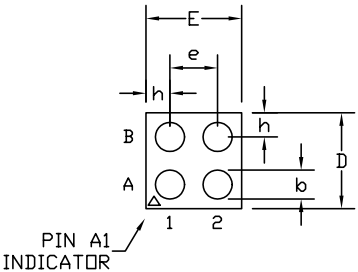

BOTTOM VIEW



SIDE VIEW

| SYMBOL | DIMENSIONS     |
|--------|----------------|
| A      | 0.022 ±.002    |
| E      | 0.040 ±.002    |
| D      | 0.040 ±.002    |
| e      | 0.0197 BASIC   |
| b      | ∅ 0.0120 BASIC |
| A1     | 0.009±.0015    |
| A2     | 0.013 Ref.     |
| h      | 0.010 Ref.     |

4L UCSP 2x2.EPS

NOTES:  
1. ALL DIMENSIONS ARE IN INCHES.  
2. MEETS JEDEC MO195.

|                                         |                                 |               |
|-----------------------------------------|---------------------------------|---------------|
|                                         |                                 |               |
| PROPRIETARY INFORMATION                 |                                 |               |
| TITLE:<br>PACKAGE OUTLINE, 4L UCSP, 2x2 |                                 |               |
| APPROVAL                                | DOCUMENT CONTROL NO.<br>21-0117 | REV.<br>A 1/1 |

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

8 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**