


E-Series Diplexer 5 – 860 MHz




Features

- Surface Mount
- Impedance 75 Ohms Nominal



SM-82 Package

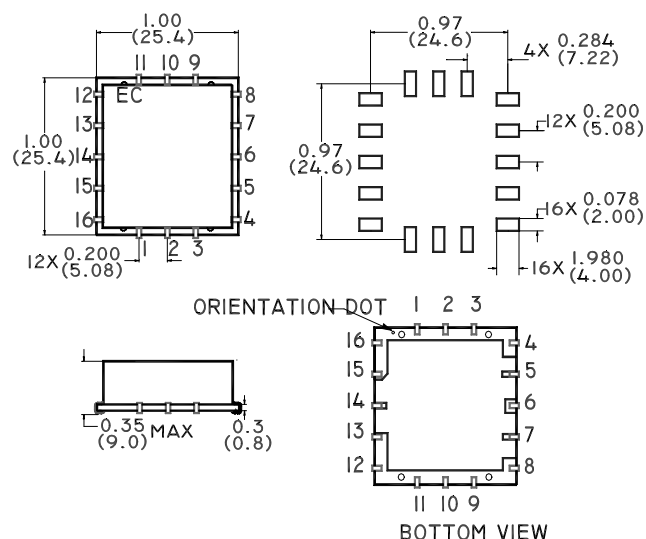

Description

M/A-COM's EDF-1 is a Low Cost, Non Hermetically Sealed Diplex Filter unit designed for CATV applications.

Electrical Specifications @ 25°C

Parameter	Units	Minimum	Typical	Maximum
Frequency Range	5 - 860 MHz			
Low Pass Cutoff	40 MHz	—	—	—
Low Pass Reject	51 MHz	—	—	—
High Pass Cutoff	51 MHz	—	—	—
High Pass Reject	40 MHz	—	—	—
Insertion Loss				
Low Pass 5 - 40 MHz PassBand	dB	—	0.5	1.0
Low Pass 51 - 860 MHz StopBand	dB	40.0	50.0	—
High Pass 5 - 40 MHz StopBand	dB	40.0	50.0	—
High Pass 51 - 860 MHz PassBand	dB	—	1.0	2.0
Insertion Loss Flatness *				
5 - 40 MHz	dB	—	—	0.5
51 - 860 MHz	dB	—	—	0.5
Crossover Band Isolation				
40 - 51 MHz	dB	30	35	—
Return Loss Input Port				
5 - 40 MHz	dB	14	18	—
51 - 860 MHz	dB	14	18	—
Return Loss Low Pass Port				
5 - 40 MHz	dB	14	18	—
Return Loss High Pass Port				
51 - 860 MHz	dB	14	18	—

Note *: Flatness is defined as any response change within a 10 MHz frequency span therefore the flatness spec is intended to mean that no change of 0.5dB, within a 10 MHz frequency span anywhere in the pass band of a diplex filter will be permitted.

V2.00 S 1286 B

Absolute Maximum Ratings


Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Storage Temperature	-20°C to +85°C

Functional Configuration


Function	Pin No.
Input	14
Low Pass	7
High Pass	5
Ground	15, 16, 1 - 4, 6, 8 - 13
Not Connected	—

Typical Performance @ +25°C


Input Return Loss

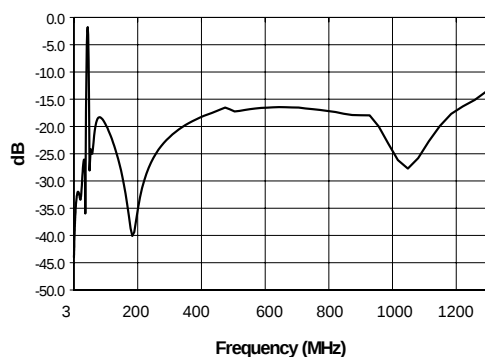


Isolation

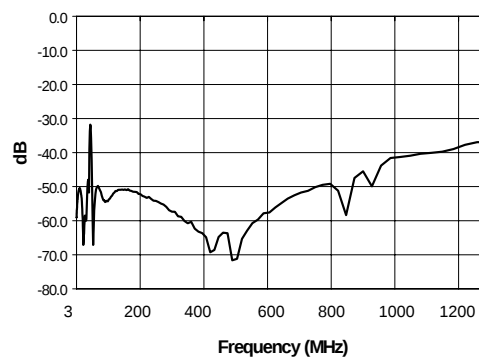


Low Pass Filter Insertion Loss

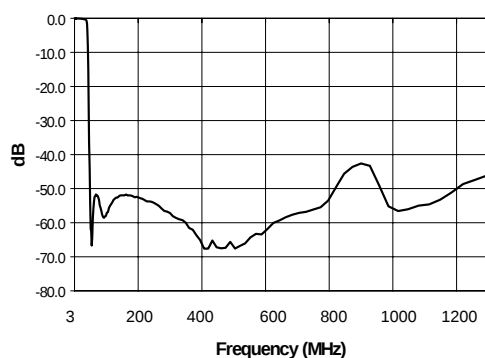


High Pass Filter Insertion Loss

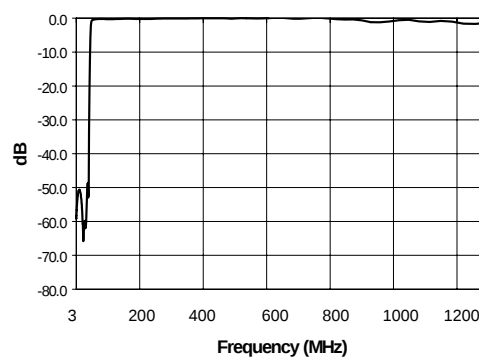

Low Pass Filter Output Return Loss

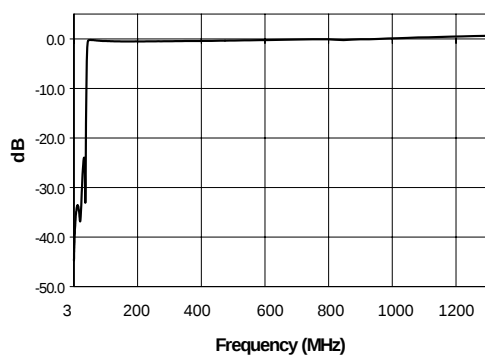

High Pass Filter Output Return Loss

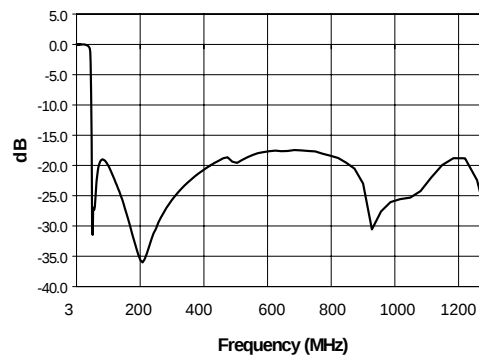

V2.00 S 1286 B



www.macom.com

M/A-COM Division of AMP Incorporated ■ North America: Tel. (800) 366-2266, Fax (800) 618-8883 ■ Asia/Pacific: Tel. +85 2 2111 8088, Fax +85 2 2111 8087 ■ Europe: Tel. +44 (1344) 869 595, Fax +44 (1344) 300 020

AMP and Connecting at a Higher Level are trademarks.
Specifications subject to change without notice.

